



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[ATLAS]**  
Machine Id  
**VOLVO L70H 624670**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP432216</b>	VCP414743	---
Sample Date		Client Info		<b>20 Dec 2023</b>	18 Sep 2023	---
Machine Age	hrs	Client Info		<b>2474</b>	1489	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>99</b>	131	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.8</b>	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.8</b>	18.9	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>1</b>	3	---
Boron	ppm	ASTM D5185m	250	<b>22</b>	0	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>43</b>	61	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	450	<b>478</b>	441	---
Calcium	ppm	ASTM D5185m	3000	<b>1699</b>	1824	---
Phosphorus	ppm	ASTM D5185m	1150	<b>910</b>	1090	---
Zinc	ppm	ASTM D5185m	1350	<b>1214</b>	1340	---
Sulfur	ppm	ASTM D5185m	4250	<b>2897</b>	3458	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.2</b>	14.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>10.1</b>	8.8	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.3</b>	13.4	---

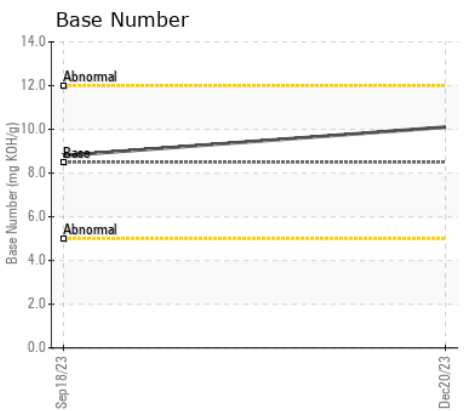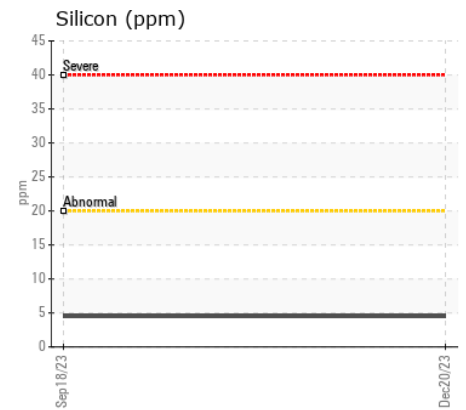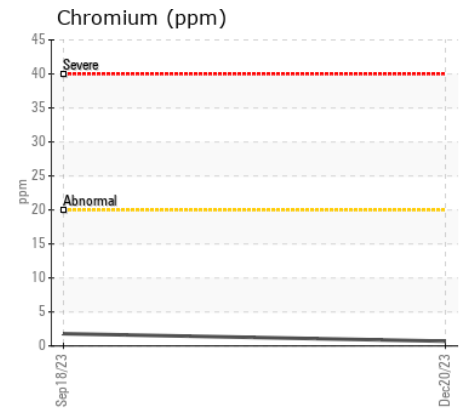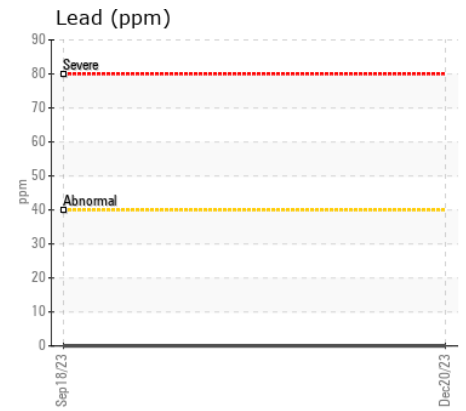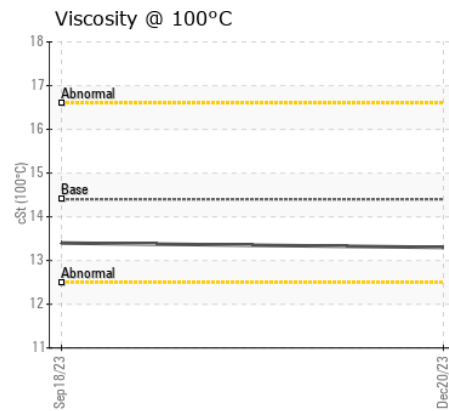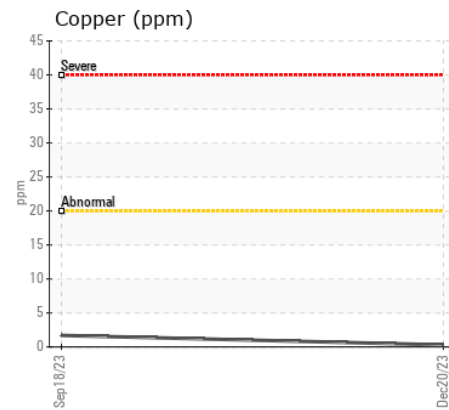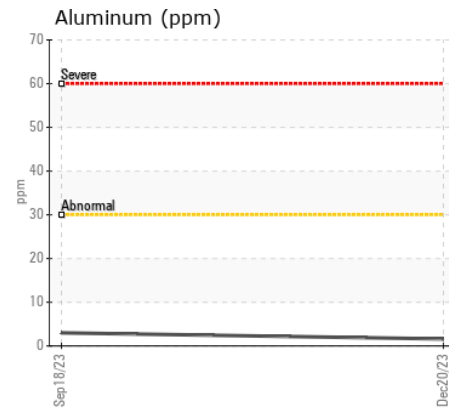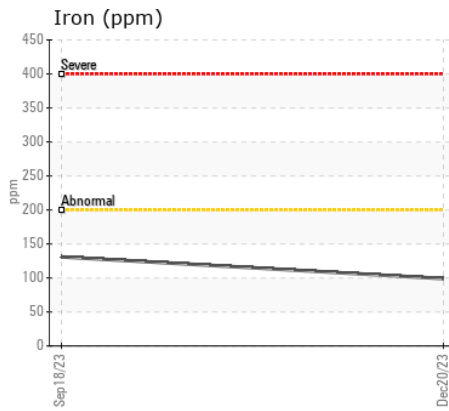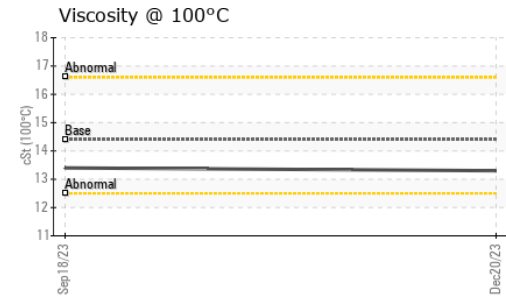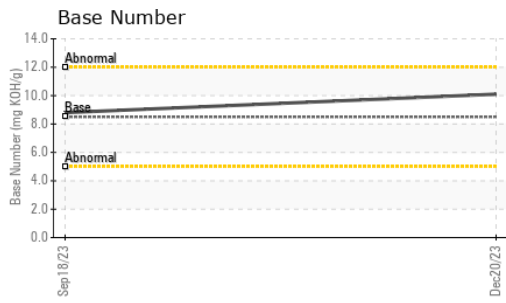

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP432216 **Received** : 11 Jan 2024  
**Lab Number** : 06057739 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10823688 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233