



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**859-1857**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>RPL0017296</b>  | RPL0013272  | RPL0013285  |
| Sample Date    |     | Client Info |           | <b>03 Jan 2024</b> | 08 Sep 2023 | 08 Aug 2023 |
| Machine Age    | mls | Client Info |           | <b>118310</b>      | 112156      | 111259      |
| Oil Age        | mls | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | mls | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Not Changd</b>  | Not Changd  | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | N/A         |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >100 | <b>14</b>    | 8    | 34   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | 2    |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>0</b>     | 0    | <1   |
| Titanium     | ppm    | ASTM D5185m |      | <b>0</b>     | <1   | <1   |
| Silver       | ppm    | ASTM D5185m | >3   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>9</b>     | 6    | 14   |
| Lead         | ppm    | ASTM D5185m | >40  | <b>0</b>     | <1   | <1   |
| Copper       | ppm    | ASTM D5185m | >330 | <b>&lt;1</b> | <1   | 2    |
| Tin          | ppm    | ASTM D5185m | >15  | <b>0</b>     | <1   | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

## CONTAMINATION







There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>5</b>       | 7     | 7     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>7</b>       | 8     | 21    |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.3</b>     | 0.1   | 0.5   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>9.0</b>     | 5.7   | 11.3  |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>21.6</b>    | 20.6  | 22.4  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |     |             |      |      |
|------------------|----------|-------------|-----|-------------|------|------|
| Sodium           | ppm      | ASTM D5185m |     | <b>2</b>    | 2    | 4    |
| Boron            | ppm      | ASTM D5185m | 0   | <b>47</b>   | 81   | 40   |
| Barium           | ppm      | ASTM D5185m | 0   | <b>0</b>    | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 0   | <b>53</b>   | 58   | 68   |
| Manganese        | ppm      | ASTM D5185m |     | <b>0</b>    | <1   | 1    |
| Magnesium        | ppm      | ASTM D5185m | 0   | <b>520</b>  | 636  | 580  |
| Calcium          | ppm      | ASTM D5185m |     | <b>1539</b> | 1825 | 1653 |
| Phosphorus       | ppm      | ASTM D5185m |     | <b>690</b>  | 819  | 756  |
| Zinc             | ppm      | ASTM D5185m |     | <b>921</b>  | 1042 | 918  |
| Sulfur           | ppm      | ASTM D5185m |     | <b>2324</b> | 3186 | 2896 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25 | <b>21.7</b> | 18.4 | 24.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.4 | <b>8.5</b>  | 9.0  | 6.3  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14  | <b>12.8</b> | 13.3 | 13.1 |

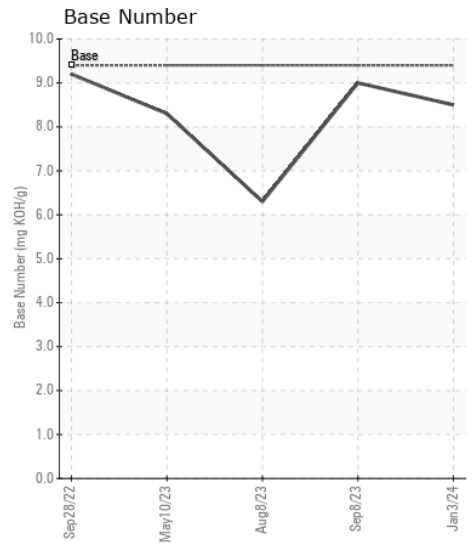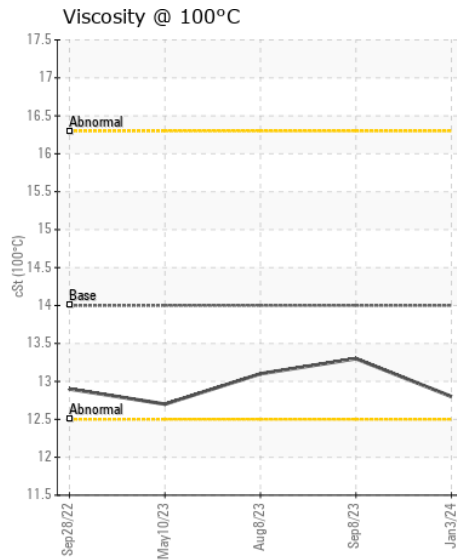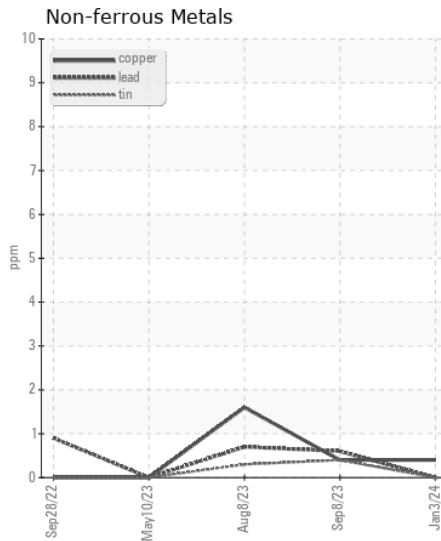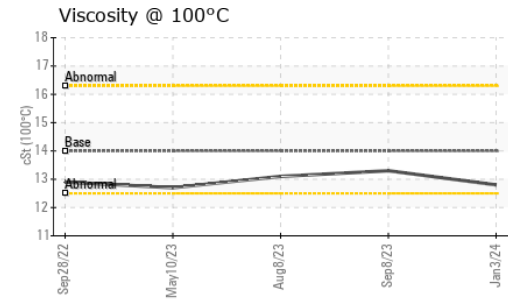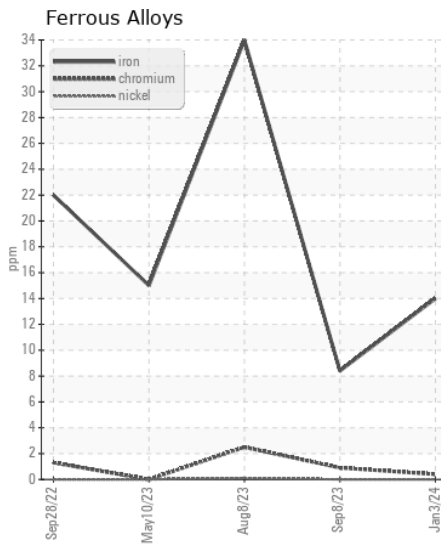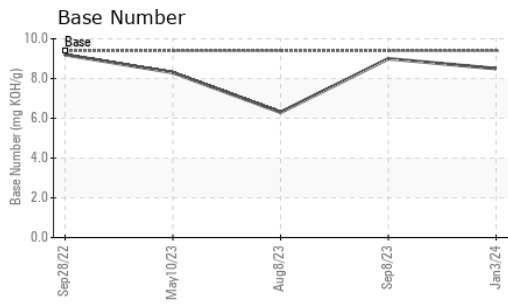

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0017296 **Received** : 11 Jan 2024  
**Lab Number** : 06057803 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829185 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**RTL PACLEASE - 7051 -Las Vegas**  
 4150 Arctic Spring Ave  
 North Las Vegas, NV  
 US 89115  
 Contact: Rudy Trevizo  
 TrevizoR@RushEnterprises.Com  
 T: (702)208-7164  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)