



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**830024**  
 Component  
**2 Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (25 QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0101778</b>	PCA0095832	PCA0077346
Sample Date		Client Info		<b>09 Jan 2024</b>	28 Aug 2023	13 Mar 2023
Machine Age	hrs	Client Info		<b>7474</b>	6435	5325
Oil Age	hrs	Client Info		<b>1039</b>	1110	1144
Filter Age	hrs	Client Info		<b>1039</b>	1110	1144
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>17</b>	16	13
Chromium	ppm	ASTM D5185m	>4	<b>3</b>	3	3
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>4</b>	4	3
Lead	ppm	ASTM D5185m	>30	<b>1</b>	4	4
Copper	ppm	ASTM D5185m	>35	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>4	<b>1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	<b>6</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.0</b>	11.4	10.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	24.5	23.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	7	4
Boron	ppm	ASTM D5185m	50	<b>8</b>	3	8
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	50	<b>52</b>	51	49
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	560	<b>585</b>	565	538
Calcium	ppm	ASTM D5185m	1510	<b>1605</b>	1665	1535
Phosphorus	ppm	ASTM D5185m	780	<b>790</b>	736	680
Zinc	ppm	ASTM D5185m	870	<b>1027</b>	994	944
Sulfur	ppm	ASTM D5185m	2040	<b>2495</b>	2909	3004
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.1</b>	19.9	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>5.7</b>	3.0	4.2
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.6</b>	14.5	14.4

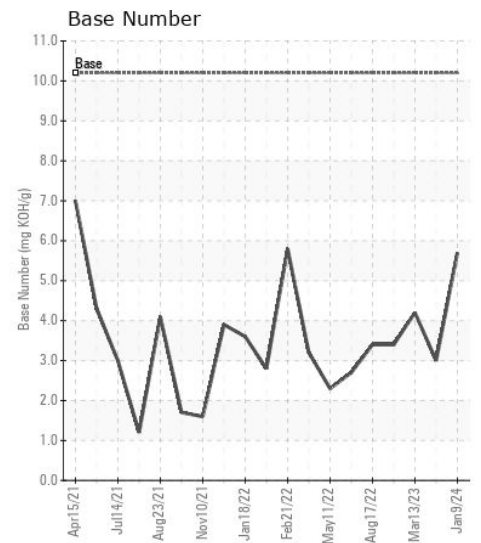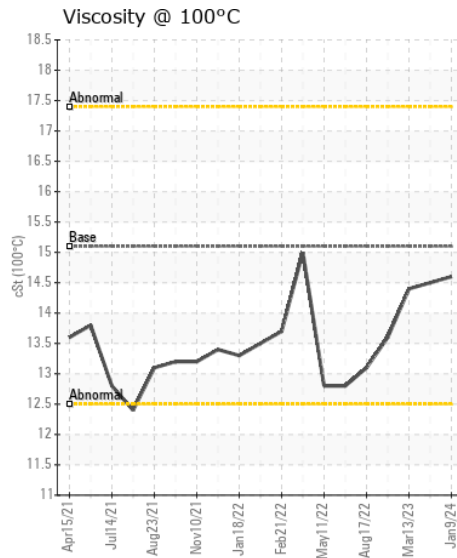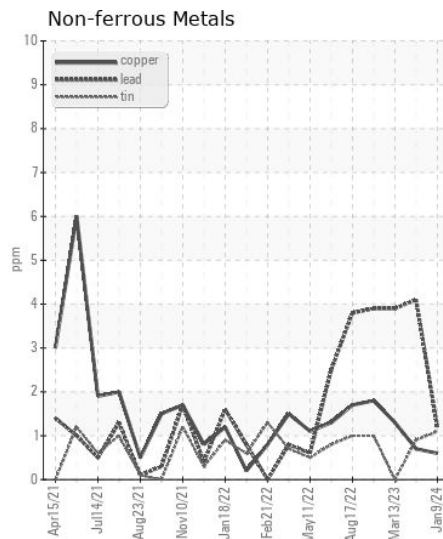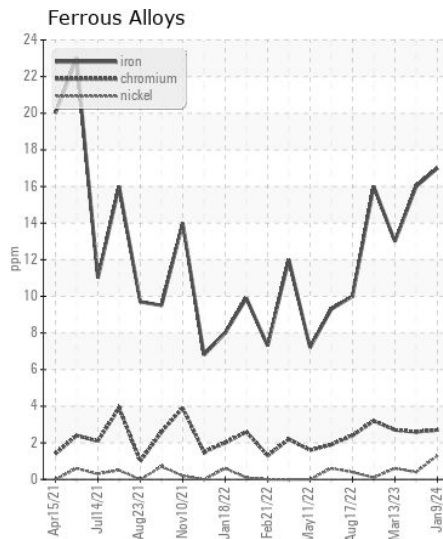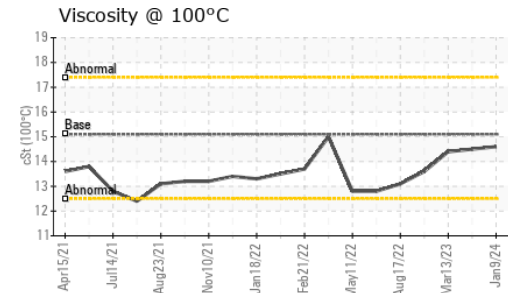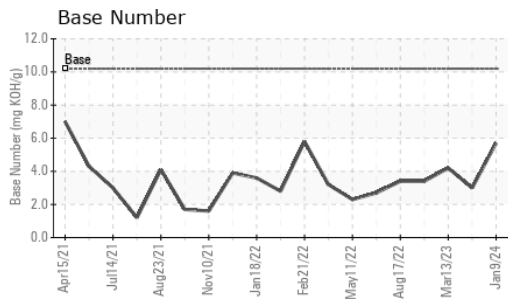

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101778 **Received** : 11 Jan 2024  
**Lab Number** : 06057867 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829249 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 002 - Vance-Granville**  
 241 Vanco Mill Rd  
 Henderson, NC  
 US 27537  
 Contact: Cameron King  
 cameron.king@gflenv.com  
 T: (252)438-5333  
 F: (252)431-1635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)