



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>



Area  
**(YA111541)**  
Machine Id  
**2470**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0101781</b>	PCA0101731	PCA0077299
Sample Date		Client Info		<b>09 Jan 2024</b>	05 Sep 2023	27 Jun 2023
Machine Age	hrs	Client Info		<b>24147</b>	23553	23039
Oil Age	hrs	Client Info		<b>785</b>	785	785
Filter Age	hrs	Client Info		<b>785</b>	785	785
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	ATTENTION	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>4</b>	5	4
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	0	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>7</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Fuel	%	ASTM D3524	>3.0	<b>▲ 4.8</b>	0.5	<b>▲ 3.8</b>
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	6.8	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.5</b>	16.8	18.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		<b>19</b>	3	<1
Boron	ppm	ASTM D5185m	0	<b>5</b>	10	12
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>63</b>	70	64
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>776</b>	874	844
Calcium	ppm	ASTM D5185m	1070	<b>1017</b>	1272	1116
Phosphorus	ppm	ASTM D5185m	1150	<b>895</b>	970	967
Zinc	ppm	ASTM D5185m	1270	<b>1100</b>	1188	1183
Sulfur	ppm	ASTM D5185m	2060	<b>2743</b>	3516	3562
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.1</b>	12.4	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.0</b>	7.5	7.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>▲ 11.4</b>	▲ 11.8	▲ 12.0

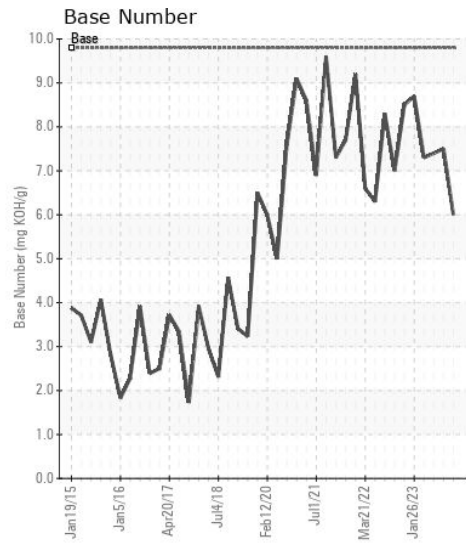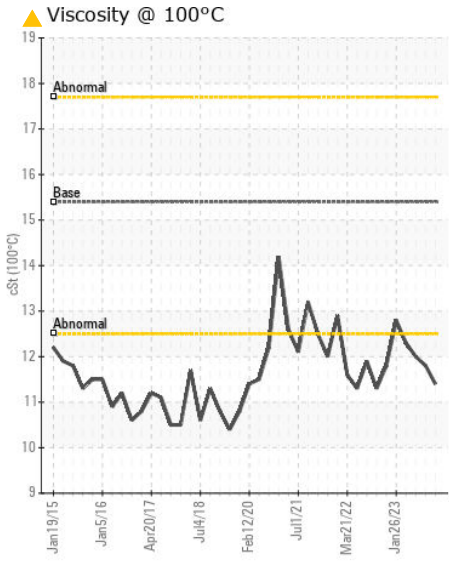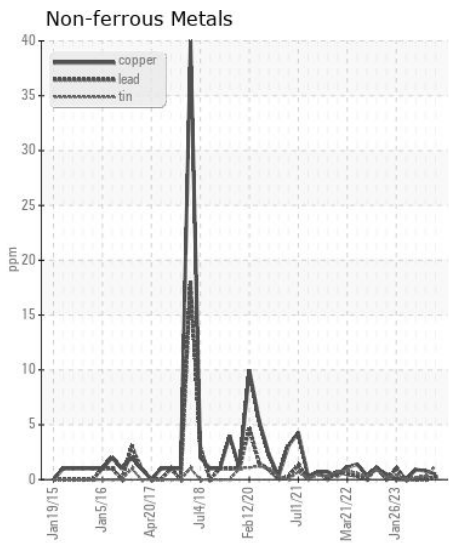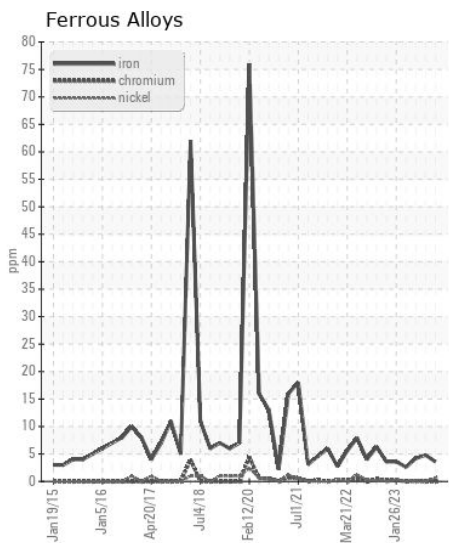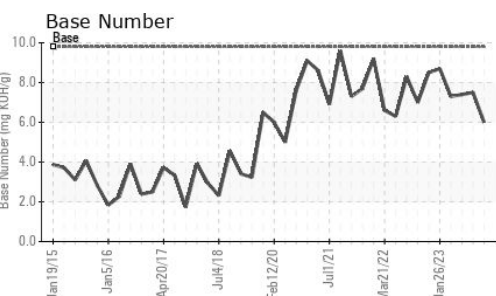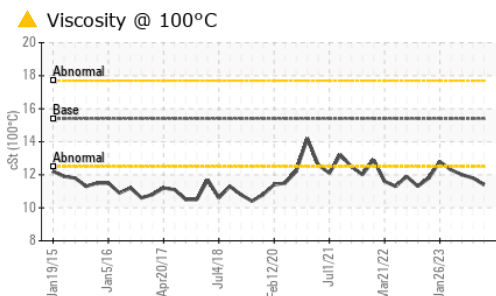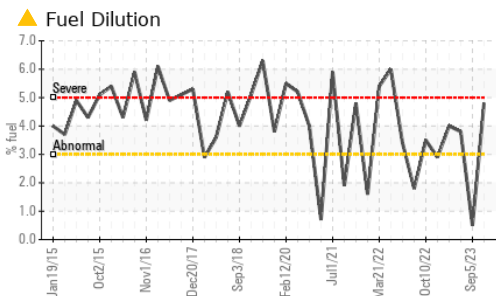

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101781 **Received** : 11 Jan 2024  
**Lab Number** : 06057869 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10829251 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 002 - Vance-Granville**  
 241 Vanco Mill Rd  
 Henderson, NC  
 US 27537  
 Contact: Cameron King  
 cameron.king@gflenv.com  
 T: (252)438-5333  
 F: (252)431-1635

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)