



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
713003
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0104029 | GFL0091196 | GFL0080073 |
| Sample Date | | Client Info | | 05 Jan 2024 | 20 Sep 2023 | 21 Apr 2023 |
| Machine Age | hrs | Client Info | | 19851 | 1417 | 392 |
| Oil Age | hrs | Client Info | | 2238 | 1417 | 0 |
| Filter Age | hrs | Client Info | | 650 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | ABNORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >120 | 4 | 8 | 22 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | <1 | <1 | 5 |
| Titanium | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | <1 | 1 |
| Aluminum | ppm | ASTM D5185m | >20 | 4 | 0 | 5 |
| Lead | ppm | ASTM D5185m | >40 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 3 | 156 | 128 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | 2 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 5 | 7 | ▲ 82 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 7 | 12 |
| Fuel | | WC Method | >3.0 | <1.0 | <1.0 | 0.3 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >4 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.8 | 7.7 | 8.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.1 | 20.1 | 23.3 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|-------|
| Sodium | ppm | ASTM D5185m | | 0 | 3 | 4 |
| Boron | ppm | ASTM D5185m | 0 | 27 | 9 | 294 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185m | 60 | 82 | 66 | 115 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | 4 |
| Magnesium | ppm | ASTM D5185m | 1010 | 161 | 897 | 690 |
| Calcium | ppm | ASTM D5185m | 1070 | 1988 | 1178 | 1396 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 993 | 986 | 713 |
| Zinc | ppm | ASTM D5185m | 1270 | 1259 | 1227 | 866 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3437 | 3292 | 2874 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.3 | 16.9 | 21.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 5.3 | 6.7 | 7.3 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 14.2 | 12.8 | ▲ 9.8 |

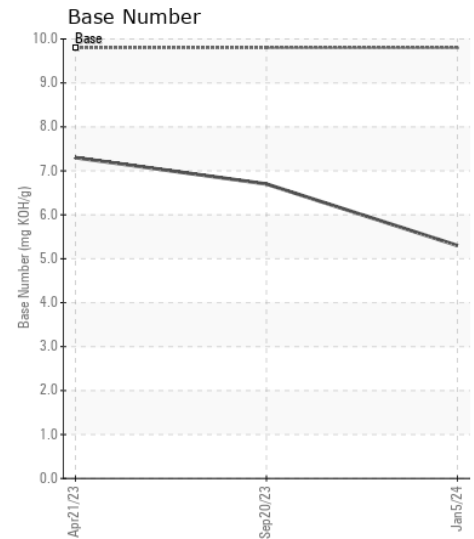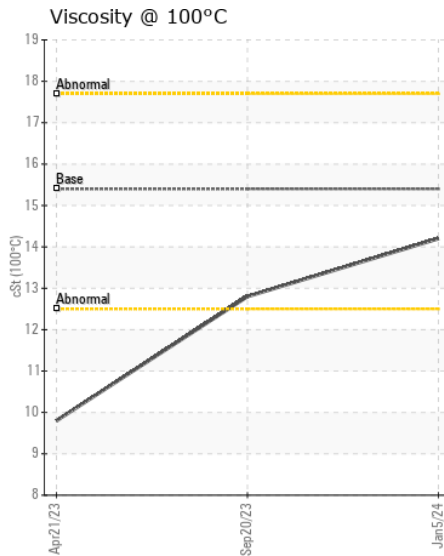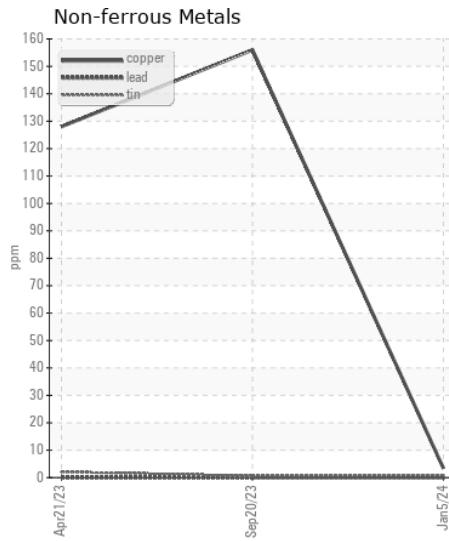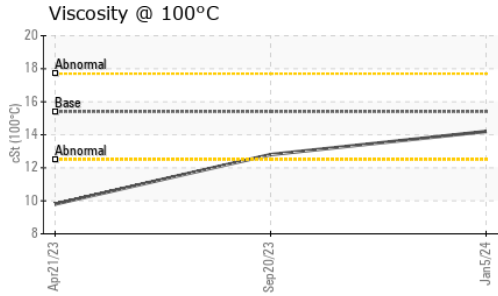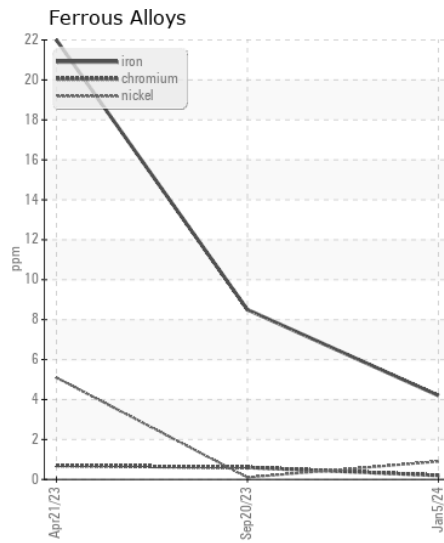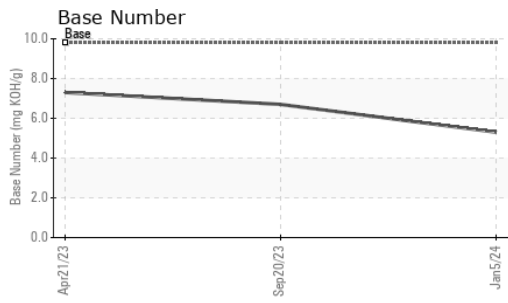

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0104029 **Received** : 11 Jan 2024
Lab Number : 06057885 **Diagnosed** : 12 Jan 2024
Unique Number : 10829267 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 015 - Columbia
 7800 Farrow Road
 Columbia, SC
 US 29203-3219
 Contact: NOEL MATTHEWS
 nmatthewsjr@gflenv.com
 T: (803)935-0249
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)