



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
{UNASSIGNED}

Machine Id
913025

Component
Front Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (40 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0098974	GFL0099002	GFL0098954
Sample Date		Client Info		28 Dec 2023	07 Dec 2023	21 Nov 2023
Machine Age	hrs	Client Info		3166	3004	2861
Oil Age	hrs	Client Info		2410	2410	2410
Filter Age	hrs	Client Info		174	174	174
Oil Changed		Client Info		N/A	Diff Oil	Not Changd
Filter Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	5	23	18
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	2	5	4
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	4
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	<1	6	4
Tin	ppm	ASTM D5185m	>15	<1	1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	5	7
Potassium	ppm	ASTM D5185m	>20	0	14	10
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.2	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	6.0	8.9	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	20.0	19.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	12	0
Molybdenum	ppm	ASTM D5185m	60	54	60	62
Manganese	ppm	ASTM D5185m	0	<1	<1	0
Magnesium	ppm	ASTM D5185m	1010	915	931	969
Calcium	ppm	ASTM D5185m	1070	997	1063	1099
Phosphorus	ppm	ASTM D5185m	1150	987	957	986
Zinc	ppm	ASTM D5185m	1270	1231	1205	1264
Sulfur	ppm	ASTM D5185m	2060	3012	2895	2835
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	15.7	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.3	6.9	7.7
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.4	13.6

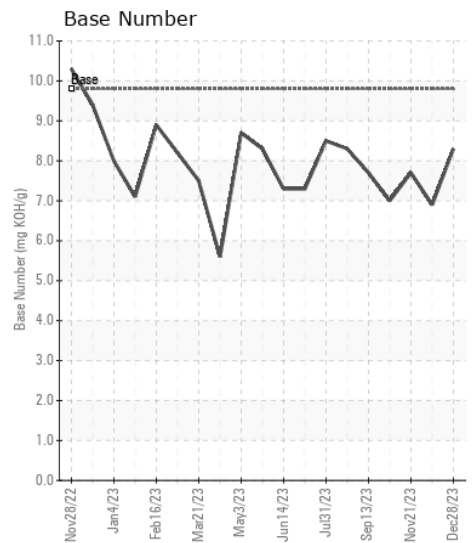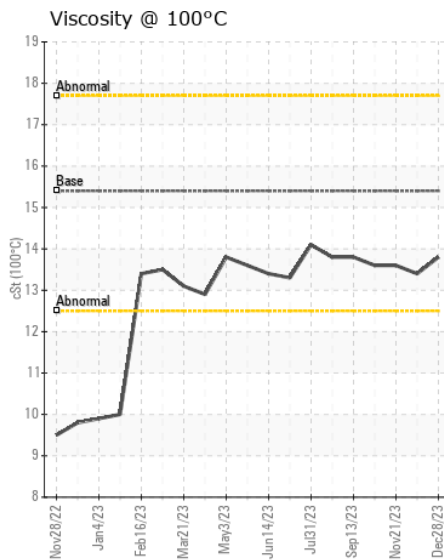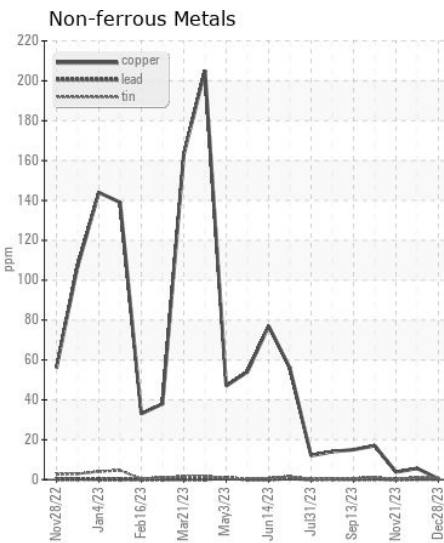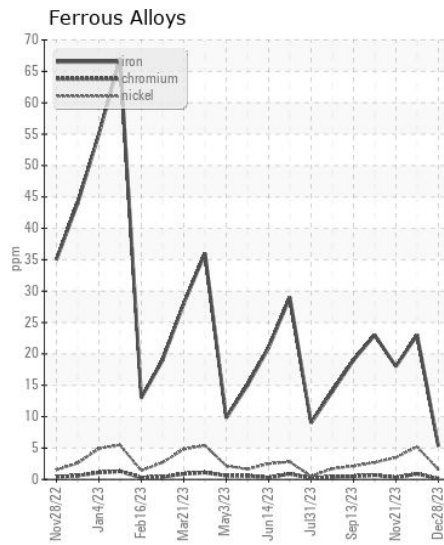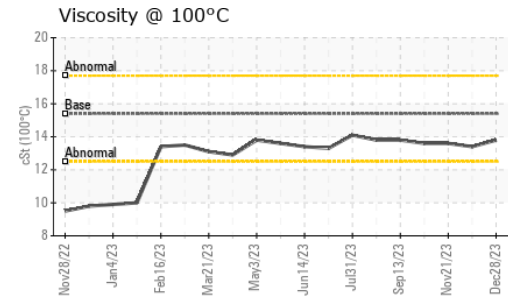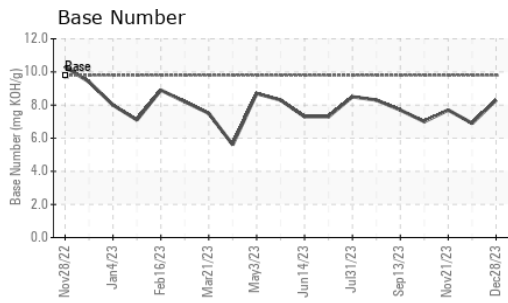

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098974 **Received** : 11 Jan 2024
Lab Number : 06057887 **Diagnosed** : 12 Jan 2024
Unique Number : 10829269 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 084 - Clarksville
 699 Jack Miller Boulevard
 Clarksville, TN
 US 37042
 Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com
 T: (931)552-7276
 F: (931)572-9674

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)