



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 3038E 1LV3038EHKK129394

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0189669 | JR0135410 | JR0093491 |
| Sample Date | | Client Info | | 28 Dec 2023 | 21 Dec 2022 | 30 Dec 2021 |
| Machine Age | hrs | Client Info | | 89 | 66 | 53 |
| Oil Age | hrs | Client Info | | 0 | 13 | 0 |
| Filter Age | hrs | Client Info | | 0 | 13 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | N/A | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

Metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >51 | 4 | 4 | 6 |
| Chromium | ppm | ASTM D5185m | >11 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >31 | 5 | 2 | <1 |
| Lead | ppm | ASTM D5185m | >26 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >26 | 3 | 5 | 8 |
| Tin | ppm | ASTM D5185m | >4 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >22 | 15 | 10 | 16 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 1 | 2 |
| Fuel | | WC Method | >2.1 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.21 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.1 | 0.1 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.3 | 6.4 | 6.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.3 | 20.4 | 20.1 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >31 | 0 | 2 | 3 |
| Boron | ppm | ASTM D5185m | | 247 | 252 | 260 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 1 |
| Molybdenum | ppm | ASTM D5185m | | 228 | 242 | 244 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 781 | 712 | 781 |
| Calcium | ppm | ASTM D5185m | | 1278 | 1368 | 1383 |
| Phosphorus | ppm | ASTM D5185m | | 870 | 831 | 847 |
| Zinc | ppm | ASTM D5185m | | 1060 | 990 | 973 |
| Sulfur | ppm | ASTM D5185m | | 2978 | 3485 | 2604 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.7 | 15.2 | 15.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 10.1 | 10.3 | 10.9 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.7 | 13.9 | 13.7 |

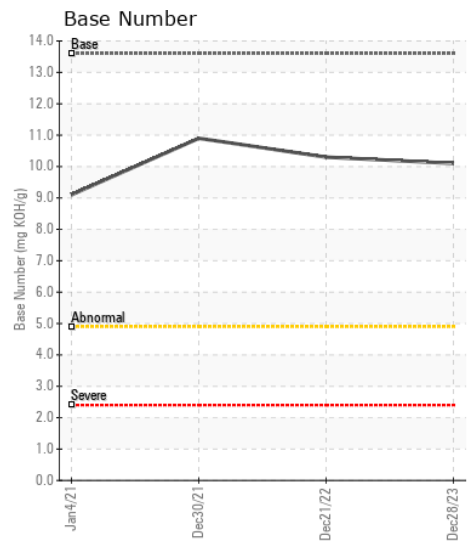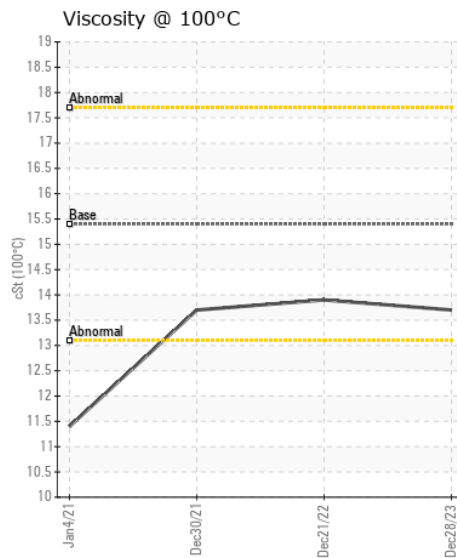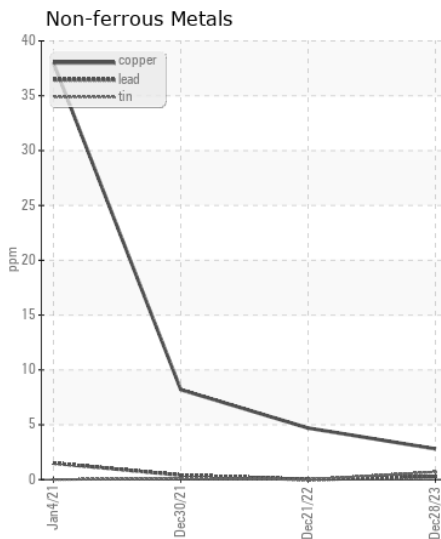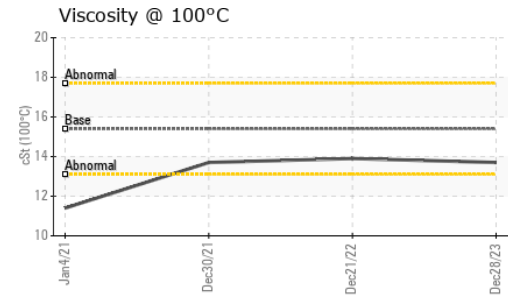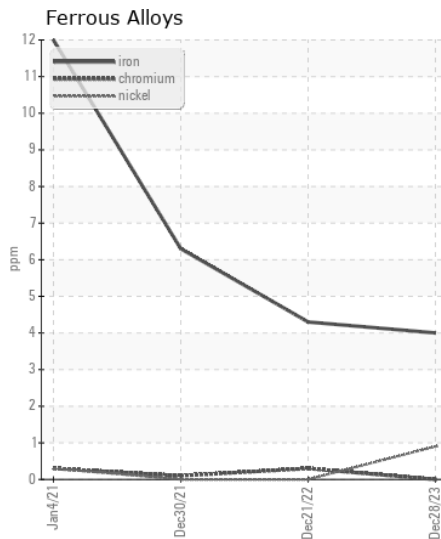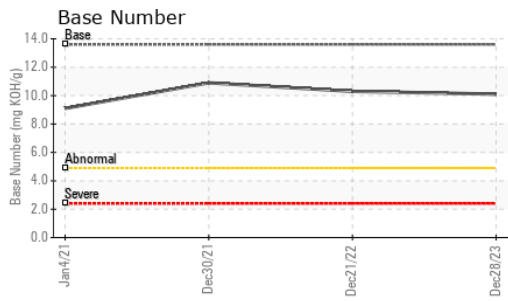

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189669 **Received** : 11 Jan 2024
Lab Number : 06057932 **Diagnosed** : 12 Jan 2024
Unique Number : 10829314 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - LA CROSSE
 38431 HWY 58
 LA CROSSE, VA
 US 23950-1807
 Contact: HUNTER GREEN
 hgreen@jamesriverequipment.com
 T: (434)447-4325
 F: (434)447-1329