



| | |
|-----------------|-----------------|
| WEAR | ABNORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 700L 1T0700LXTPF450323

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JR0194464 | --- | --- |
| Sample Date | | Client Info | | 10 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 567 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >51 | 23 | --- | --- |
| Chromium | ppm | ASTM D5185m | >11 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | 2 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >31 | 5 | --- | --- |
| Lead | ppm | ASTM D5185m | >26 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >26 | ▲ 424 | --- | --- |
| Tin | ppm | ASTM D5185m | >4 | 2 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >22 | 9 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Fuel | % | ASTM D3524 | >2.1 | 0.4 | --- | --- |
| Water | | WC Method | >0.21 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.3 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.0 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.8 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|-----|-------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >31 | 1 | --- | --- |
| Boron | ppm | ASTM D5185m | | 212 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 236 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 829 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 1369 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 890 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1120 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 2894 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.0 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 8.8 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | | 10.3 | --- | --- |

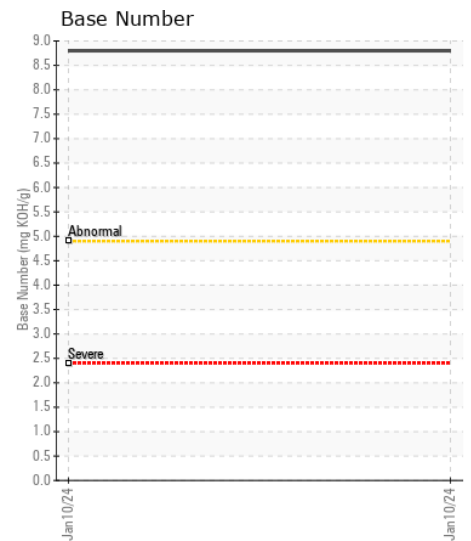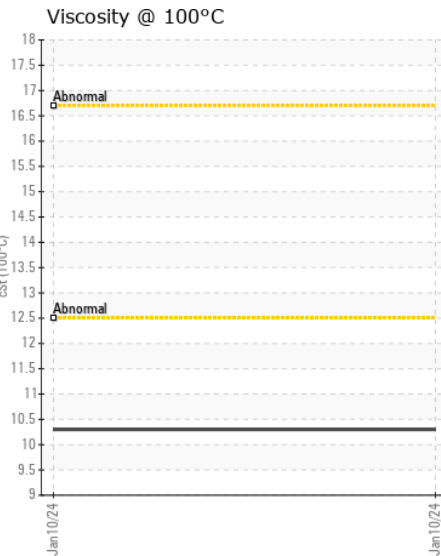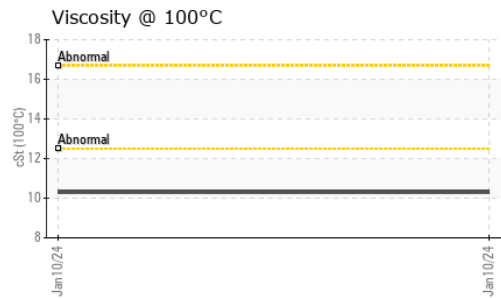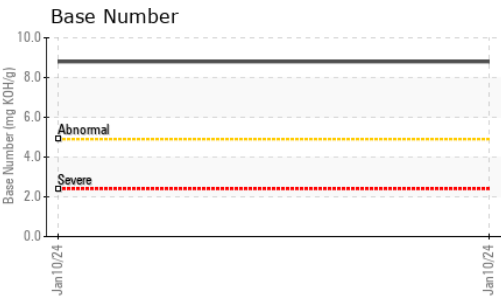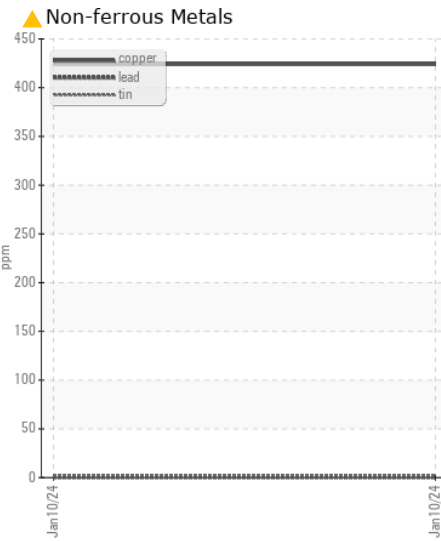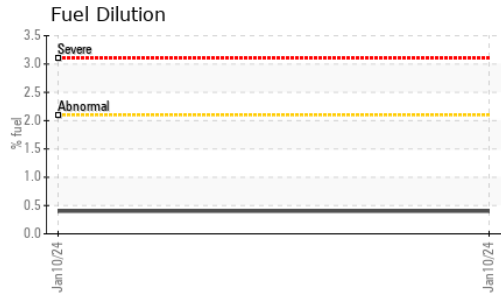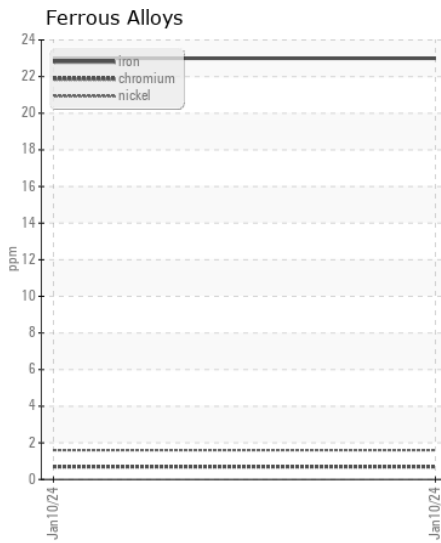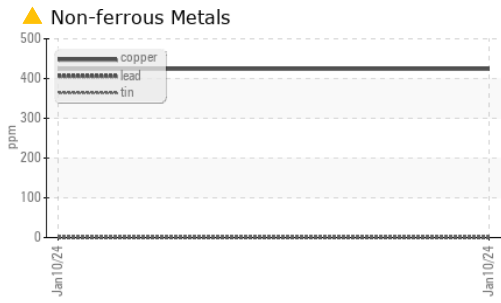

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0194464 **Received** : 11 Jan 2024
Lab Number : 06057938 **Diagnosed** : 15 Jan 2024
Unique Number : 10829320 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409

Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556