



WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 3025E 1LV3025ETHHH104018

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0189702	---	---
Sample Date		Client Info		12 Dec 2023	---	---
Machine Age	hrs	Client Info		206	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

The iron level is abnormal. All other component wear rates are normal.

PQ		ASTM D8184		16	---	---
Iron	ppm	ASTM D5185m	>20	▲ 44	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	3	---	---
Copper	ppm	ASTM D5185m	>75	63	---	---
Tin	ppm	ASTM D5185m	>10	5	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Moderate concentration of visible dirt/debris present in the oil.


Silicon	ppm	ASTM D5185m	>20	10	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION


The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		91	---	---
Calcium	ppm	ASTM D5185m		3269	---	---
Phosphorus	ppm	ASTM D5185m		1025	---	---
Zinc	ppm	ASTM D5185m		1213	---	---
Sulfur	ppm	ASTM D5185m		4142	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.00	---	---
Visc @ 40°C	cSt	ASTM D445		29.5	---	---


▲ Ferrous Alloys

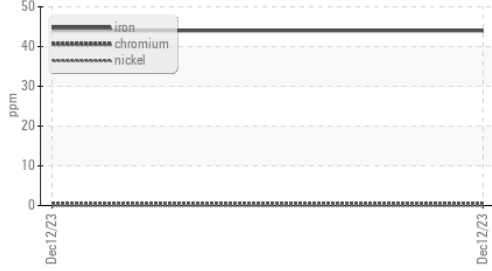


Acid Number

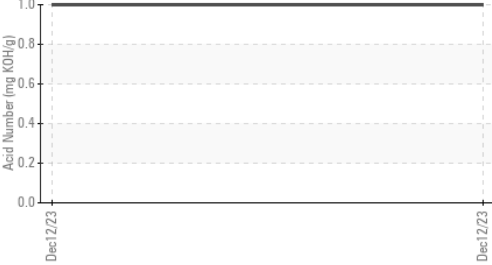


Viscosity @ 40°C

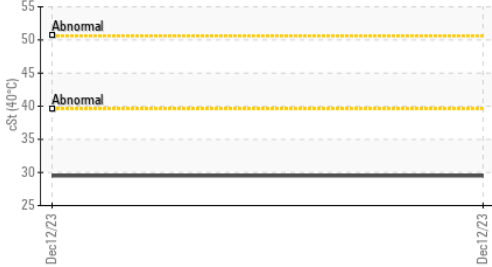


PQ

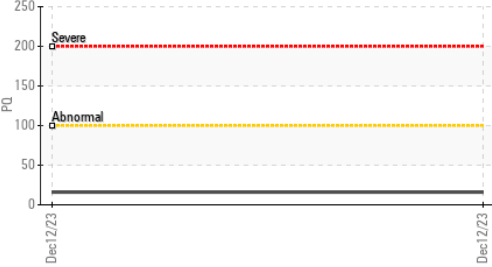


▲ Ferrous Alloys

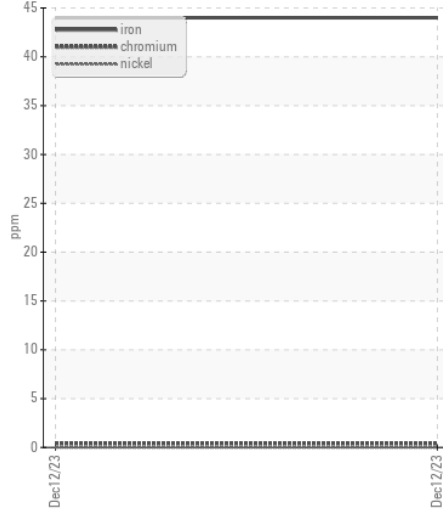


Non-ferrous Metals

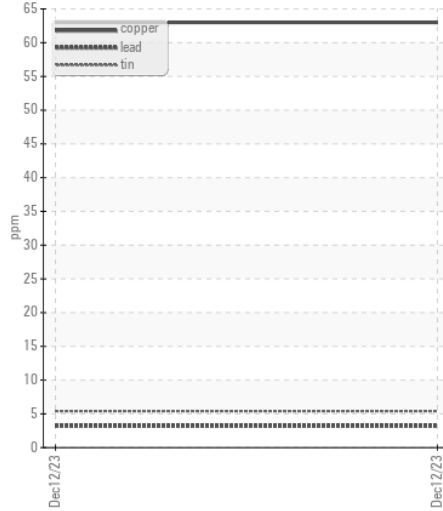

Viscosity @ 40°C

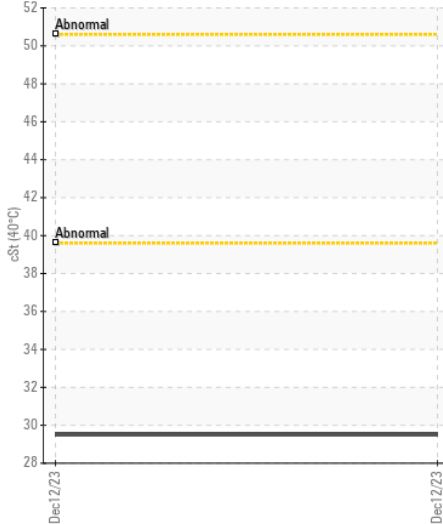

Acid Number

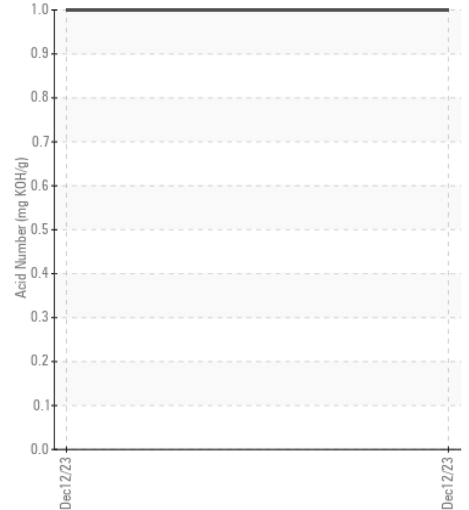

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189702 **Received** : 11 Jan 2024
Lab Number : 06057994 **Diagnosed** : 12 Jan 2024
Unique Number : 10829376 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - LA CROSSE
 38431 HWY 58
 LA CROSSE, VA
 US 23950-1807

Contact: HUNTER GREEN
 hgreen@jamesriverequipment.com
 T: (434)447-4325
 F: (434)447-1329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)