



OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Heavy Equipment-Excavator 40t+/No Dealer Given**

Machine Id  
**104006 KOMATSU PC400LC-7E0 A87437**

Component  
**Left Final Drive**

Fluid  
**{not provided} (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0039801	---	---
Sample Date		Client Info		05 Jan 2024	---	---
Machine Age	hrs	Client Info		14015	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184		154	---	---
Iron	ppm	ASTM D5185m	>500	115	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	7	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	56	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		4	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		5	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		34	---	---
Calcium	ppm	ASTM D5185m		3583	---	---
Phosphorus	ppm	ASTM D5185m		807	---	---
Zinc	ppm	ASTM D5185m		1008	---	---
Sulfur	ppm	ASTM D5185m		5620	---	---
Visc @ 40°C	cSt	ASTM D445		88.1	---	---

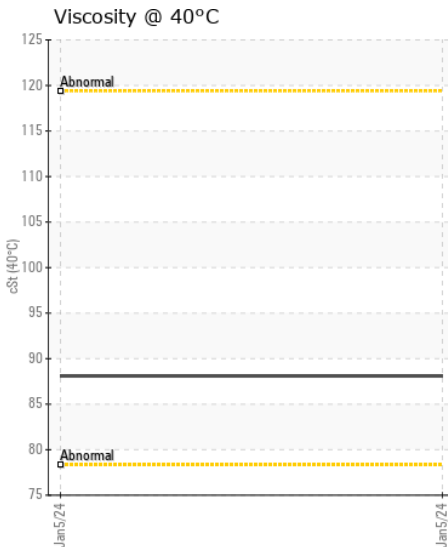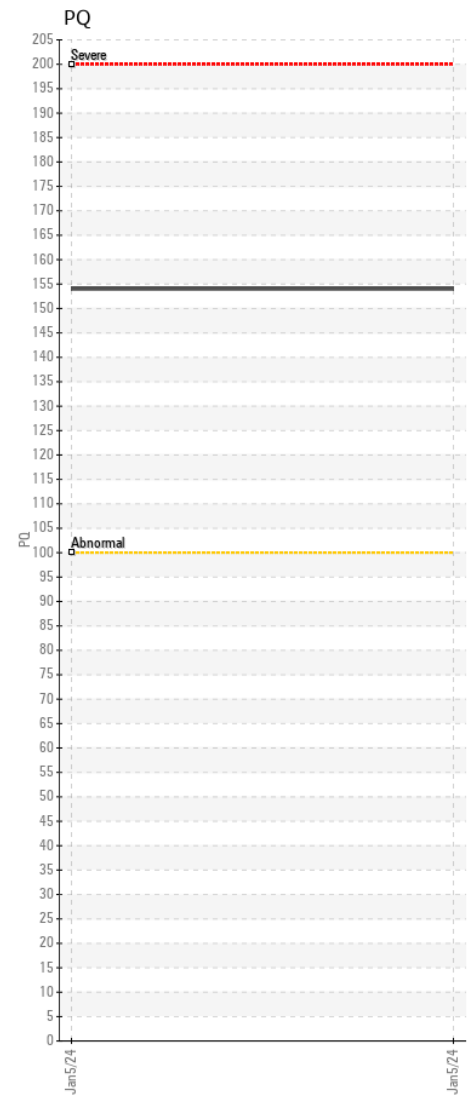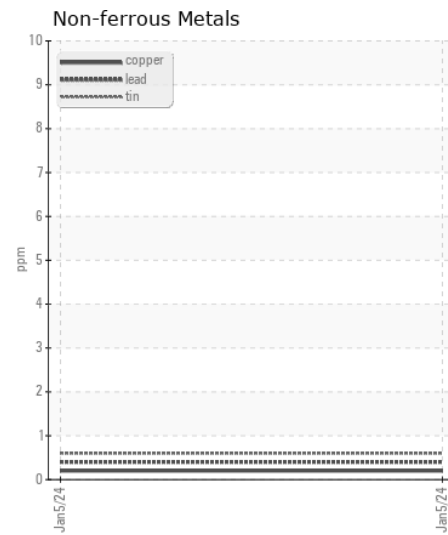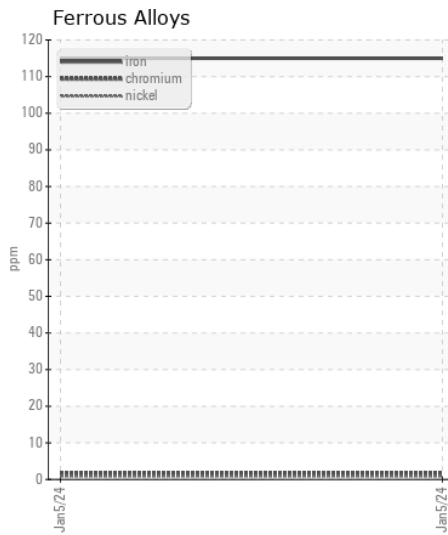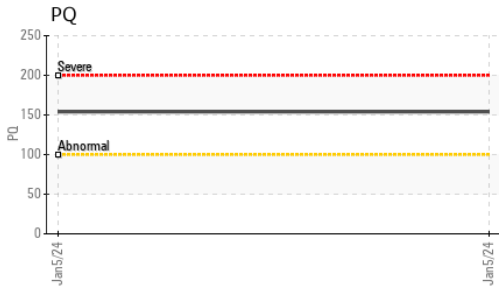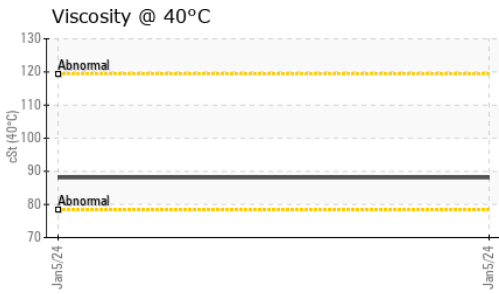

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0039801 **Received** : 11 Jan 2024  
**Lab Number** : 06058374 **Diagnosed** : 14 Jan 2024  
**Unique Number** : 10829756 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MIDWEST MOLE**  
 6814 W 350N  
 GREENFIELD, IN  
 US 46140  
 Contact: C.W. Kick  
 CKICK@MIDWESTMOLE.COM  
 T: (317)545-1335  
 F: