



OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ABNORMAL
SEVERE
NORMAL

Area
Heavy Equipment-Excavator 40t+/No Dealer Given

Machine Id
104009 KOMATSU PC400LC-7 A86691

Component
Rear Right Final Drive

Fluid
{not provided} (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0039795	---	---
Sample Date		Client Info		09 Jan 2024	---	---
Machine Age	hrs	Client Info		7303	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---

WEAR

Gear wear is indicated. Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		323	---	---
Iron	ppm	ASTM D5185m	>500	▲ 530	---	---
Chromium	ppm	ASTM D5185m	>10	▲ 11	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		4	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	▲ 74	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	▲ 64	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	◆ 321	---	---
Potassium	ppm	ASTM D5185m	>20	25	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		43	---	---
Calcium	ppm	ASTM D5185m		3768	---	---
Phosphorus	ppm	ASTM D5185m		821	---	---
Zinc	ppm	ASTM D5185m		1049	---	---
Sulfur	ppm	ASTM D5185m		6006	---	---
Visc @ 40°C	cSt	ASTM D445		87.9	---	---

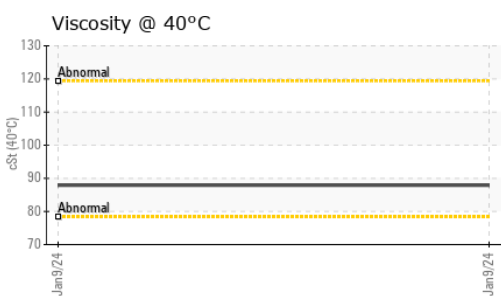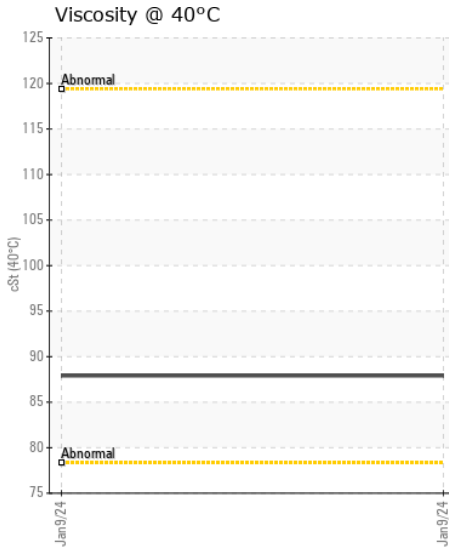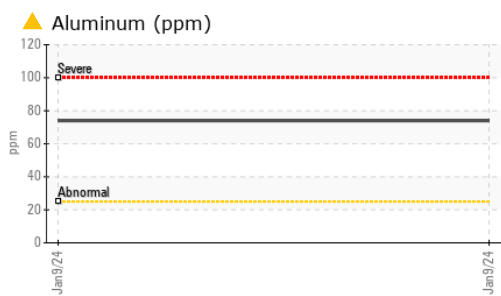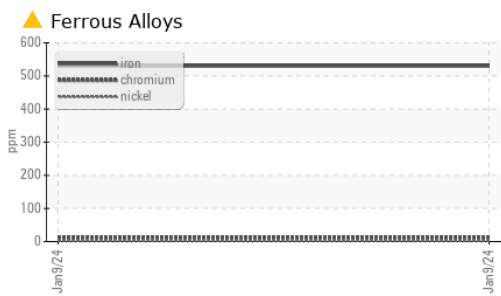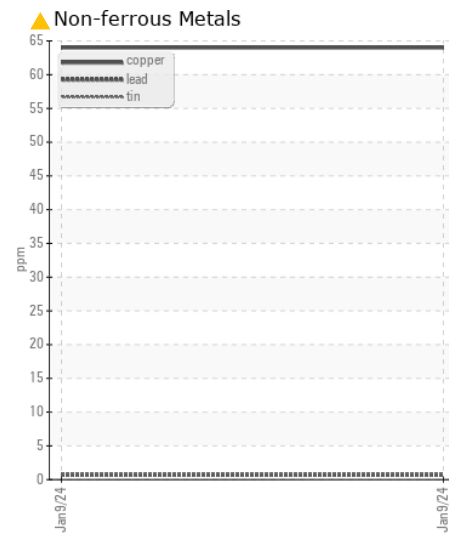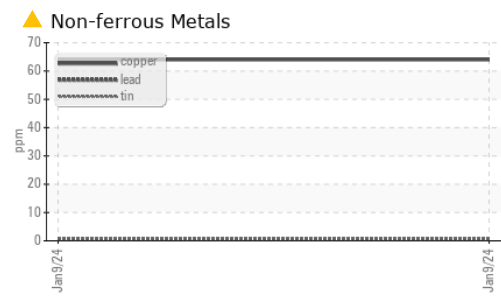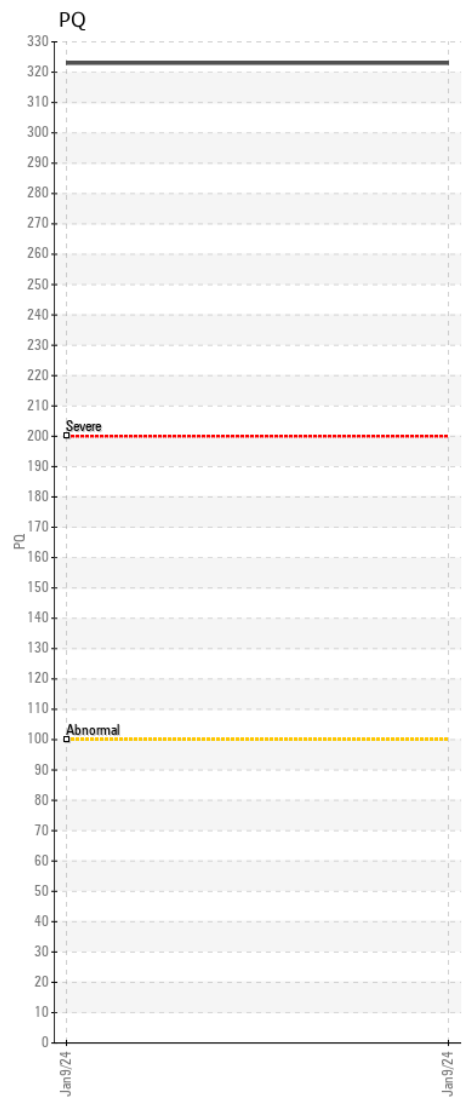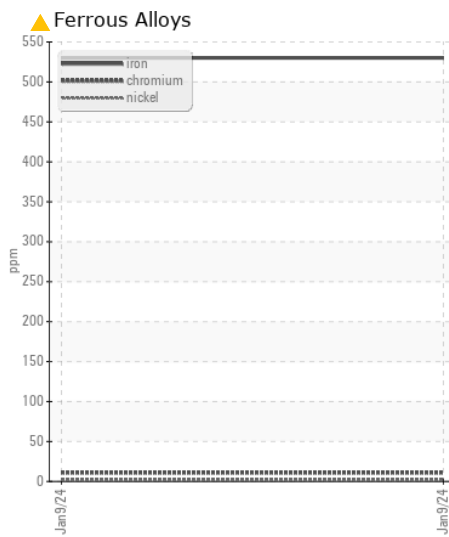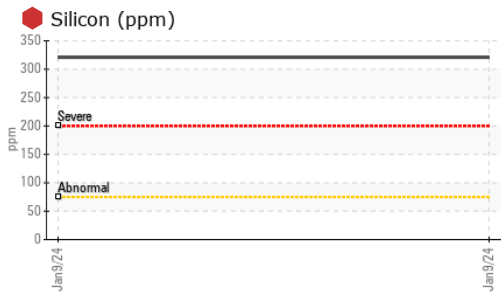

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0039795 **Received** : 11 Jan 2024
Lab Number : 06058376 **Diagnosed** : 14 Jan 2024
Unique Number : 10829758 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MIDWEST MOLE
 6814 W 350N
 GREENFIELD, IN
 US 46140
 Contact: C.W. Kick
 CKICK@MIDWESTMOLE.COM
 T: (317)545-1335
 F: