



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWA449827 THREE LAKE]
Machine Id
VOLVO EC550 310248
Component
Swing Drive
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP438142	---	---
Sample Date		Client Info		04 Jan 2024	---	---
Machine Age	hrs	Client Info		708	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>1200	278	---	---
Chromium	ppm	ASTM D5185m	>10	5	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>50	73	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	23	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.25	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.25	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	111	0	---	---
Barium	ppm	ASTM D5185m	0.0	<1	---	---
Molybdenum	ppm	ASTM D5185m	0.9	0	---	---
Manganese	ppm	ASTM D5185m	0.0	8	---	---
Magnesium	ppm	ASTM D5185m	39	1	---	---
Calcium	ppm	ASTM D5185m	93	10	---	---
Phosphorus	ppm	ASTM D5185m	920	324	---	---
Zinc	ppm	ASTM D5185m	104	54	---	---
Sulfur	ppm	ASTM D5185m	20179	15056	---	---
Visc @ 40°C	cSt	ASTM D445	333	173	---	---

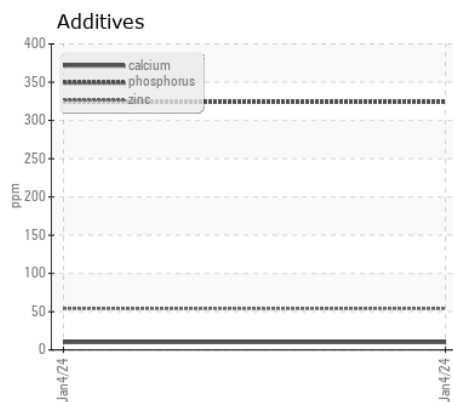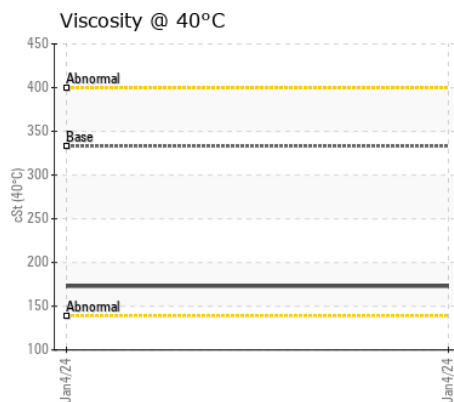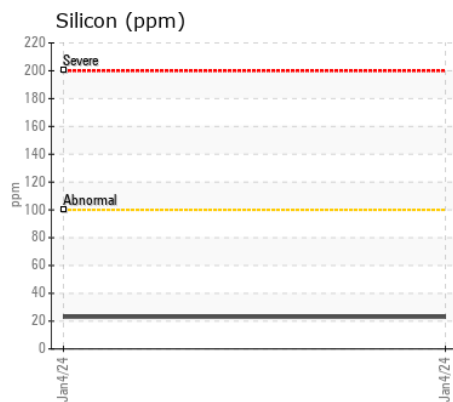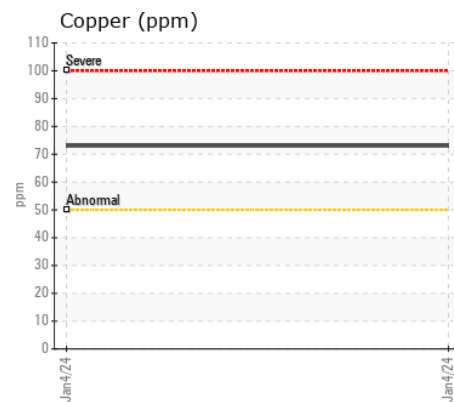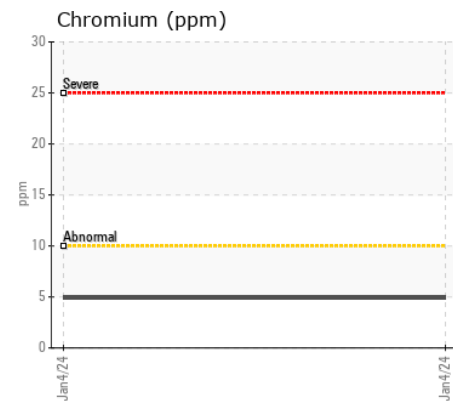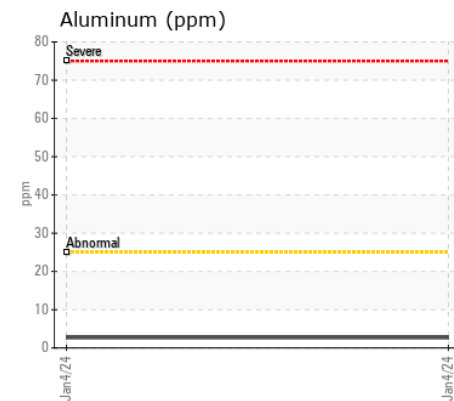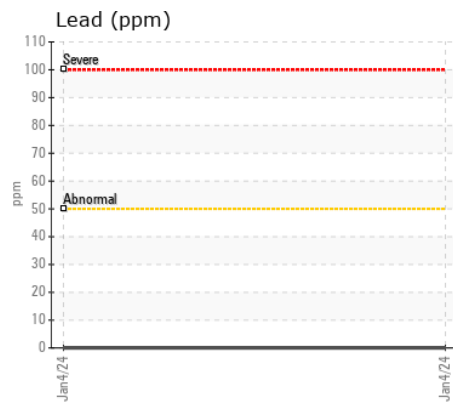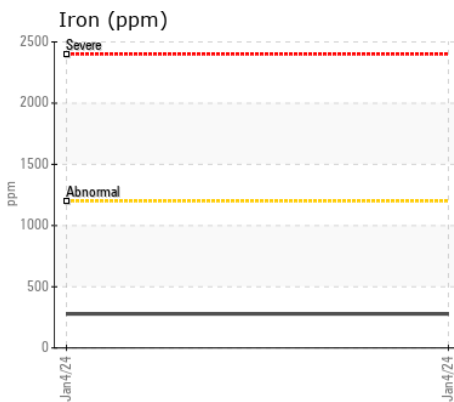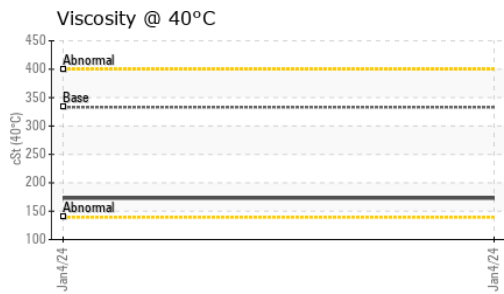

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP438142 **Received** : 11 Jan 2024
Lab Number : 06058407 **Diagnosed** : 14 Jan 2024
Unique Number : 10829789 **Diagnostician** : Don Baldrige
Test Package : MOB 1

ALTA EQUIPMENT COMPANY
 5210 REESE ROAD
 DAVIE, FL
 US 33314
 Contact: N. FACEY
 nfacey@altaequipfl.com
 T: (954)581-4744
 F: (954)583-0318

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)