



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 353449
Component
2 Axle
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0006307	---	---
Sample Date		Client Info		04 Jan 2024	---	---
Machine Age	hrs	Client Info		1406	---	---
Oil Age	hrs	Client Info		1406	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	252	---	---
Chromium	ppm	ASTM D5185m	>20	5	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	13	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	6	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	---	---
Boron	ppm	ASTM D5185m	400	115	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	2	---	---
Manganese	ppm	ASTM D5185m		10	---	---
Magnesium	ppm	ASTM D5185m	12	2	---	---
Calcium	ppm	ASTM D5185m	150	198	---	---
Phosphorus	ppm	ASTM D5185m	1650	1899	---	---
Zinc	ppm	ASTM D5185m	125	103	---	---
Sulfur	ppm	ASTM D5185m	22500	20394	---	---
Visc @ 40°C	cSt	ASTM D445	143	114	---	---

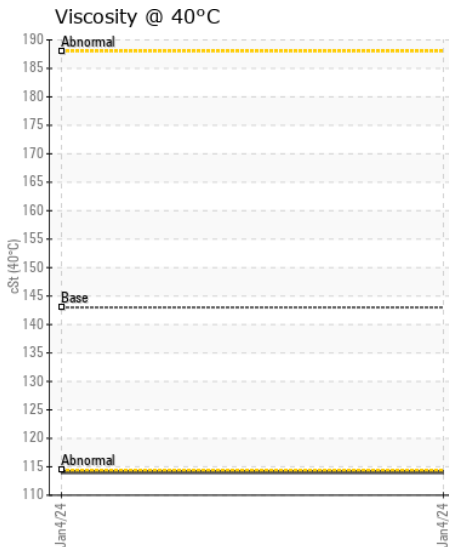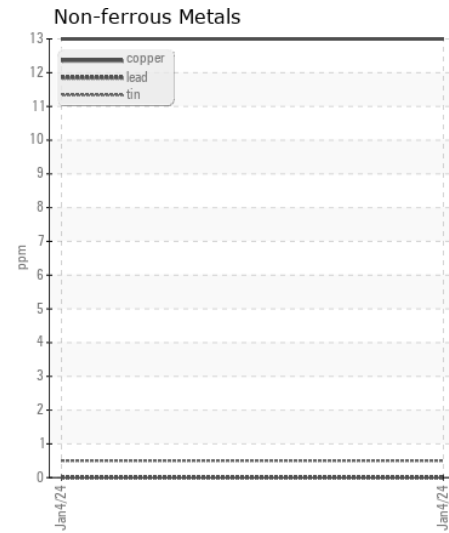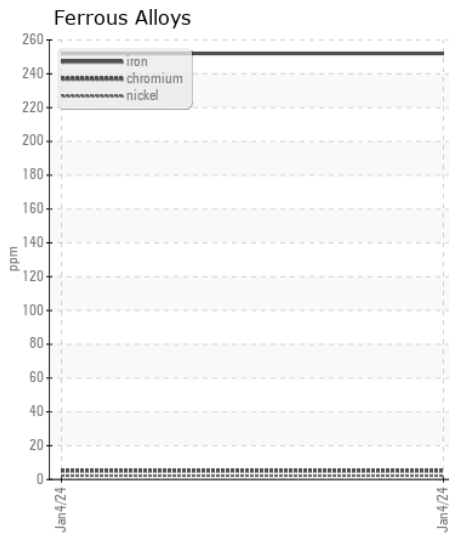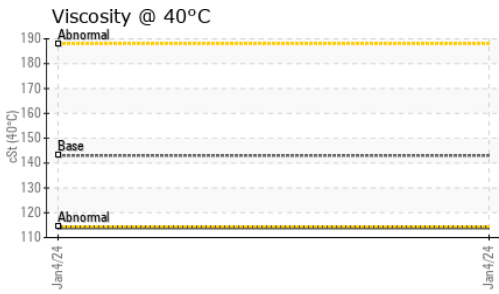

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0006307 **Recieved** : 11 Jan 2024
Lab Number : 06058444 **Diagnosed** : 12 Jan 2024
Unique Number : 10829826 **Diagnostician** : Wes Davis
Test Package : CONST

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834
 Contact: HUNTER DOLIVE
 hunter.dolive@ascendummachinery.com
 T:
 F: (704)494-8197

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)