



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**VOLVO A40G 353340**  
Component  
**Front Axle**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0006276	VCP417759	---
Sample Date		Client Info		08 Jan 2024	11 Jul 2023	---
Machine Age	hrs	Client Info		944	437	---
Oil Age	hrs	Client Info		944	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	12	203	---
Chromium	ppm	ASTM D5185m	>20	<1	3	---
Nickel	ppm	ASTM D5185m	>10	7	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>30	5	1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	1	1	---
Tin	ppm	ASTM D5185m	>20	1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<1	4	---
Potassium	ppm	ASTM D5185m	>20	15	6	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	LIGHT	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	---
Boron	ppm	ASTM D5185m		26	304	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	8	---
Manganese	ppm	ASTM D5185m		<1	8	---
Magnesium	ppm	ASTM D5185m		7	2	---
Calcium	ppm	ASTM D5185m		2	12	---
Phosphorus	ppm	ASTM D5185m		290	2375	---
Zinc	ppm	ASTM D5185m		0	7	---
Sulfur	ppm	ASTM D5185m		3922	30233	---
Visc @ 40°C	cSt	ASTM D445		51.5	51.8	---

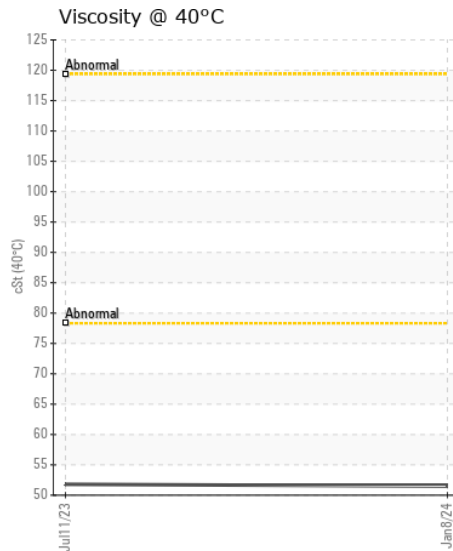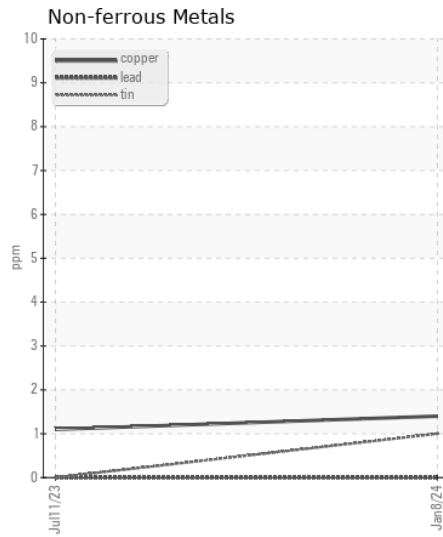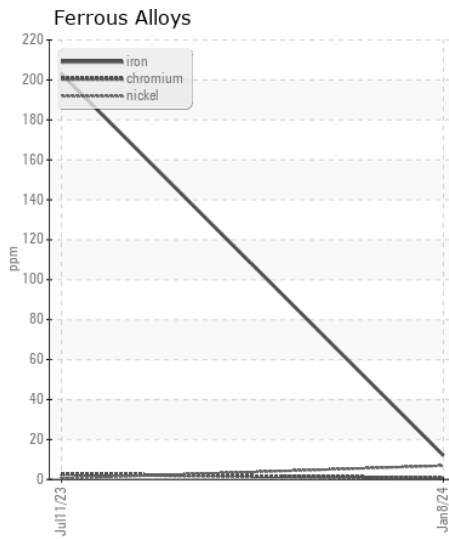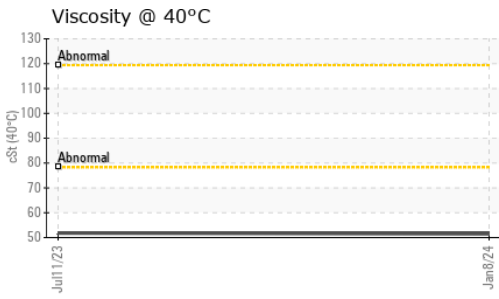

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0006276 **Received** : 11 Jan 2024  
**Lab Number** : 06058473 **Diagnosed** : 14 Jan 2024  
**Unique Number** : 10829855 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**G S MATERIALS INC**  
 PO BOX 1335  
 BURLINGTON, NC  
 US 27216

Contact: KAREN NEWPORT  
 Gsmaterials@windstream.net  
 T: (919)499-9322  
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)