



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[20019]
Machine Id
VOLVO A45G 353454
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP368260	VCP416871	---
Sample Date		Client Info		01 Nov 2023	03 Aug 2023	---
Machine Age	hrs	Client Info		3329	2143	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>160	43	63	---
Chromium	ppm	ASTM D5185m	>5	0	<1	---
Nickel	ppm	ASTM D5185m	>5	4	5	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>5	0	0	---
Aluminum	ppm	ASTM D5185m	>50	18	26	---
Lead	ppm	ASTM D5185m	>50	0	<1	---
Copper	ppm	ASTM D5185m	>225	31	45	---
Tin	ppm	ASTM D5185m	>10	4	5	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>20	7	17	---
Potassium	ppm	ASTM D5185m	>20	1	4	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185m		5	4	---
Boron	ppm	ASTM D5185m		71	79	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		2	<1	---
Manganese	ppm	ASTM D5185m		2	6	---
Magnesium	ppm	ASTM D5185m		26	4	---
Calcium	ppm	ASTM D5185m		134	88	---
Phosphorus	ppm	ASTM D5185m		242	192	---
Zinc	ppm	ASTM D5185m		35	11	---
Sulfur	ppm	ASTM D5185m		1399	1727	---
Visc @ 40°C	cSt	ASTM D445	35.0	27.8	27.3	---

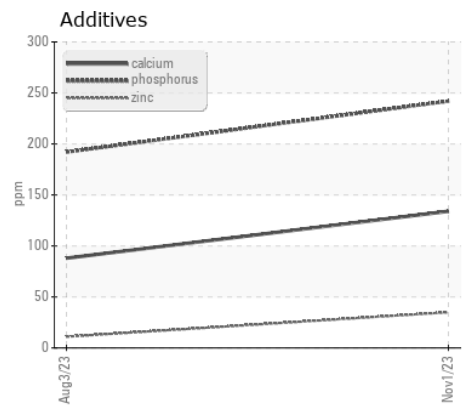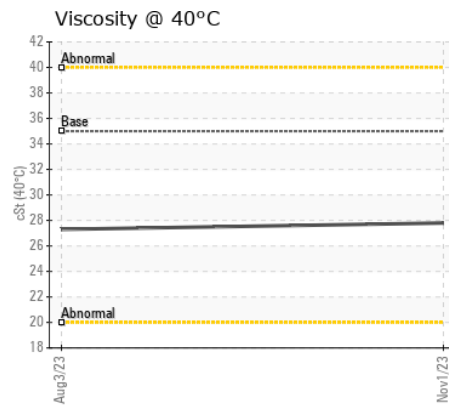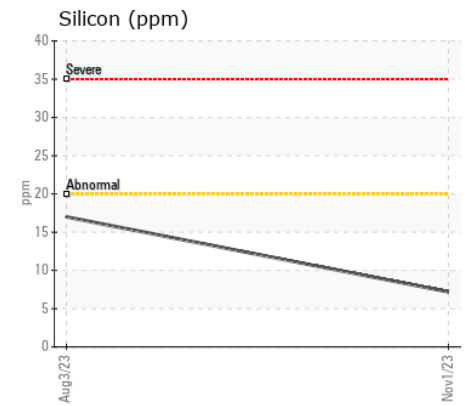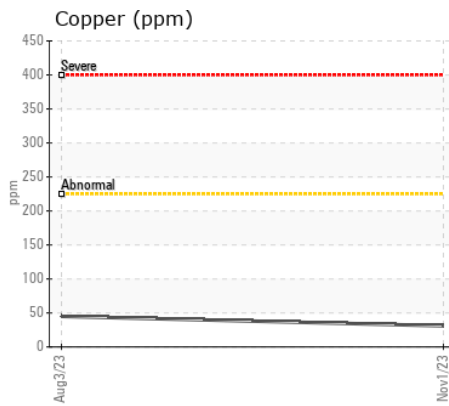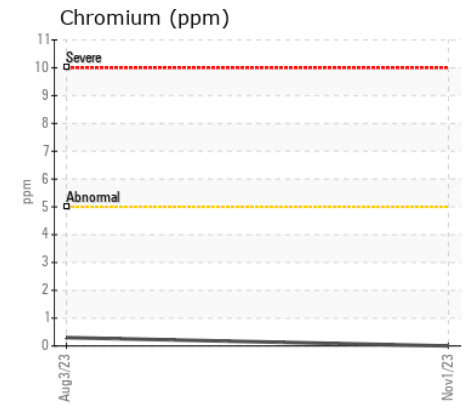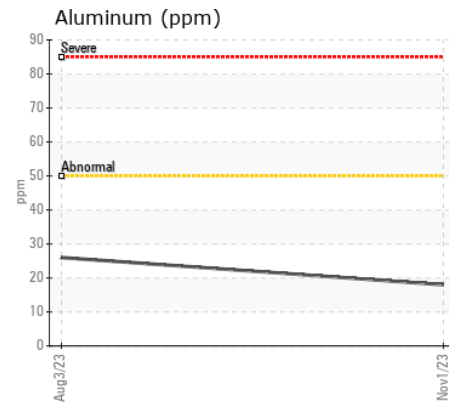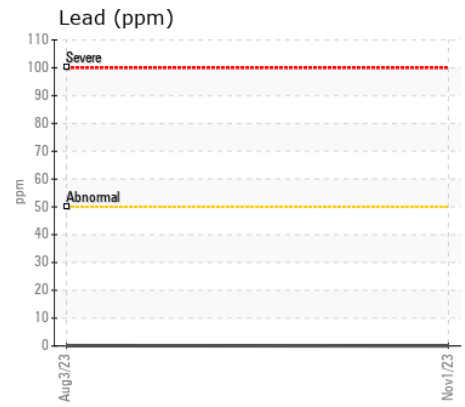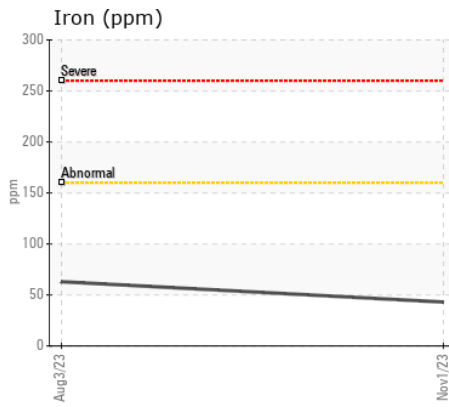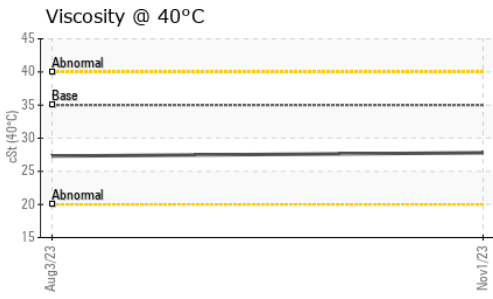

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP368260 **Received** : 11 Jan 2024
Lab Number : 06058517 **Diagnosed** : 12 Jan 2024
Unique Number : 10829899 **Diagnostician** : Wes Davis
Test Package : MOB 1

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834
 Contact: ALLEN WILLIAMS
 allen.williams@ascendummachinery.com
 T:
 F: (704)494-8197

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)