



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2111
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0876693	WC0717343	WC0686074
Sample Date		Client Info		06 Jan 2024	08 Jan 2023	15 Jul 2022
Machine Age	mls	Client Info		453990	328868	277726
Oil Age	mls	Client Info		50000	50000	100000
Filter Age	mls	Client Info		50000	50000	50000
Oil Changed		Client Info		Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	54	28	83
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	14	8	9
Lead	ppm	ASTM D5185m	>40	1	1	3
Copper	ppm	ASTM D5185m	>330	7	4	10
Tin	ppm	ASTM D5185m	>15	1	1	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	14	8
Potassium	ppm	ASTM D5185m	>20	9	6	15
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.3	0.7	1.2
Nitration	Abs/cm	*ASTM D7624	>20	13.4	10.5	19.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.0	24.8	36.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	6
Boron	ppm	ASTM D5185m	250	8	17	6
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	62	64	67
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	1021	567	1214
Calcium	ppm	ASTM D5185m	3000	893	1734	988
Phosphorus	ppm	ASTM D5185m	1150	1045	1022	1075
Zinc	ppm	ASTM D5185m	1350	1243	1347	1393
Sulfur	ppm	ASTM D5185m	4250	3048	3696	3504
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.3	21.4	43.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	4.3	6.0	▲ 2.4
Visc @ 100°C	cSt	ASTM D445	10.9	12.2	12.6	12.4

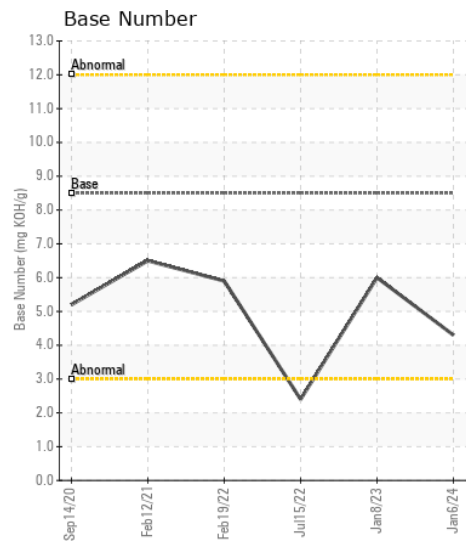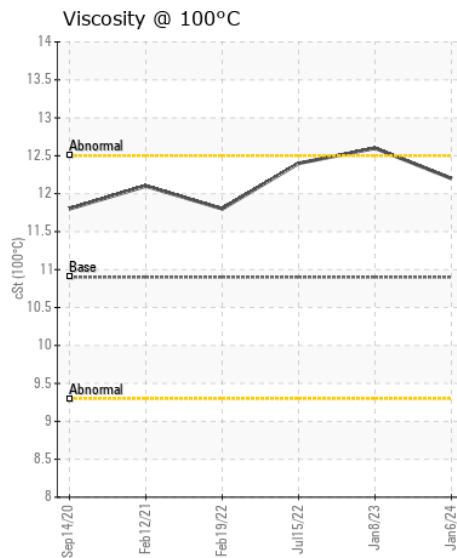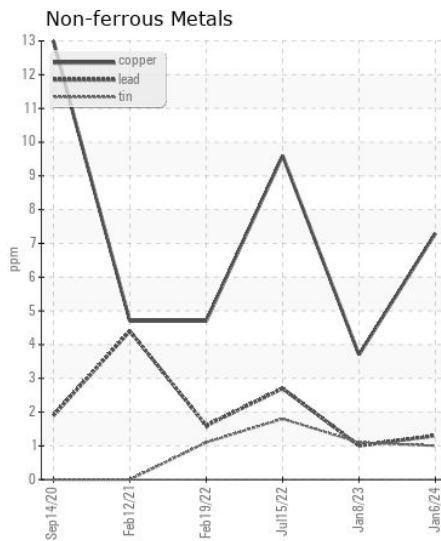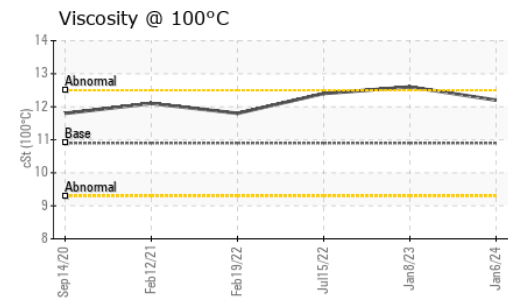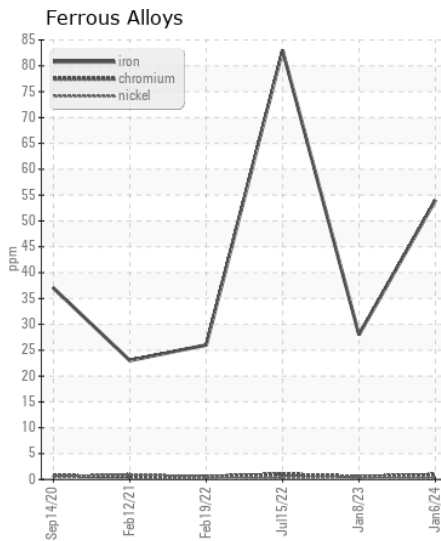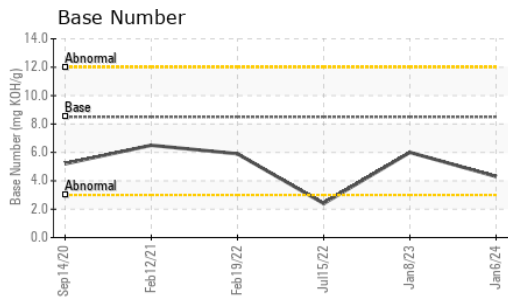

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876693 **Received** : 11 Jan 2024
Lab Number : 06058675 **Diagnosed** : 14 Jan 2024
Unique Number : 10830057 **Diagnostician** : Don Baldridge
Test Package : FLEET

MABE TRUCKING
 PO BOX 1081
 EDEN, NC
 US 27289

Contact: MAINTENANCE
 maintenancemanager@mabetrucking.com
 T:
 F: (336)635-1791

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)