



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**GCCS XTEND**  
 Machine Id  
**ATLAS COPCO ITJ064813 - TROBINSON GLASS**  
 Component  
**Compressor**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCH06058787	UCH05342086	---
Sample Date		Client Info		21 Dec 2023	11 Aug 2021	---
Machine Age	hrs	Client Info		8805	4229	---
Oil Age	hrs	Client Info		4000	4229	---
Filter Age	hrs	Client Info		0	2000	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<1	1	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m		<1	1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>15	2	<1	---
Lead	ppm	ASTM D5185m	>65	0	0	---
Copper	ppm	ASTM D5185m	>65	1	<1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	9	15	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m		0	<1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		0	0	---
Calcium	ppm	ASTM D5185m		0	0	---
Phosphorus	ppm	ASTM D5185m		333	372	---
Zinc	ppm	ASTM D5185m		29	75	---
Sulfur	ppm	ASTM D5185m		939	628	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.22	0.177	---
Visc @ 40°C	cSt	ASTM D445		45.6	45.8	---

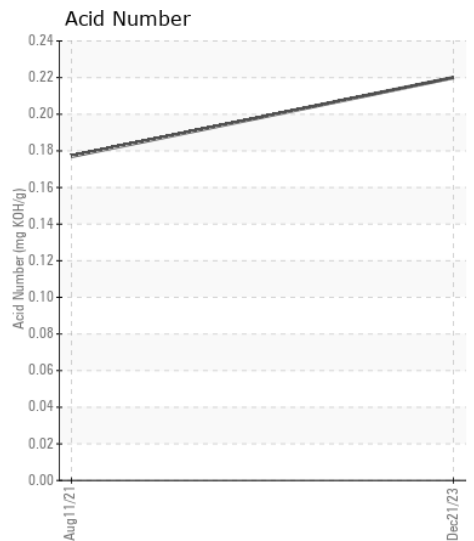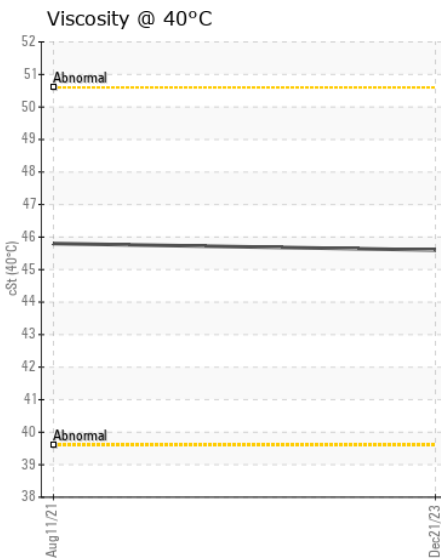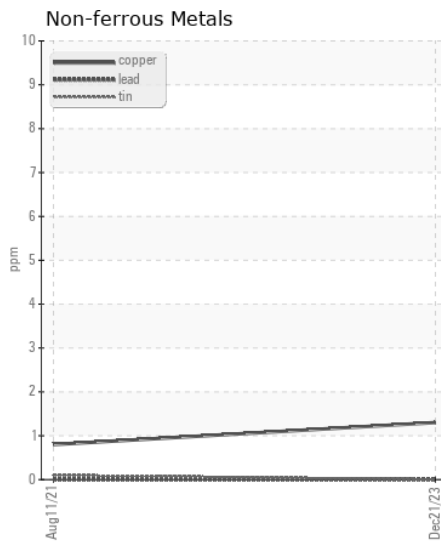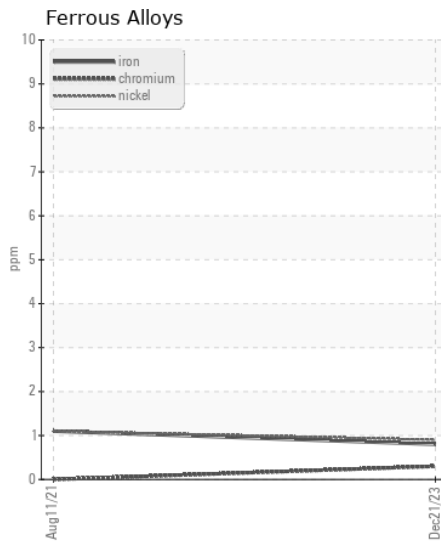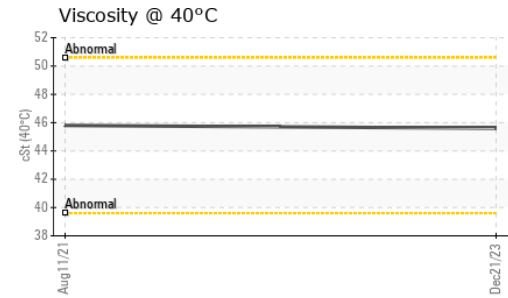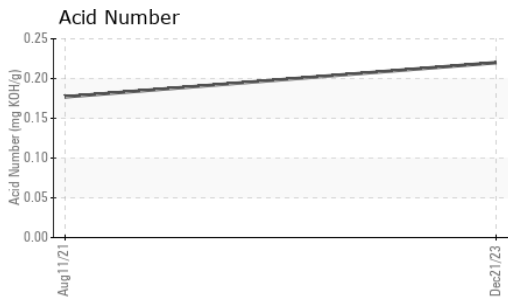

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCH06058787 **Recieved** : 11 Jan 2024  
**Lab Number** : 06058787 **Diagnosed** : 14 Jan 2024  
**Unique Number** : 10830169 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**GREEN COUNTY COMPRESSOR SERVICE**  
 11974 E 530 RD  
 CLAREMORE, OK  
 US 74019  
 Contact: ASHLEY PIGUET  
 ashley@gccs.us.com  
 T: (918)906-6343  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)