



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JENBACHER GM01 (S/N 1144716)
Component
Biogas Engine
Fluid
MAHLER Q8 Mahler G8 SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0880404	WC0721816	WC0880443
Sample Date		Client Info		08 Jan 2024	15 Dec 2023	07 Dec 2023
Machine Age	hrs	Client Info		50507	50203	50114
Oil Age	hrs	Client Info		5042	4738	4649
Filter Age	hrs	Client Info		5042	4738	4649
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	4	<1	5
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	1	4
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>15	1	0	1
Tin	ppm	ASTM D5185m	>5	3	2	3
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>200	63	26	56
Potassium	ppm	ASTM D5185m	>20	3	<1	4
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>2	0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	6.7	6.0	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.7	16.3	18.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>20	0	0	0
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	0	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		12	9	0
Calcium	ppm	ASTM D5185m		2952	2190	2383
Phosphorus	ppm	ASTM D5185m		590	366	419
Zinc	ppm	ASTM D5185m		630	466	569
Sulfur	ppm	ASTM D5185m		3524	2281	3064
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.2	10.8	14.0
Acid Number (AN)	mg KOH/g	ASTM D8045		0.51	0.55	1.12
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	7.59	8.13	7.32
Visc @ 100°C	cSt	ASTM D445	13.2	13.4	13.3	13.8

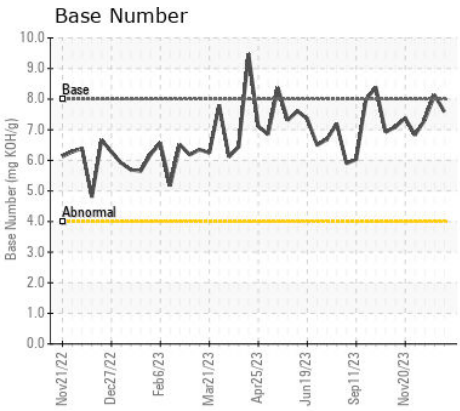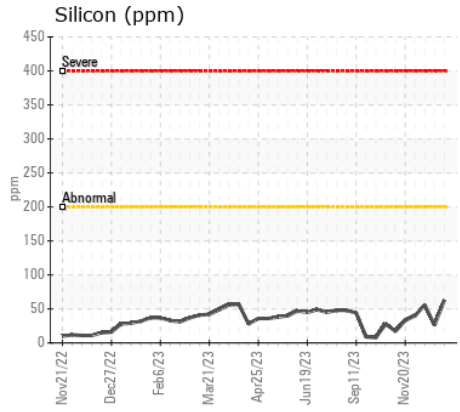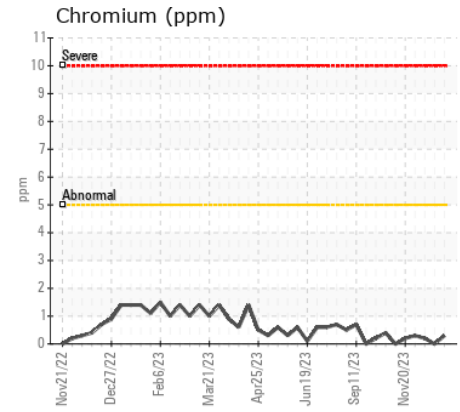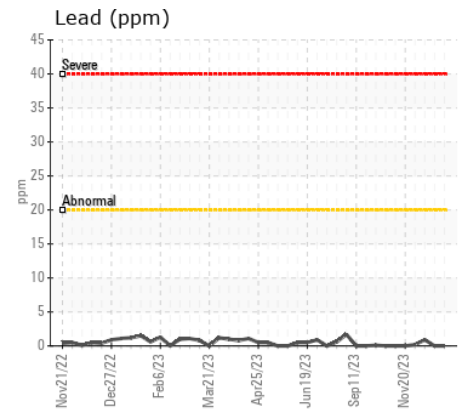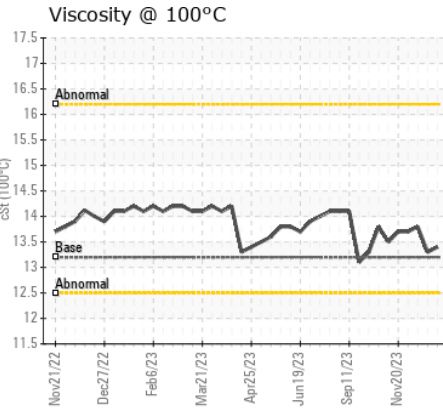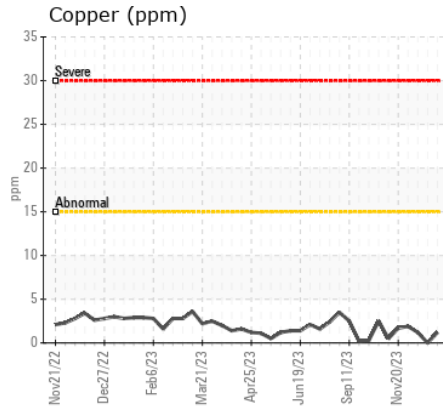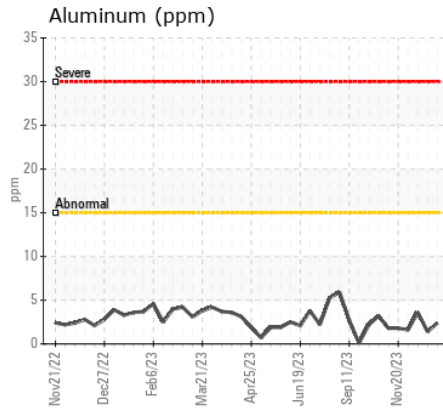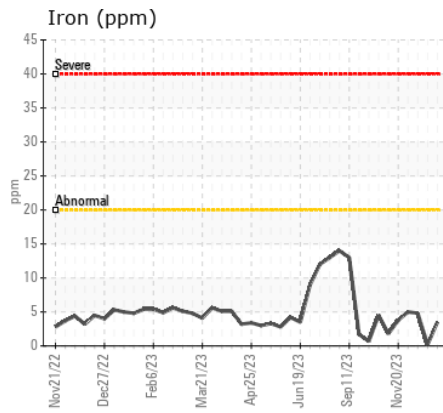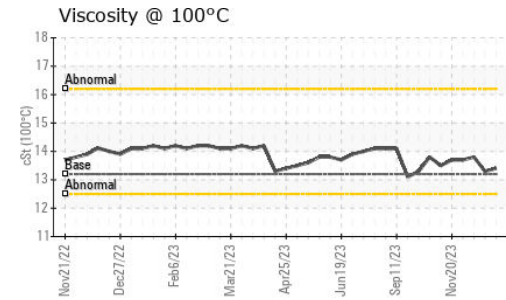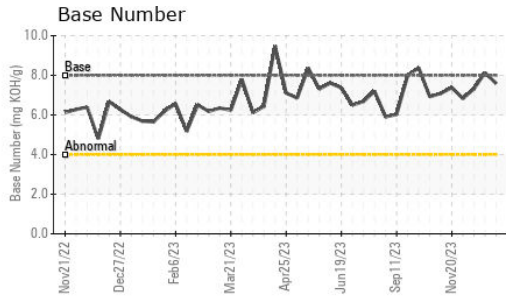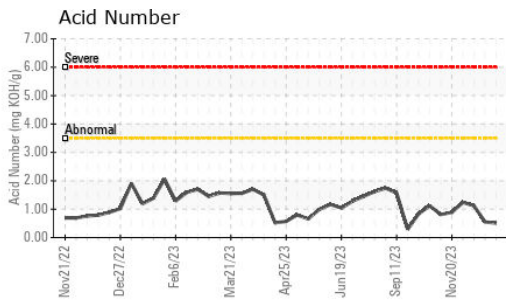

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0880404 **Received** : 11 Jan 2024
Lab Number : 06058826 **Diagnosed** : 15 Jan 2024
Unique Number : 10830208 **Diagnostician** : Jonathan Hester
Test Package : MOB 2

PINE RIDGE
 105 BAILEY JESTER RD
 GRIFFIN, GA
 US 30224

Contact: STEPHEN SAVAGE
 stephen.savage@cubedistrictenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: