



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
SIMPLOT [A34338]
 Machine Id
1LU204LXL2B056177

Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A34338)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0005996	---	---
Sample Date		Client Info		09 Jan 2024	---	---
Machine Age	hrs	Client Info		1385	---	---
Oil Age	hrs	Client Info		1385	---	---
Filter Age	hrs	Client Info		1385	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	21	---	---
Iron	ppm	ASTM D5185m	>200	95	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>7	0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>45	<1	---	---
Copper	ppm	ASTM D5185m	>225	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	30	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The fluid viscosity is higher than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		14	---	---
Boron	ppm	ASTM D5185m	6	0	---	---
Barium	ppm	ASTM D5185m	0	7	---	---
Molybdenum	ppm	ASTM D5185m	0	3	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	145	▲ 4	---	---
Calcium	ppm	ASTM D5185m	3570	▲ 24	---	---
Phosphorus	ppm	ASTM D5185m	1290	▲ 2159	---	---
Zinc	ppm	ASTM D5185m	1640	▲ 159	---	---
Sulfur	ppm	ASTM D5185m		▲ 30176	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	▲ 195	---	---

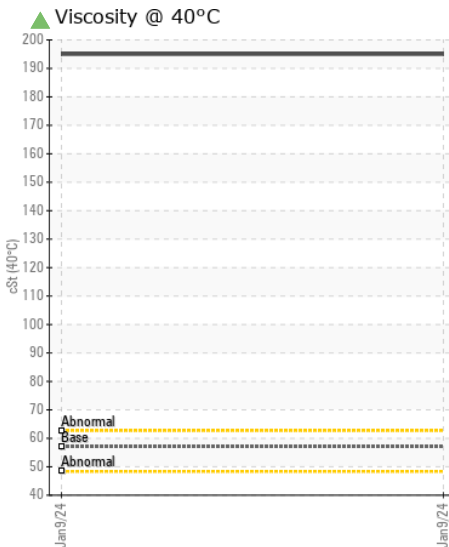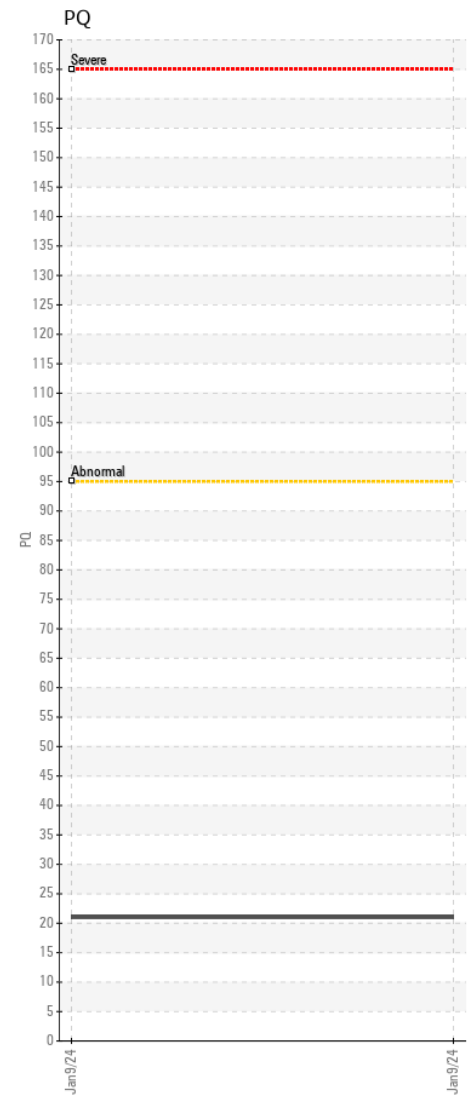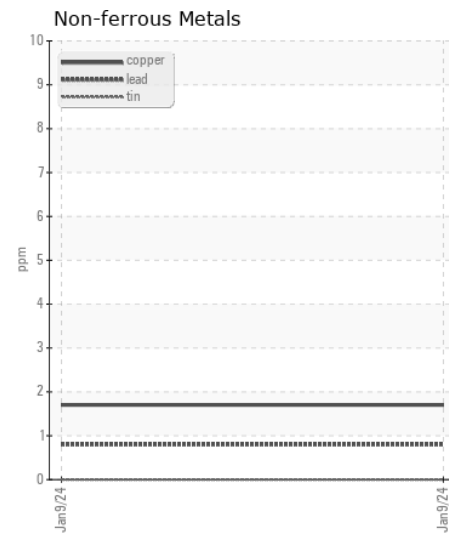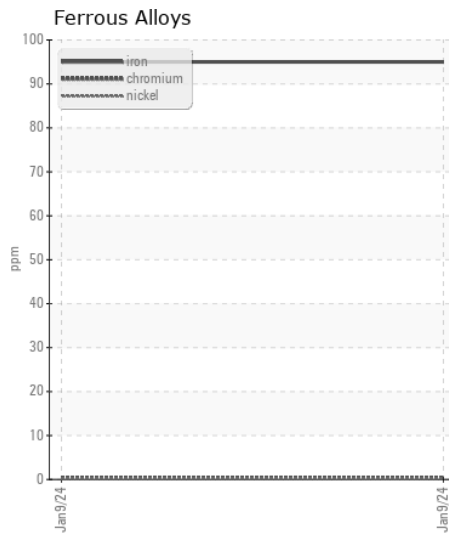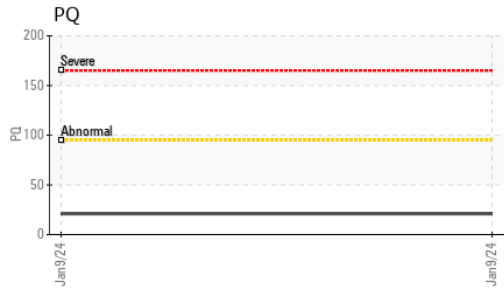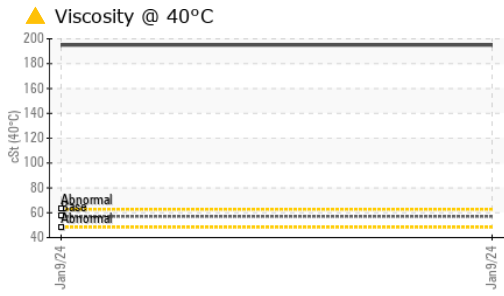

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WE0005996 Recieved : 11 Jan 2024
 Lab Number : 06058877 Diagnosed : 15 Jan 2024
 Unique Number : 10830259 Diagnostician : Don Baldrige
 Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE
 25135 ONE AVIATION WAY SW
 MADISON, AL
 US 35756
 Contact: HERBERT STONE
 WTE013@WARRIORTRACTOR.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: