



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624L L-227 (S/N 1DW624LZTMF709007)

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196044	JR0126505	---
Sample Date		Client Info		09 Jan 2024	16 May 2022	---
Machine Age	hrs	Client Info		9079	3098	---
Oil Age	hrs	Client Info		9079	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	14	16	---
Iron	ppm	ASTM D5185m	>200	33	37	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>7	0	<1	---
Aluminum	ppm	ASTM D5185m	>25	2	2	---
Lead	ppm	ASTM D5185m	>45	<1	<1	---
Copper	ppm	ASTM D5185m	>225	4	6	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	11	▲ 26	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	20	---
Boron	ppm	ASTM D5185m	6	0	3	---
Barium	ppm	ASTM D5185m	0	3	0	---
Molybdenum	ppm	ASTM D5185m	0	1	2	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	145	94	90	---
Calcium	ppm	ASTM D5185m	3570	3324	3173	---
Phosphorus	ppm	ASTM D5185m	1290	1068	993	---
Zinc	ppm	ASTM D5185m	1640	1152	1028	---
Sulfur	ppm	ASTM D5185m		4062	3049	---
Visc @ 40°C	cSt	ASTM D445	57.0	49.3	43.2	---

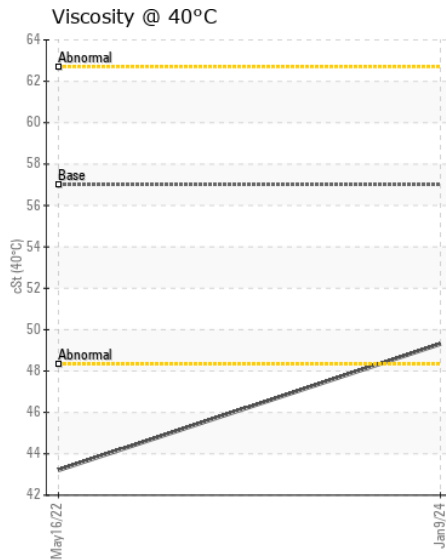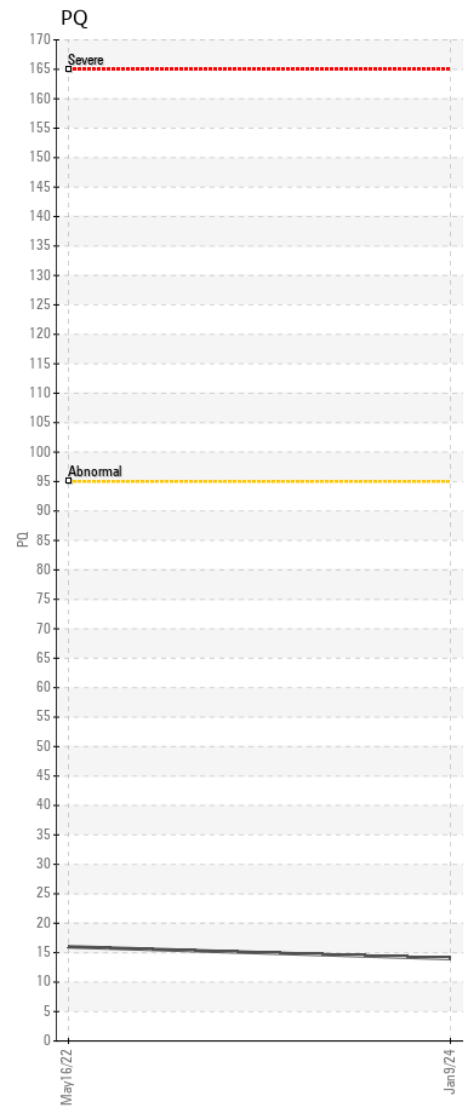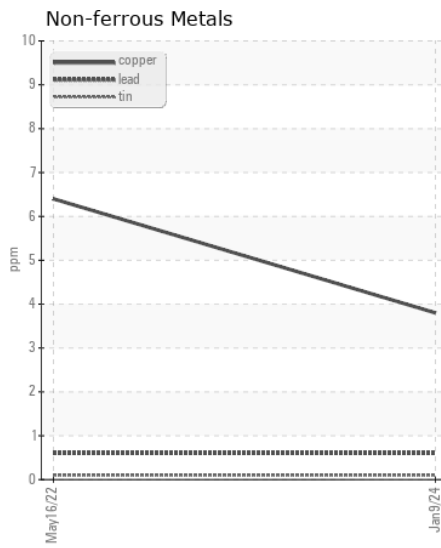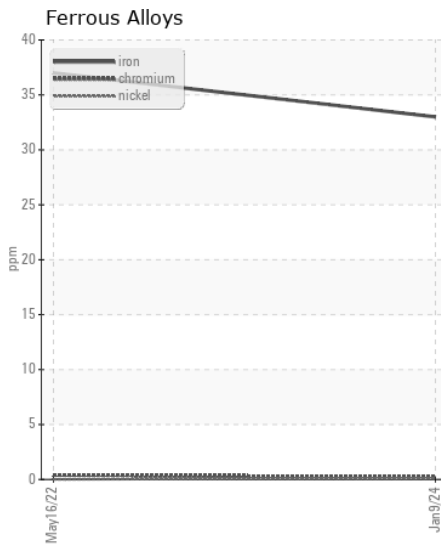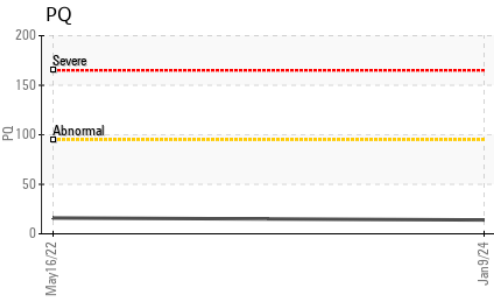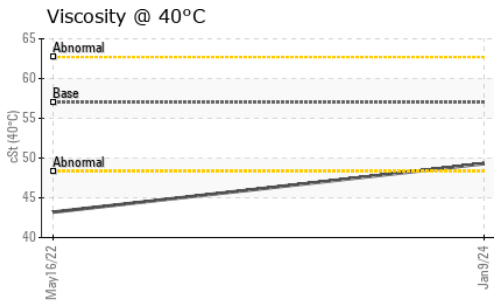

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196044 **Received** : 11 Jan 2024
Lab Number : 06058879 **Diagnosed** : 12 Jan 2024
Unique Number : 10830261 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

C & D RECOVERY
 24024 FREDERICK RD
 CLARKSBURG, MD
 US 20871
 Contact: HERBIE TRENT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: