



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 3035D 1PY3035DEKB000888**

Component  
**Hydrostatic**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0137484</b>	---	---
Sample Date		Client Info		<b>09 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>669</b>	---	---
Oil Age	hrs	Client Info		<b>669</b>	---	---
Filter Age	hrs	Client Info		<b>669</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

The iron level is abnormal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>31	<b>▲ 42</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>11	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>41	<b>11</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>7</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>20000	<b>▲ 173686</b>	---	---
Particles >6µm		ASTM D7647	>5000	<b>▲ 19015</b>	---	---
Particles >14µm		ASTM D7647	>640	<b>40</b>	---	---
Particles >21µm		ASTM D7647	>160	<b>7</b>	---	---
Particles >38µm		ASTM D7647	>40	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>▲ 25/21/12</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>9</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>137</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>12</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>3726</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1192</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1476</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>11983</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	<b>1.45</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>83.7</b>	---	---

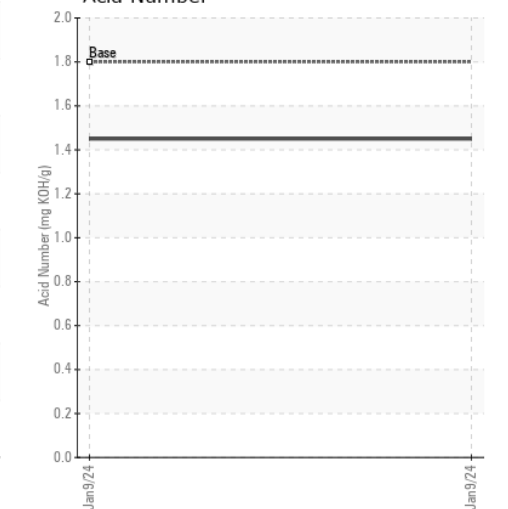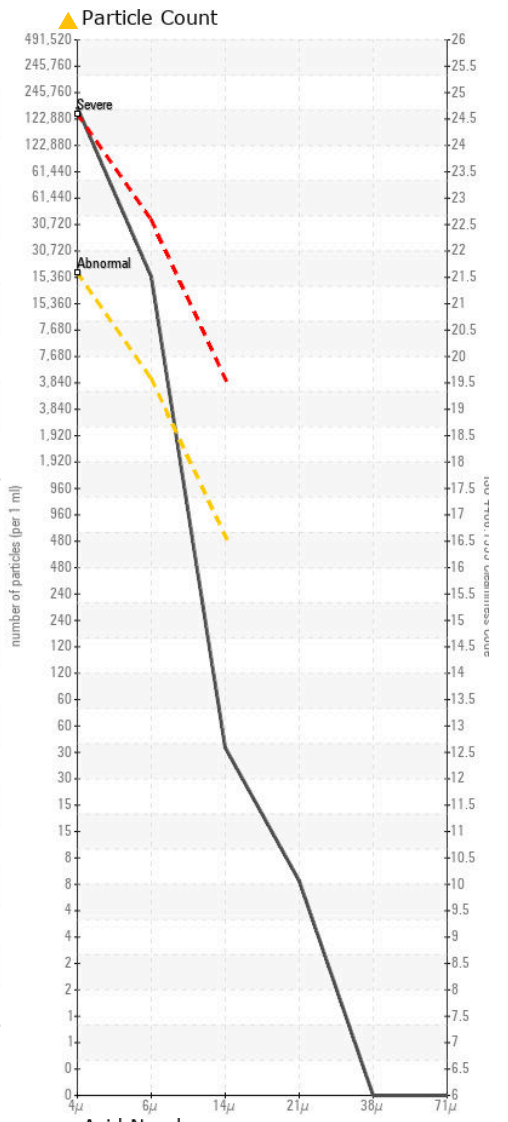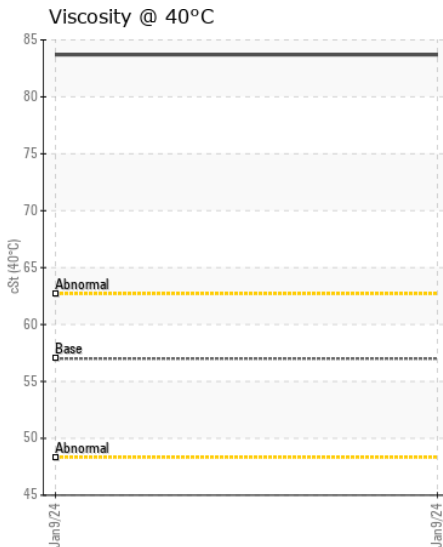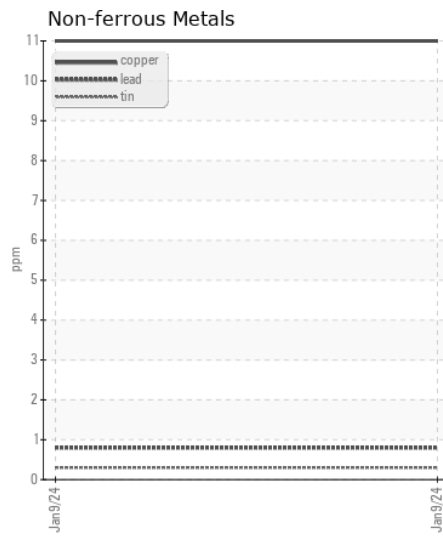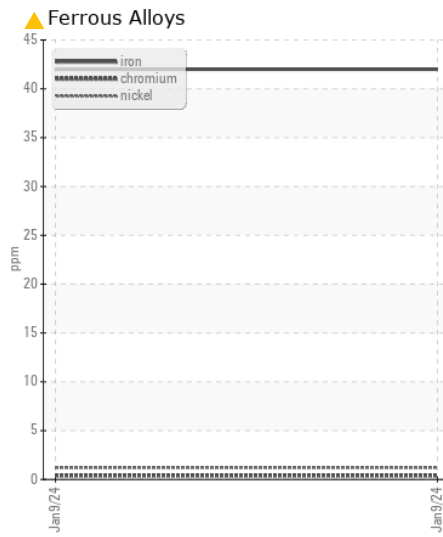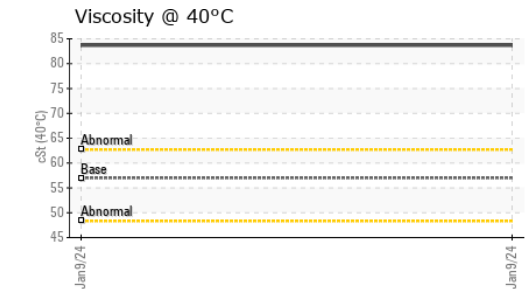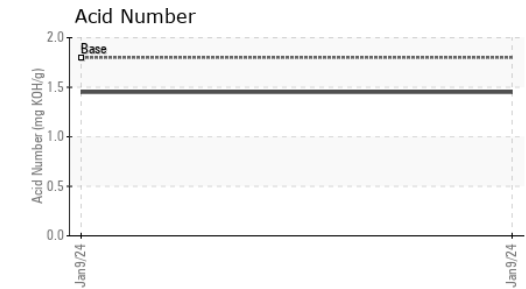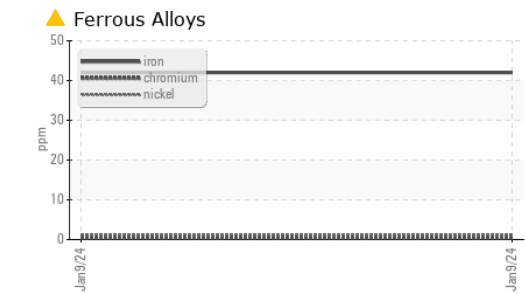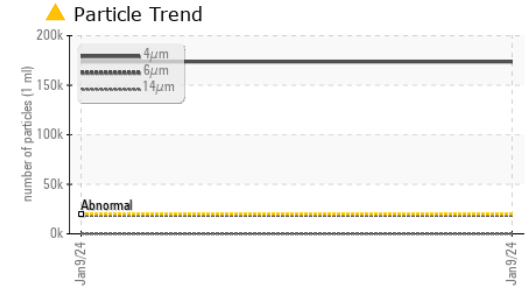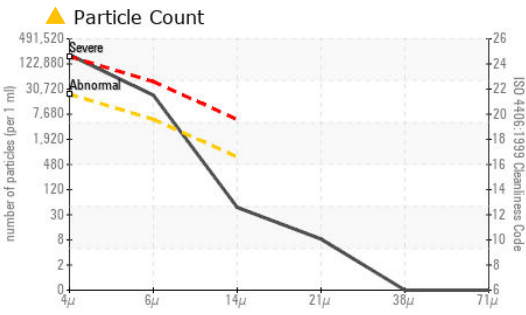

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0137484 **Received** : 11 Jan 2024  
**Lab Number** : 06058881 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10830263 **Diagnostician** : Jonathan Hester  
**Test Package** : MOBCE ( Additional Tests: PQ, PRTCOUNT )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - WILKESBORO**  
 288 WESTGATE DRIVE  
 WILKESBORO, NC  
 US 28697

Contact: BUTCH JANES  
 bjanes@jamesriverequipment.com

T: (336)973-8201  
 F: (336)973-8496