



# LIEBHERR

## OIL ANALYSIS REPORT



Area  
**[MH1914]**  
 Machine Id  
**LIEBHERR LH60 1217-143694**  
 Component  
**Front Left Wheel Hub**  
 Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0276066</b>	---	---
Sample Date		Client Info		<b>21 Nov 2023</b>	---	---
Machine Age	hrs	Client Info		<b>1960</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>None</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>650	<b>23</b>	---	---
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>60	<b>11</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>7</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<1	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	<1	<b>8</b>	---	---
Phosphorus	ppm	ASTM D5185m	2143	<b>1889</b>	---	---
Zinc	ppm	ASTM D5185m	<1	<b>14</b>	---	---
Sulfur	ppm	ASTM D5185m	23468	<b>27217</b>	---	---
Visc @ 40°C	cSt	ASTM D445	170	<b>176</b>	---	---

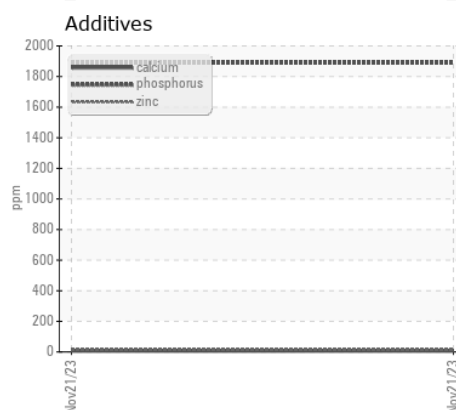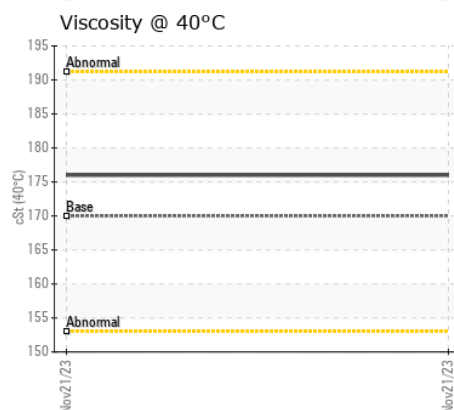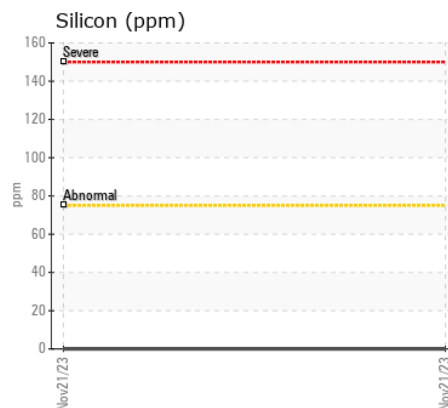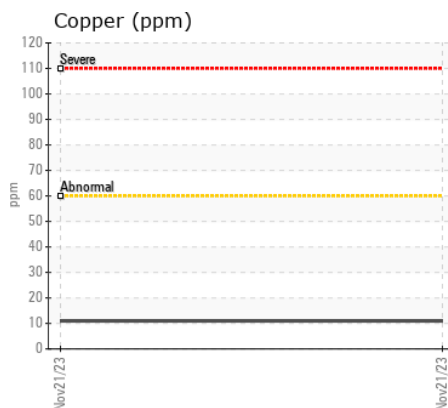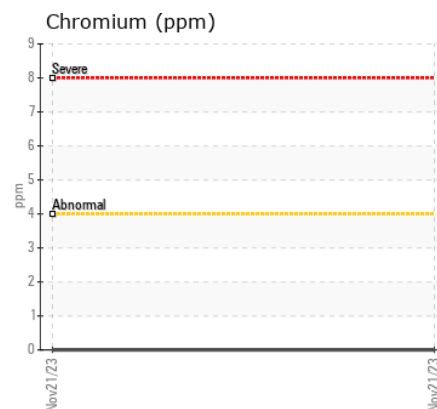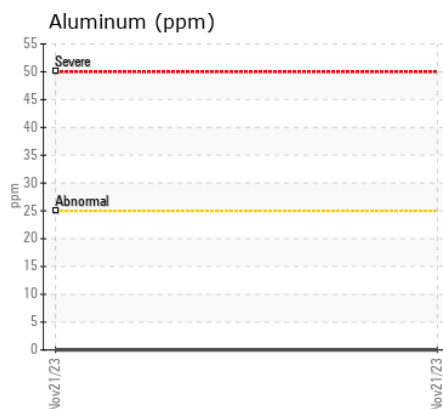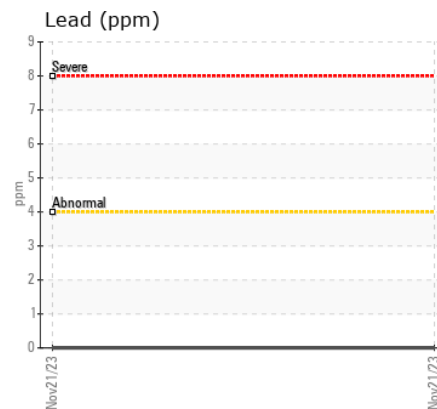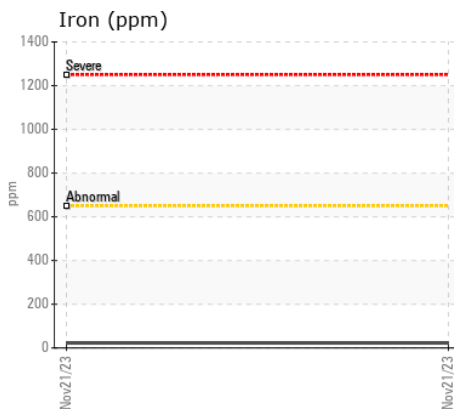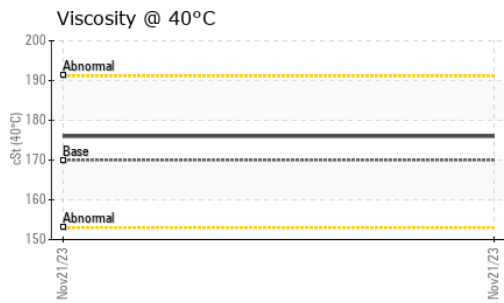

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : LH0276066      Recieved : 11 Jan 2024  
 Lab Number : 06058914      Diagnosed : 12 Jan 2024  
 Unique Number : 10830296      Diagnostician : Wes Davis  
 Test Package : MOBCE

**C AND B EQUIPMENT, LLC**  
 4831 US-42  
 GHENT, KY  
 US 41045  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: