



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
42320
Component
Diesel Engine
Fluid
VALVOLINE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0034276	IL05967308	---
Sample Date		Client Info		13 Dec 2023	06 Sep 2023	---
Machine Age	mls	Client Info		42690	27233	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	19	67	---
Chromium	ppm	ASTM D5185m	>20	2	3	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	8	39	---
Lead	ppm	ASTM D5185m	>40	4	6	---
Copper	ppm	ASTM D5185m	>330	8	28	---
Tin	ppm	ASTM D5185m	>15	2	3	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	▲ 42	---
Potassium	ppm	ASTM D5185m	>20	27	128	---
Fuel		WC Method	>5	<1.0	1.4	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	10.2	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	25.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m	39	26	20	---
Barium	ppm	ASTM D5185m	1	0	1	---
Molybdenum	ppm	ASTM D5185m	49	65	66	---
Manganese	ppm	ASTM D5185m	1	1	6	---
Magnesium	ppm	ASTM D5185m	616	793	428	---
Calcium	ppm	ASTM D5185m	1554	1408	1682	---
Phosphorus	ppm	ASTM D5185m	899	792	962	---
Zinc	ppm	ASTM D5185m	1069	1069	1223	---
Sulfur	ppm	ASTM D5185m	2624	2808	3193	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.4	24.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	6.1	4.8	---
Visc @ 100°C	cSt	ASTM D445	13.6	12.7	11.6	---

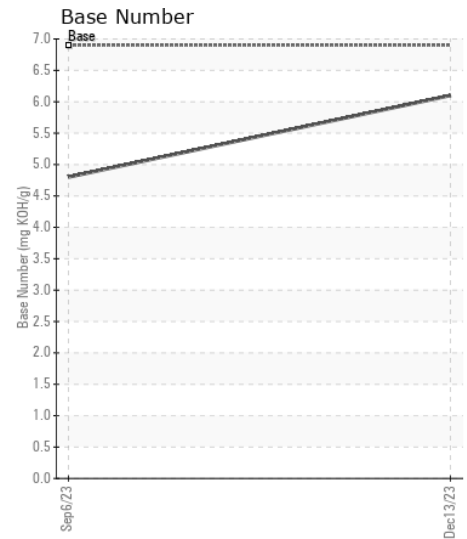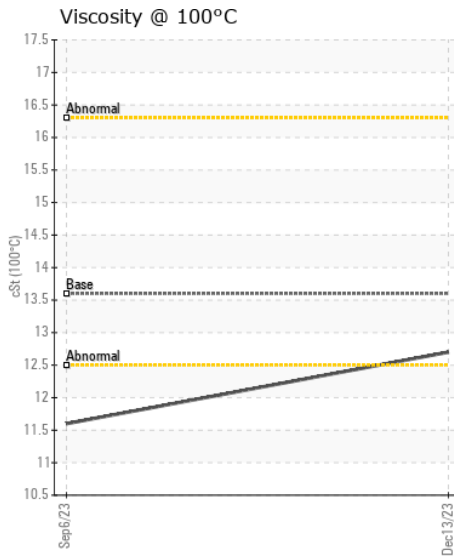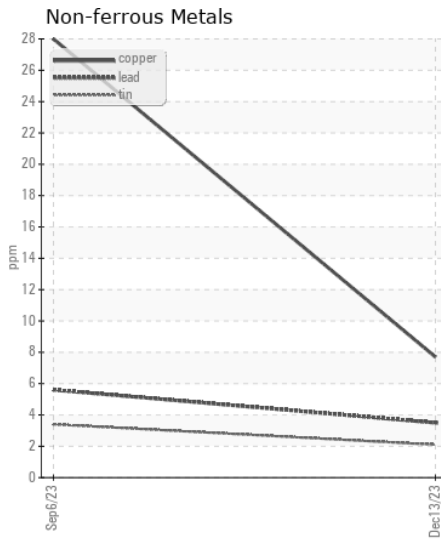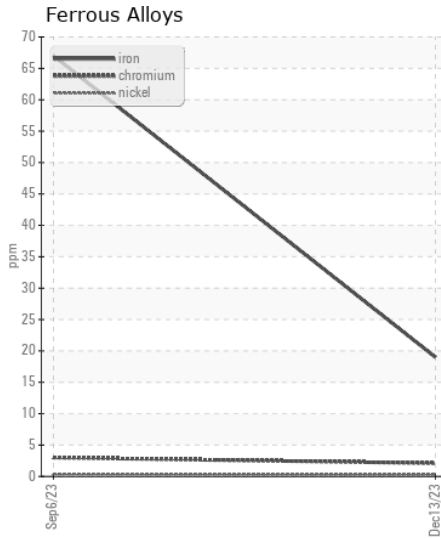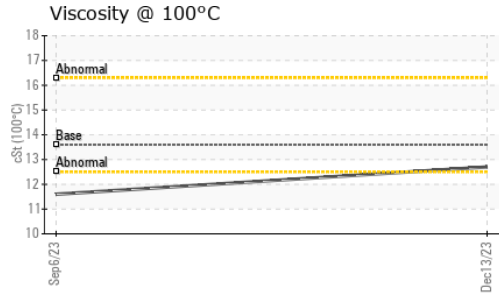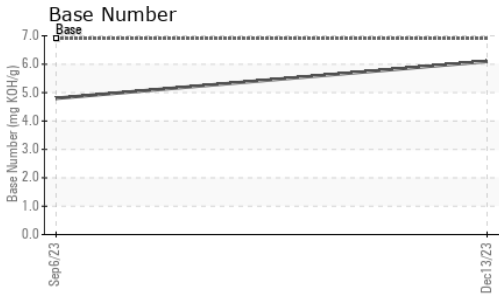

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0034276 **Received** : 12 Jan 2024
Lab Number : 06058964 **Diagnosed** : 12 Jan 2024
Unique Number : 10830346 **Diagnostician** : Wes Davis
Test Package : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TAMPA IDEALEASE
 5951 ORIENT ROAD
 TAMPA, FL
 US 33610-9565
 Contact: Russ Cook
 russcook@idealease.com
 T: (813)626-9285
 F: (844)270-1356