



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(66454Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A624116
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0103617	---	---
Sample Date		Client Info		21 Dec 2023	---	---
Machine Age	mls	Client Info		29368	---	---
Oil Age	mls	Client Info		29368	---	---
Filter Age	mls	Client Info		29368	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	38	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	16	---	---
Lead	ppm	ASTM D5185m	>40	3	---	---
Copper	ppm	ASTM D5185m	>330	21	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	35	---	---
Potassium	ppm	ASTM D5185m	>20	43	---	---
Fuel		WC Method	>2.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	2	48	---	---
Barium	ppm	ASTM D5185m	0	4	---	---
Molybdenum	ppm	ASTM D5185m	50	61	---	---
Manganese	ppm	ASTM D5185m	0	4	---	---
Magnesium	ppm	ASTM D5185m	950	496	---	---
Calcium	ppm	ASTM D5185m	1050	1737	---	---
Phosphorus	ppm	ASTM D5185m	995	1033	---	---
Zinc	ppm	ASTM D5185m	1180	1313	---	---
Sulfur	ppm	ASTM D5185m	2600	3108	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.7	---	---
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	---	---

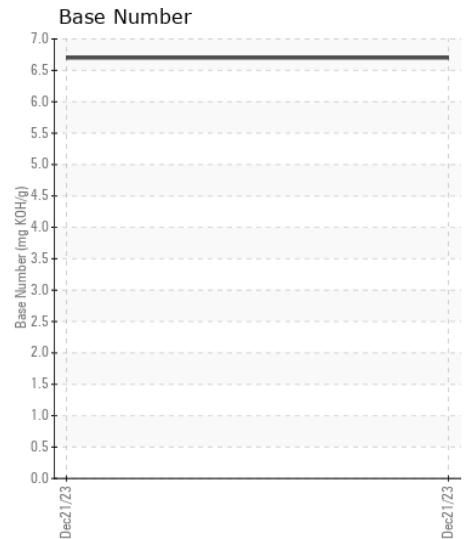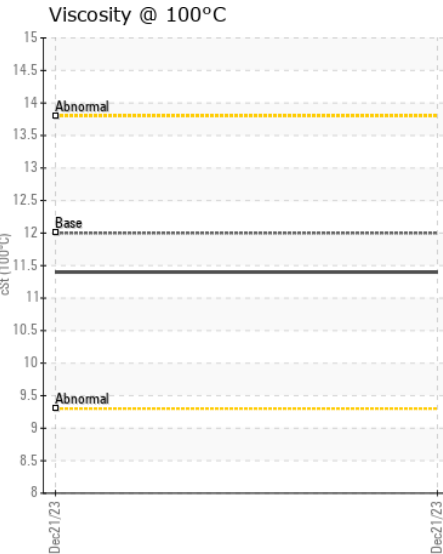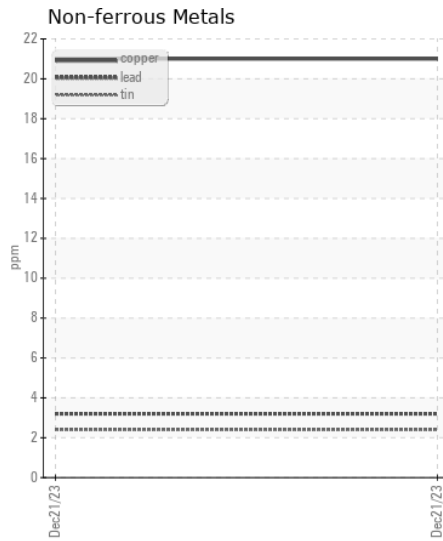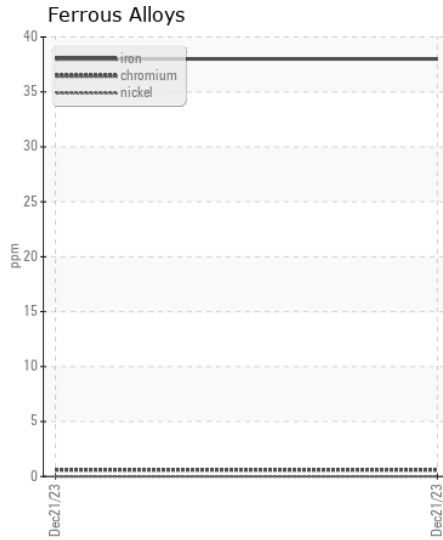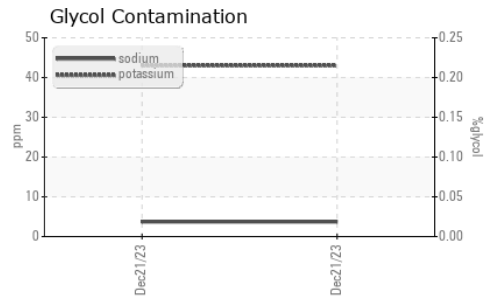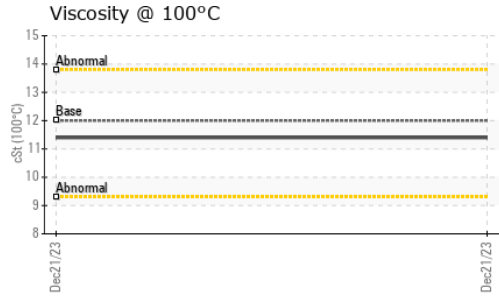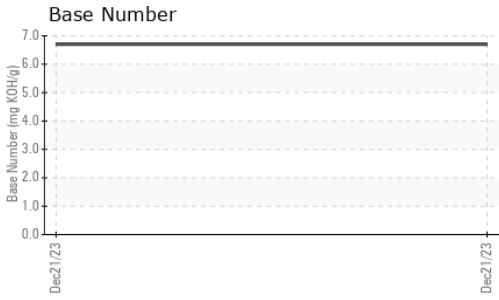

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0103617 **Received** : 12 Jan 2024
Lab Number : 06059011 **Diagnosed** : 16 Jan 2024
Unique Number : 10830393 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: GLYCOL)

Transervice - Shop 1365 - Berkeley-Nazareth
 6813 Chrisphalt Drive
 Bath Borough, PA
 US 18014
 Contact: Stephen Mackes
 smackes@transervice.com
 T: (610)837-8103
 F: (610)837-8105

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)