



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 700L 1T0700LXJPF439990

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0189154	JR0177431	---
Sample Date		Client Info		04 Jan 2024	11 Aug 2023	---
Machine Age	hrs	Client Info		1014	468	---
Oil Age	hrs	Client Info		546	468	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	10	27	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	5	1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>31	5	4	---
Lead	ppm	ASTM D5185m	>26	1	1	---
Copper	ppm	ASTM D5185m	>26	11	▲ 93	---
Tin	ppm	ASTM D5185m	>4	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	6	11	---
Potassium	ppm	ASTM D5185m	>20	<1	3	---
Fuel		WC Method	>2.1	<1.0	0.3	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	8.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	22.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	1	0	---
Boron	ppm	ASTM D5185m		208	252	---
Barium	ppm	ASTM D5185m		0	5	---
Molybdenum	ppm	ASTM D5185m		233	271	---
Manganese	ppm	ASTM D5185m		1	4	---
Magnesium	ppm	ASTM D5185m		862	806	---
Calcium	ppm	ASTM D5185m		1369	1443	---
Phosphorus	ppm	ASTM D5185m		907	897	---
Zinc	ppm	ASTM D5185m		1167	1089	---
Sulfur	ppm	ASTM D5185m		3029	3080	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	17.1	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.2	9.1	---
Visc @ 100°C	cSt	ASTM D445		13.0	10.2	---

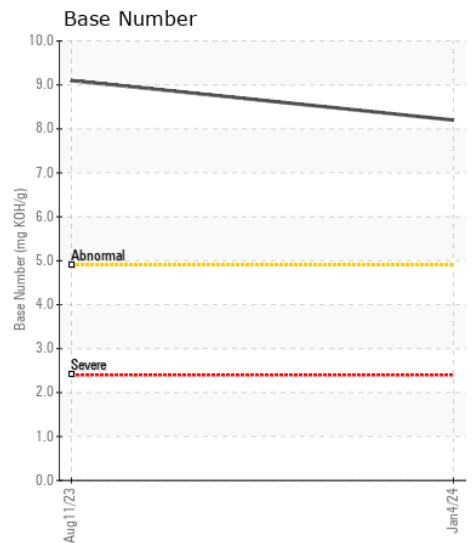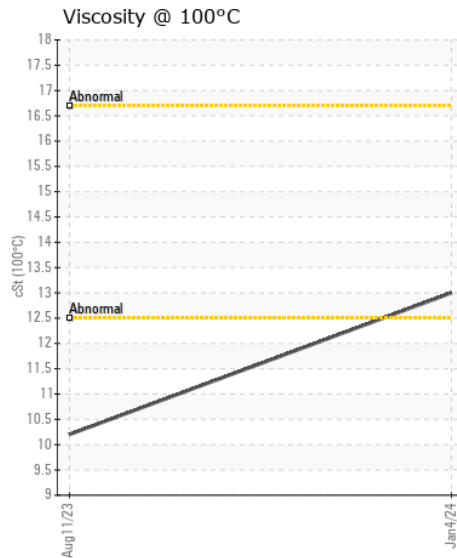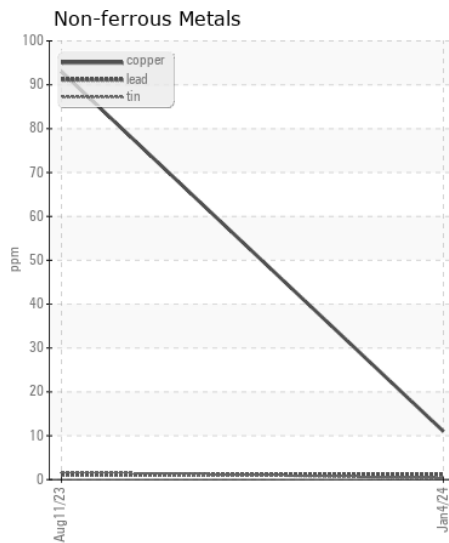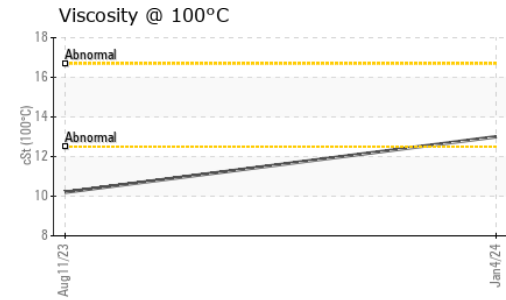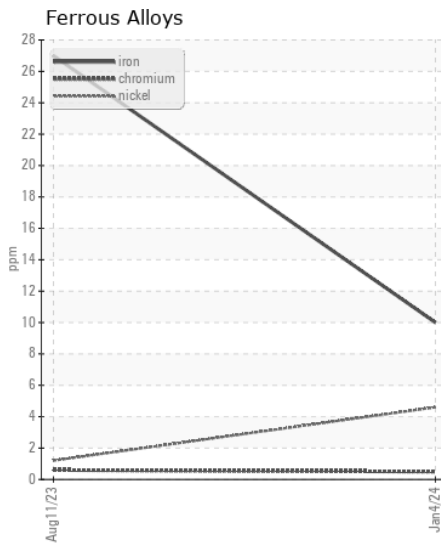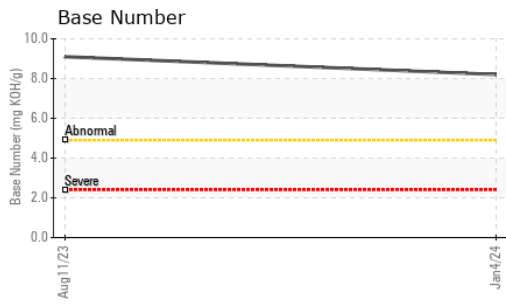

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189154 **Received** : 12 Jan 2024
Lab Number : 06059115 **Diagnosed** : 12 Jan 2024
Unique Number : 10830497 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)