



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**LOUISIANA HERITAGE**

Component  
**1 Steering**

Fluid  
**{not provided} (35 GAL)**

**RECOMMENDATION**

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0052253</b>	---	---
Sample Date		Client Info		<b>11 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>18</b>	---	---
Chromium	ppm	ASTM D5185m	>15	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










There is a high amount of particulates present in the fluid.

Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>2500	<b>▲ 135683</b>	---	---
Particles >6µm		ASTM D7647	>640	<b>▲ 46139</b>	---	---
Particles >14µm		ASTM D7647	>80	<b>▲ 1922</b>	---	---
Particles >21µm		ASTM D7647	>20	<b>▲ 379</b>	---	---
Particles >38µm		ASTM D7647	>4	<b>▲ 17</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<b>▲ 24/23/18</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	---	---
Calcium	ppm	ASTM D5185m		<b>52</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>330</b>	---	---
Zinc	ppm	ASTM D5185m		<b>401</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1238</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.40</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>31.9</b>	---	---

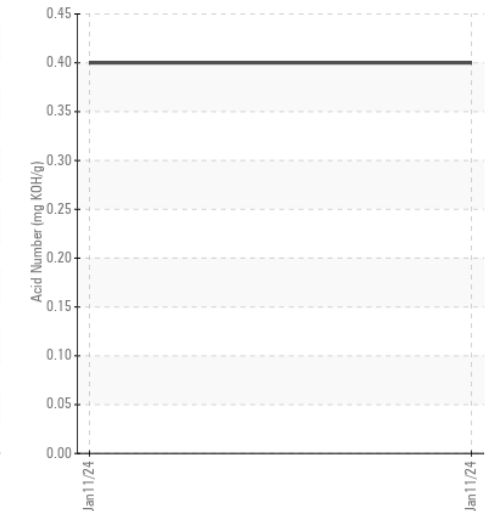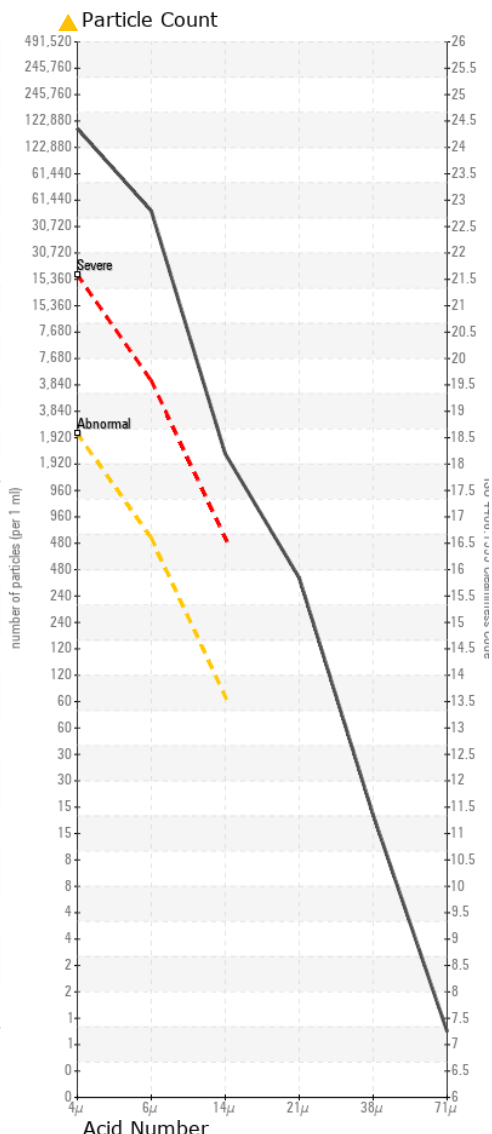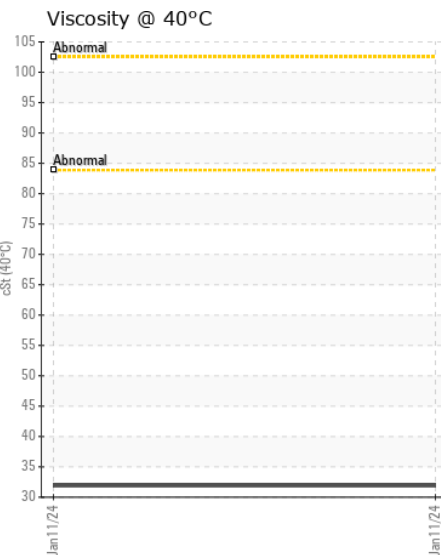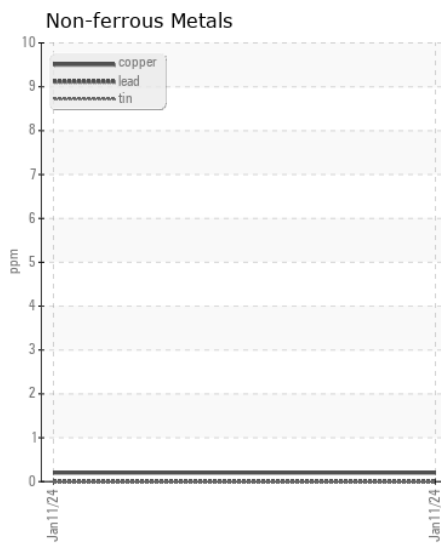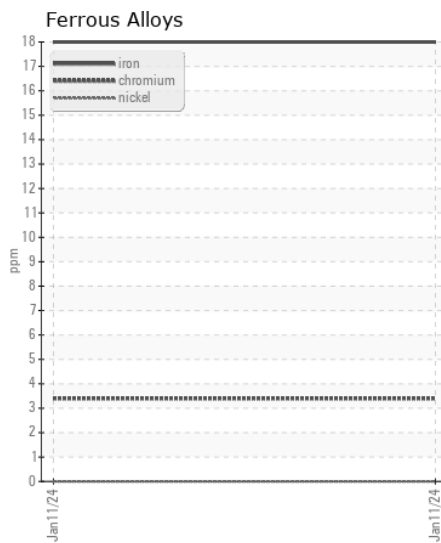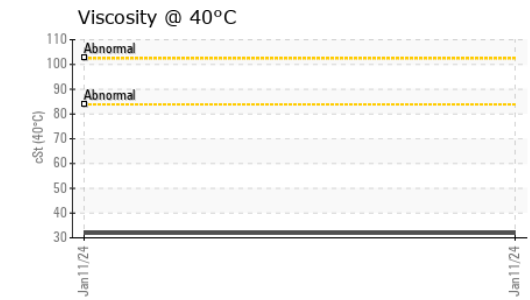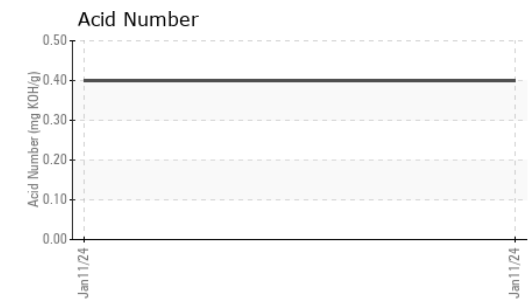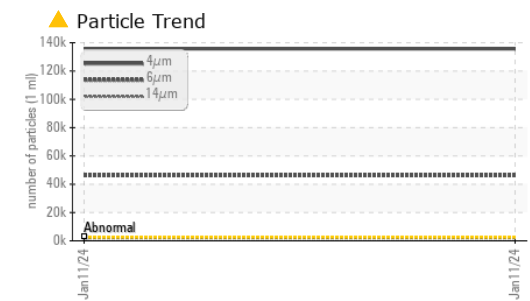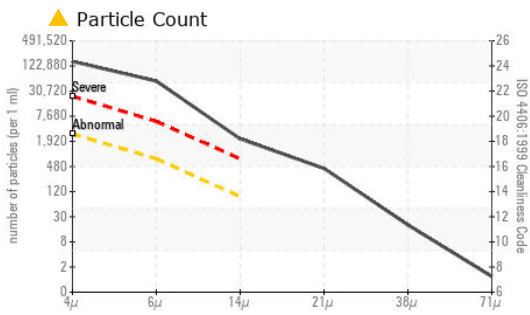

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0052253 **Received** : 12 Jan 2024  
**Lab Number** : 06059226 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10830608 **Diagnostician** : Don Baldrige  
**Test Package** : MAR 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**AMERICAN RIVER TRANSPORTATION CO.**

P.O. BOX 2889

ST. LOUIS, MO

US 63111

Contact: BRIAN GRIEWING

brian.griewing@adm.com

T:

F: (314)481-5278