



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[G14045]**

Machine Id

**JOHN DEERE 696766**

Component

**Transmission**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006214</b>	---	---
Sample Date		Client Info		<b>08 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1971</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	<b>12</b>	---	---
Iron	ppm	ASTM D5185m	>61	<b>14</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>9	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>11</b>	---	---
Tin	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.


Silicon	ppm	ASTM D5185m	>21	<b>▲ 32</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

## FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>30	<b>19</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>3</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>104</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>3155</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>974</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1299</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3585</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>42.6</b>	---	---


▲ Silicon (ppm)

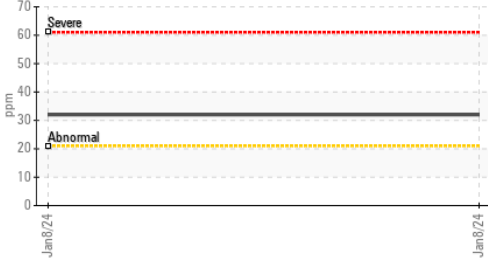


Ferrous Alloys

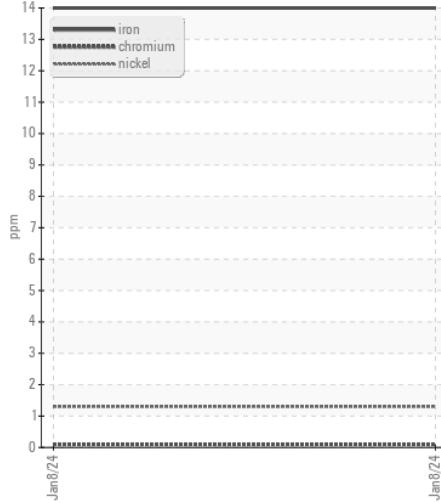


PQ

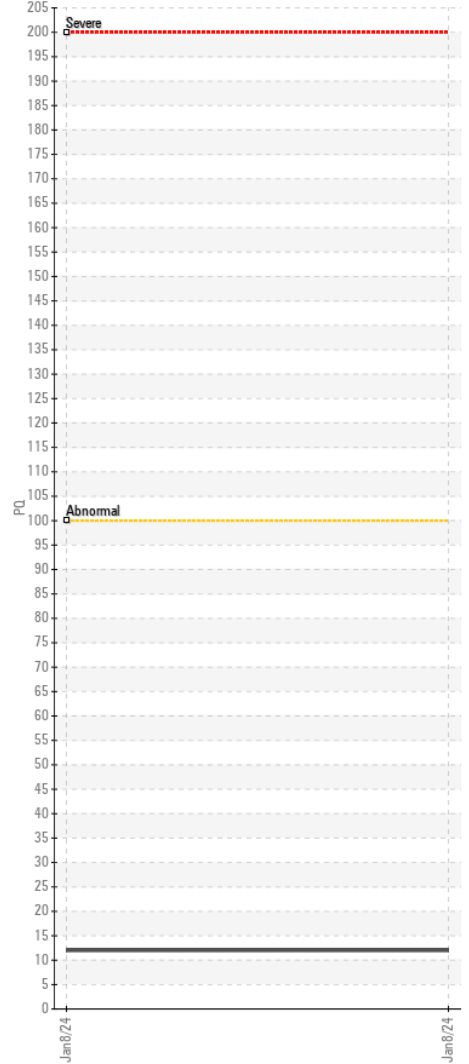


Viscosity @ 40°C

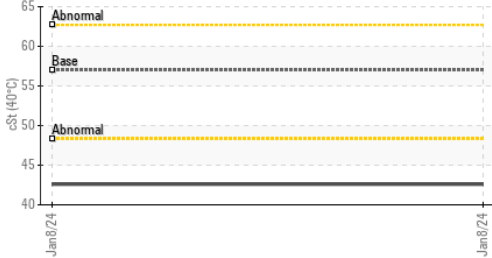


Non-ferrous Metals

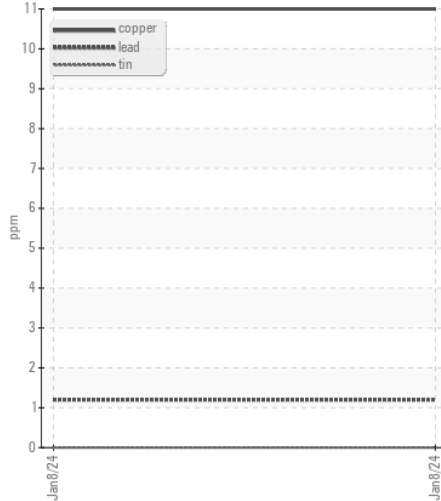

PQ

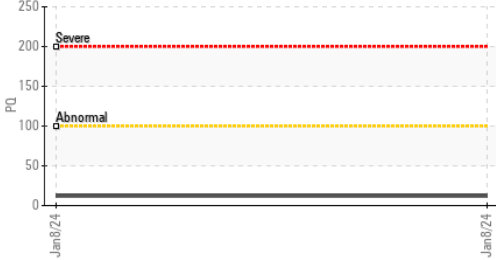

Viscosity @ 40°C

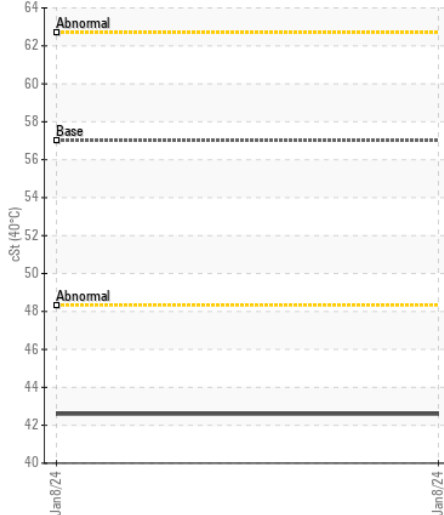

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006214 **Received** : 12 Jan 2024  
**Lab Number** : 06059436 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10830818 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE**  
 4308 WATER TRAIL  
 GRAYSVILLE, AL  
 US 35073  
 Contact: BEN BYRKET  
 bbyrket@warriortractor.com  
 T: (205)675-9045  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)