



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HITACHI 470LC HCMJAG60J00061713

Component
Left Final Drive

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0192905	JR0178931	JR0161936
Sample Date		Client Info		04 Jan 2024	28 Jul 2023	03 May 2023
Machine Age	hrs	Client Info		6892	1474	6892
Oil Age	hrs	Client Info		6892	1474	500
Filter Age	hrs	Client Info		0	1474	500
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Not Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		110	70	375
Iron	ppm	ASTM D5185m	>500	684	597	561
Chromium	ppm	ASTM D5185m	>10	10	9	6
Nickel	ppm	ASTM D5185m	>10	2	<1	2
Titanium	ppm	ASTM D5185m		1	1	3
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	10	11	▲ 45
Lead	ppm	ASTM D5185m	>25	<1	0	0
Copper	ppm	ASTM D5185m	>50	1	1	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	29	29	▲ 104
Potassium	ppm	ASTM D5185m	>20	15	17	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<1	2	4
Boron	ppm	ASTM D5185m	400	21	48	6
Barium	ppm	ASTM D5185m	200	9	4	0
Molybdenum	ppm	ASTM D5185m	12	0	0	<1
Manganese	ppm	ASTM D5185m		18	19	6
Magnesium	ppm	ASTM D5185m	12	3	0	8
Calcium	ppm	ASTM D5185m	150	11	3	13
Phosphorus	ppm	ASTM D5185m	1650	500	538	354
Zinc	ppm	ASTM D5185m	125	31	34	14
Sulfur	ppm	ASTM D5185m	22500	16561	18866	23529
Visc @ 40°C	cSt	ASTM D445	143	188	179	139

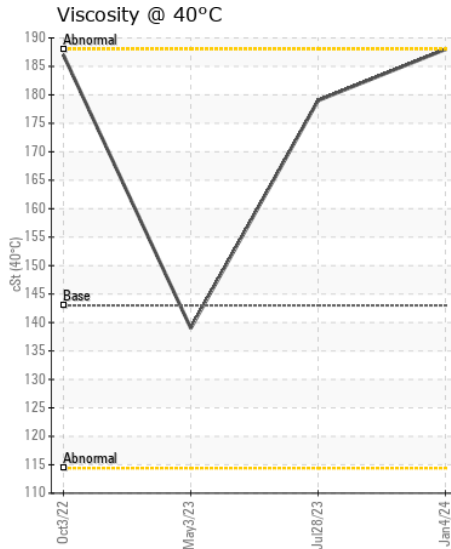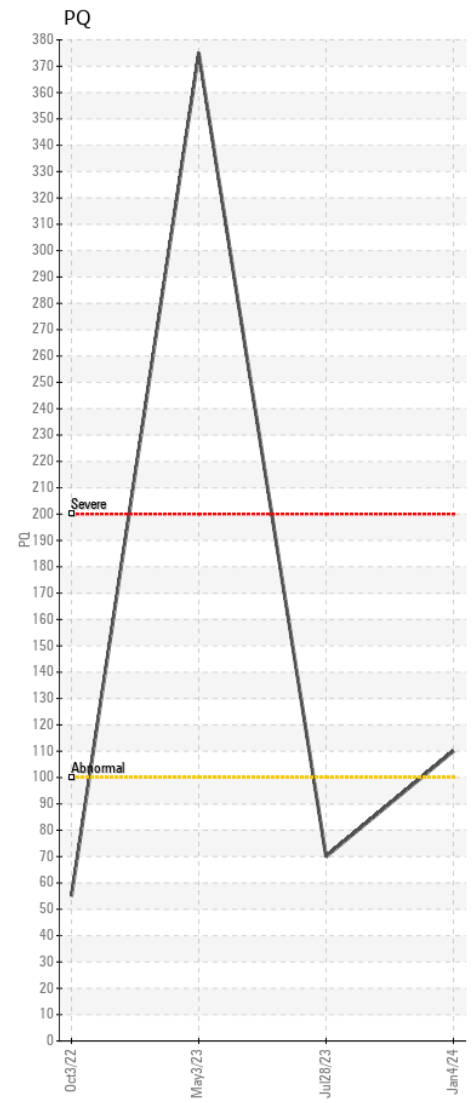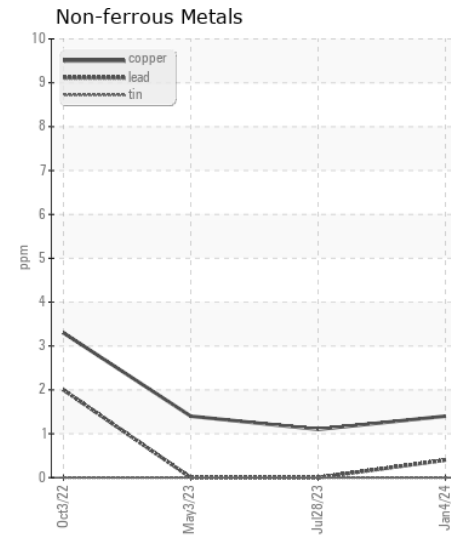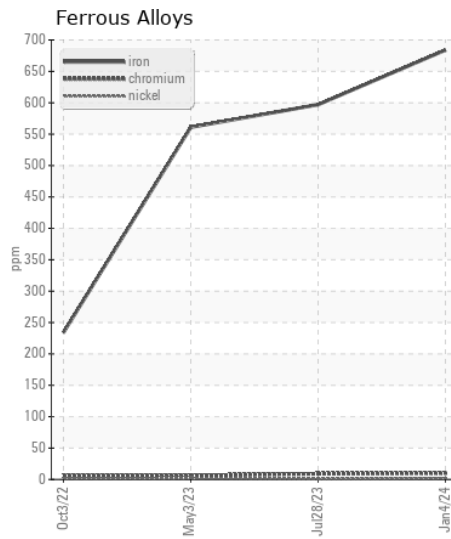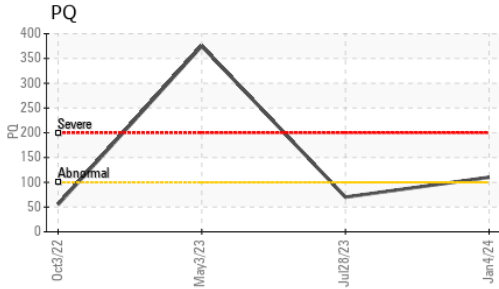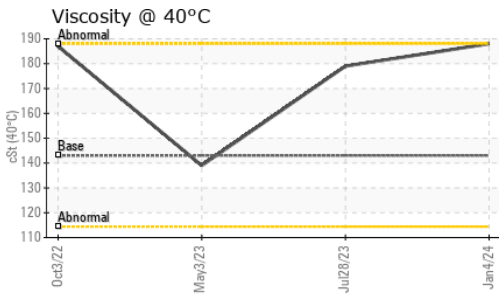

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0192905 **Received** : 12 Jan 2024
Lab Number : 06059468 **Diagnosed** : 15 Jan 2024
Unique Number : 10830850 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198