



WEAR	<b>SEVERE</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[LARABEE]**  
Machine Id  
**JOHN DEERE 225DX C257355 (S/N 1FF225DXTA0501599)**  
Component  
**Pump Drive**  
Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0165855</b>	JR0133220	---
Sample Date		Client Info		<b>25 Oct 2023</b>	09 Aug 2022	---
Machine Age	hrs	Client Info		<b>8125</b>	7809	---
Oil Age	hrs	Client Info		<b>0</b>	7809	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>SEVERE</b>	SEVERE	---

**WEAR**

Gear wear is indicated. The very high ferrous density (PQ) index indicates that severe wear is occurring.

PQ		ASTM D8184		<b>3062</b>	969	---
Iron	ppm	ASTM D5185m	>151	<b>1902</b>	1713	---
Chromium	ppm	ASTM D5185m	>11	<b>17</b>	18	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>21	<b>1</b>	6	---
Lead	ppm	ASTM D5185m	>51	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>51	<b>3</b>	1	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>6</b>	10	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185m	>51	<b>1</b>	<1	---
Boron	ppm	ASTM D5185m		<b>8</b>	7	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	3	---
Manganese	ppm	ASTM D5185m		<b>25</b>	13	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>24</b>	2	---
Phosphorus	ppm	ASTM D5185m		<b>1272</b>	49	---
Zinc	ppm	ASTM D5185m		<b>21</b>	0	---
Sulfur	ppm	ASTM D5185m		<b>15105</b>	5513	---
Visc @ 40°C	cSt	ASTM D445		<b>168</b>	124	---

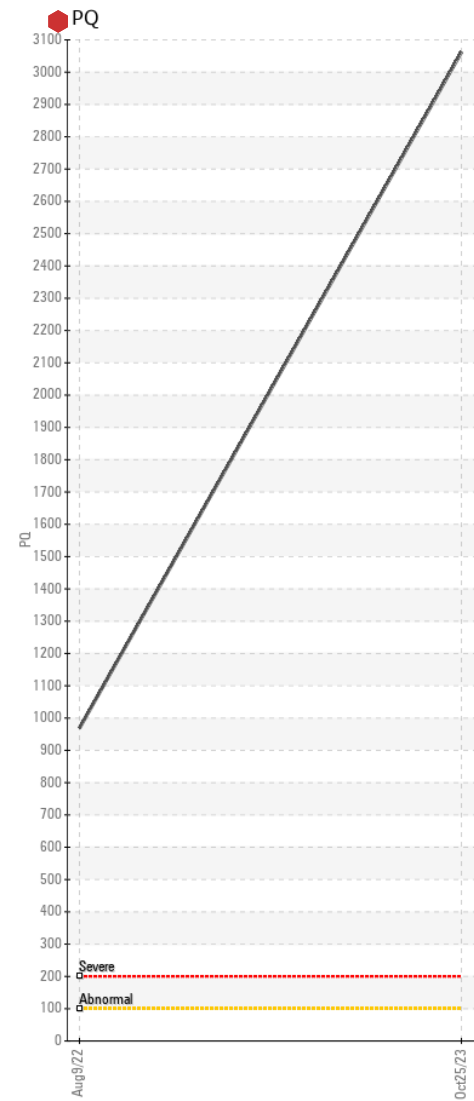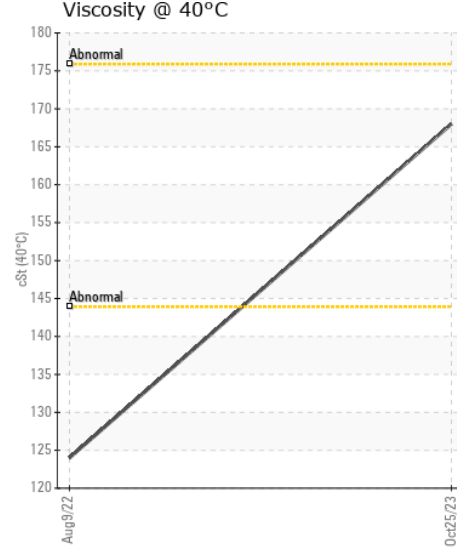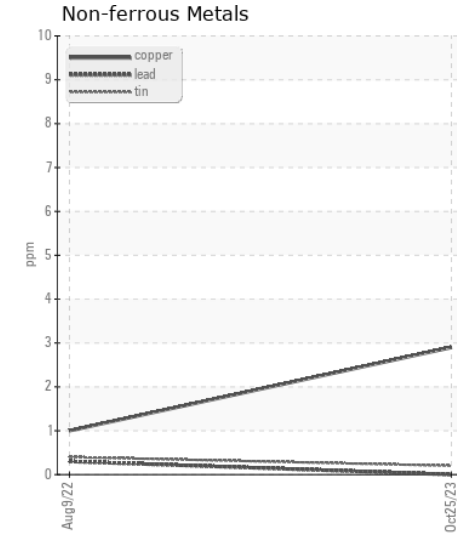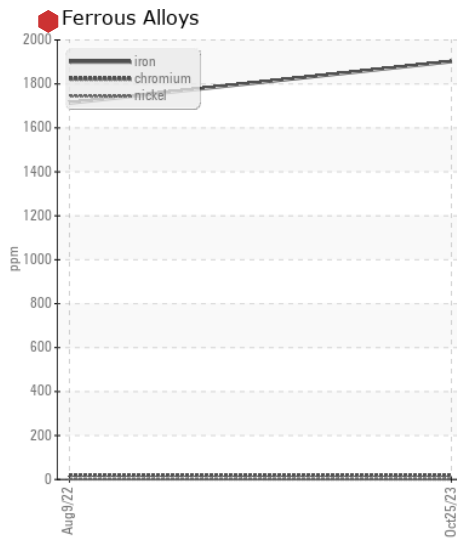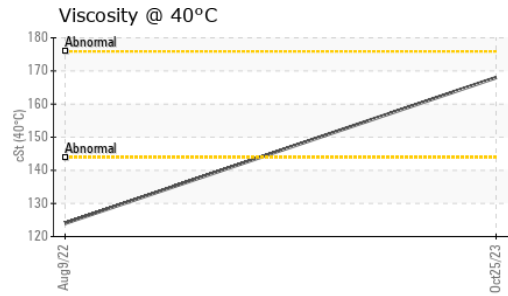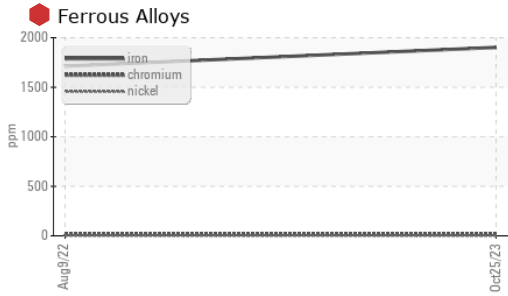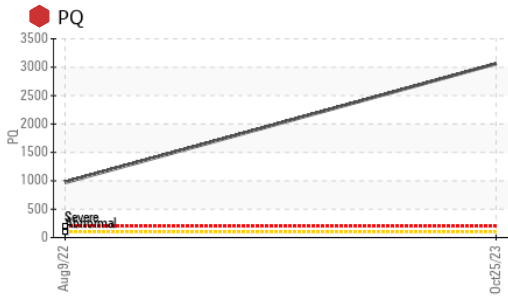

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0165855 **Received** : 12 Jan 2024  
**Lab Number** : 06059527 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10830909 **Diagnostician** : Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - ELIZABETH CITY**  
 129 KNOBBS CREEK DR  
 ELIZABETH CITY, NC  
 US 27909  
 Contact: CHARLES PARKER  
 charles.parker@jamesriverequipment.com  
 T: (252)333-2280  
 F: