



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[WO46747]
 Machine Id
EPIROC TMG22SED0499
 Component
Compressor
 Fluid
ATLAS COPCO PAROIL S (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0197641	JR0190506	JR0185969
Sample Date		Client Info		08 Jan 2024	31 Oct 2023	06 Sep 2023
Machine Age	hrs	Client Info		1272	1016	784
Oil Age	hrs	Client Info		0	1016	0
Filter Age	hrs	Client Info		0	1016	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		12	10	12
Iron	ppm	ASTM D5185m	>50	0	0	3
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	0	<1
Lead	ppm	ASTM D5185m	>65	0	0	<1
Copper	ppm	ASTM D5185m	>65	<1	0	0
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	1	8	8
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	<1	0
Boron	ppm	ASTM D5185m	0	<1	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	0	8	0	0
Calcium	ppm	ASTM D5185m	0	9	<1	0
Phosphorus	ppm	ASTM D5185m	100	42	15	28
Zinc	ppm	ASTM D5185m	0	49	3	0
Sulfur	ppm	ASTM D5185m	200	158	53	183
Visc @ 40°C	cSt	ASTM D445	46.0	49.5	61.5	61.2

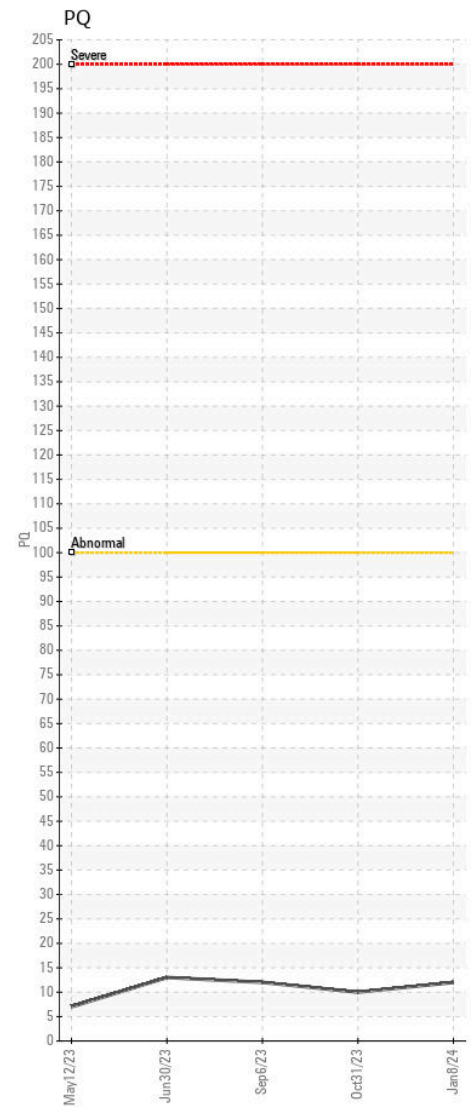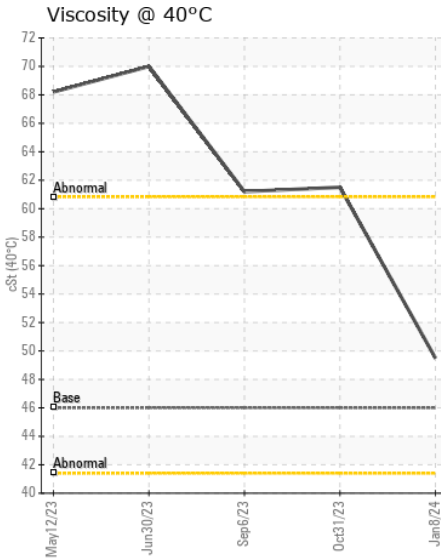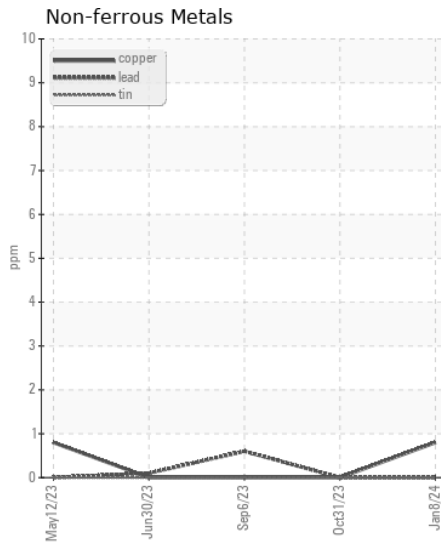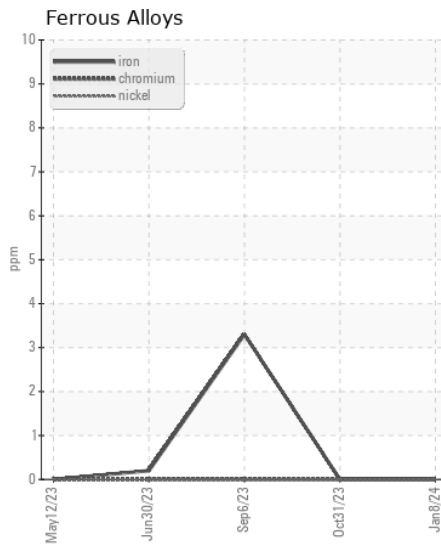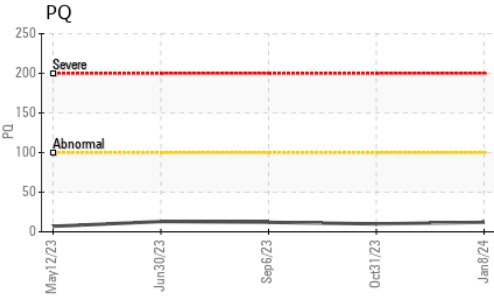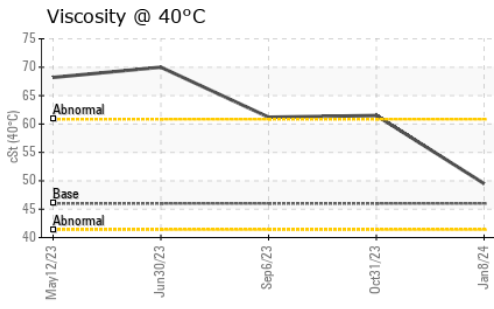

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0197641 **Received** : 12 Jan 2024
Lab Number : 06059555 **Diagnosed** : 15 Jan 2024
Unique Number : 10830937 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

WAKE STONE CORP
 6811 HWY 64 EAST
 KNIGHTDALE, NC
 US 27545
 Contact: PAUL SPRUILL
 paulspruill@wakestonecorp.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)