



ASCENDUM

OIL ANALYSIS REPORT



Area
Ascendum Machinery/500 Hour CSA
 Machine Id
VOLVO L70H 2169 (S/N 624365)
 Component
Transmission
 Fluid
{not provided} (--- GAL)

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0001647	---	---
Sample Date		Client Info		10 Jan 2024	---	---
Machine Age	hrs	Client Info		512	---	---
Oil Age	hrs	Client Info		512	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	79	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>50	6	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	8	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		78	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		101	---	---
Phosphorus	ppm	ASTM D5185m		206	---	---
Zinc	ppm	ASTM D5185m		36	---	---
Sulfur	ppm	ASTM D5185m		1966	---	---
Visc @ 40°C	cSt	ASTM D445		27.8	---	---

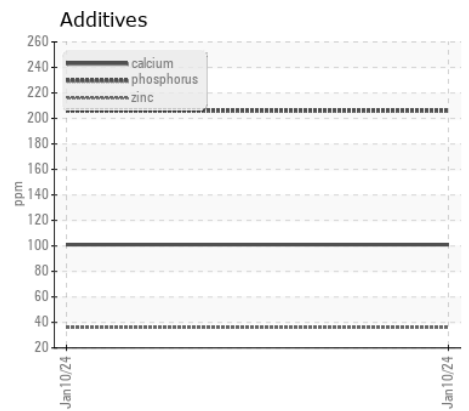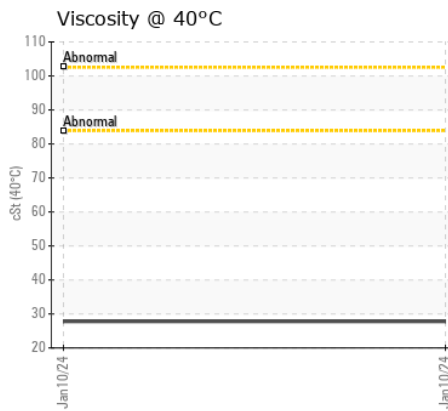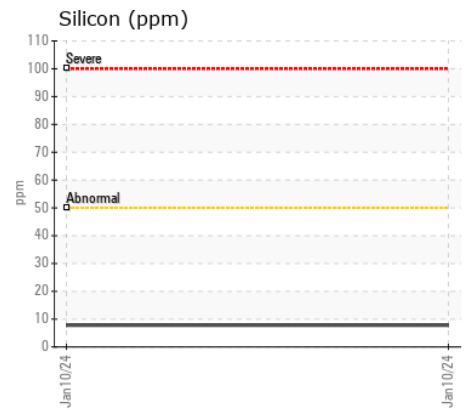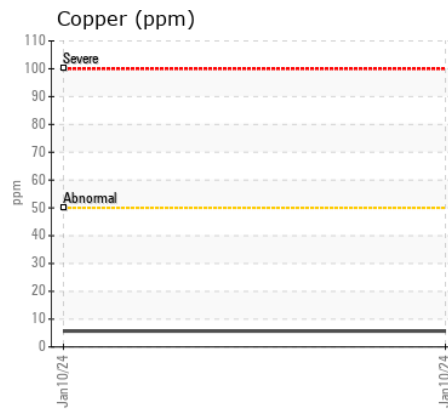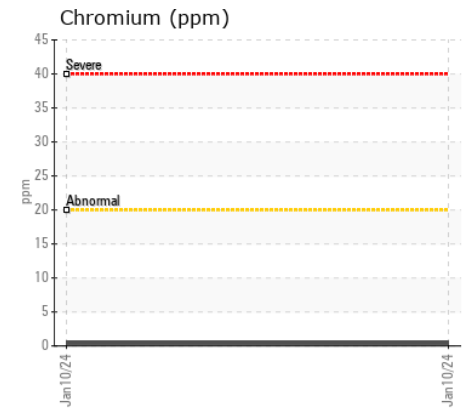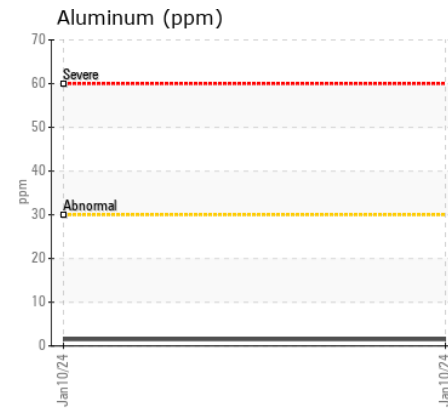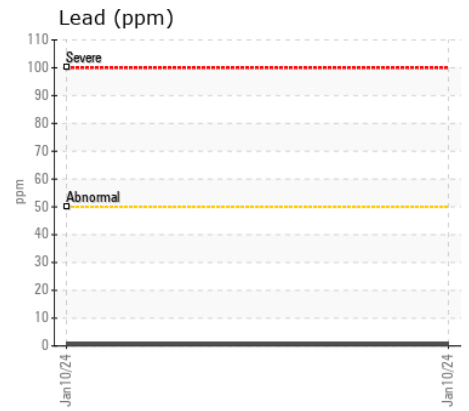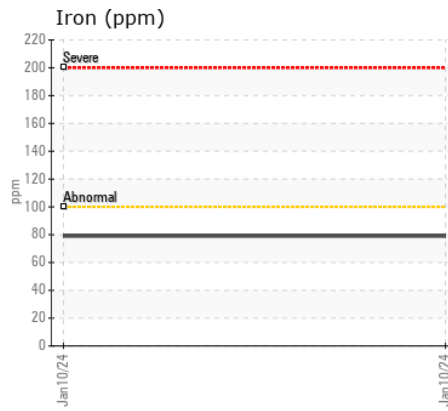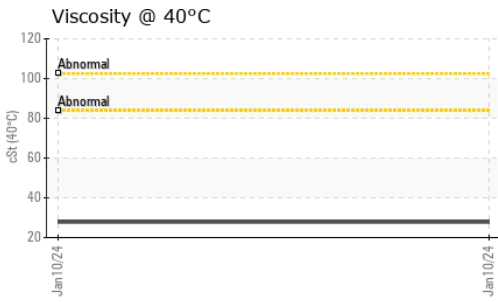

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0001647 **Recieved** : 12 Jan 2024
Lab Number : 06059644 **Diagnosed** : 16 Jan 2024
Unique Number : 10831026 **Diagnostician** : Jonathan Hester
Test Package : MOBCE

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216
 Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com
 T: (336)584-1745
 F: (336)584-0145

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)