



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
LIEBHERR L566 1484-43333
Component
Rear Right Wheel Hub
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|------------------|--------|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | LH0263653 | --- | --- |
| Sample Date | | Client Info | | 11 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 5062 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |
| Iron | ppm | ASTM D5185m | >500 | 40 | --- | --- |
| Chromium | ppm | ASTM D5185m | >8 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >5 | 2 | --- | --- |
| Lead | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | 10 | --- | --- |
| Tin | ppm | ASTM D5185m | | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | MODER | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Silicon | ppm | ASTM D5185m | >25 | 2 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Sodium | ppm | ASTM D5185m | | 0 | --- | --- |
| Boron | ppm | ASTM D5185m | | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | | 3 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 6 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 5 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 2421 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 5 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 31153 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | | 185 | --- | --- |

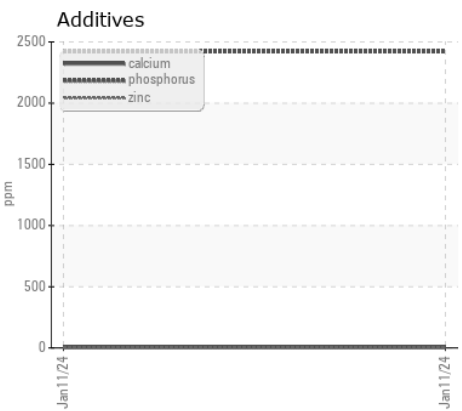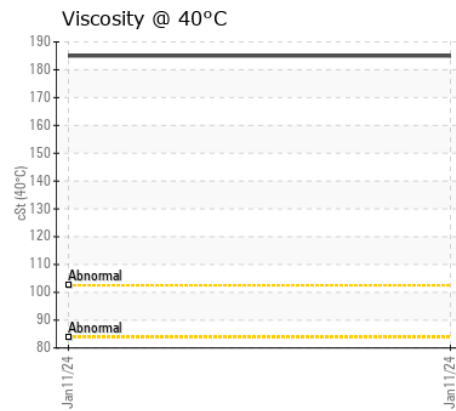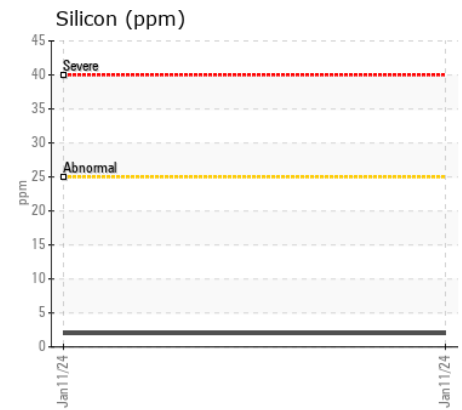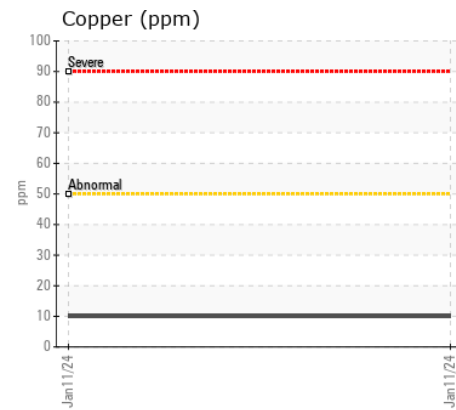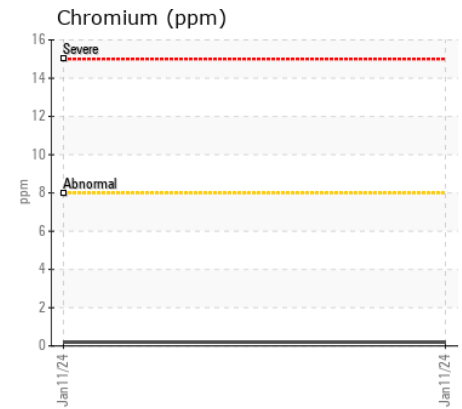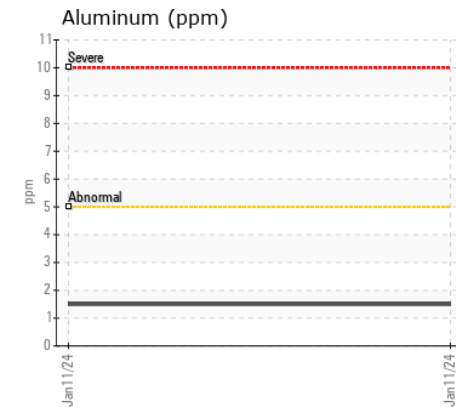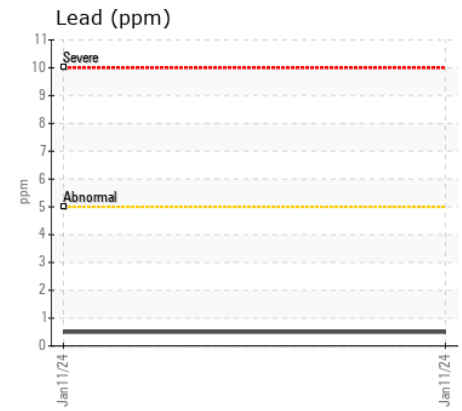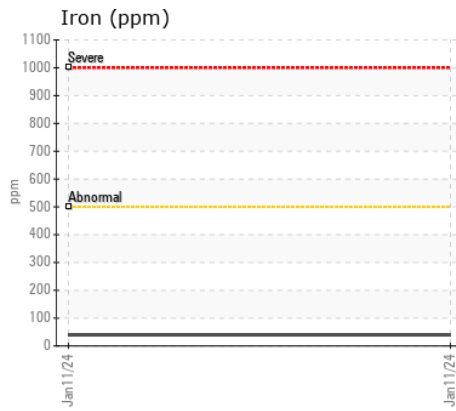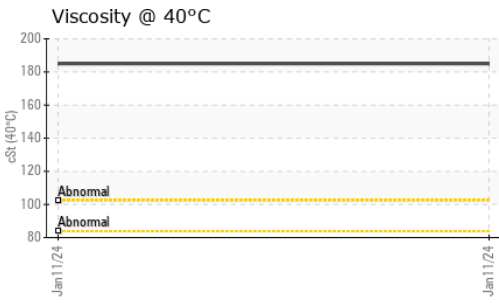

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0263653 **Received** : 12 Jan 2024
Lab Number : 06059646 **Diagnosed** : 16 Jan 2024
Unique Number : 10831028 **Diagnostician** : Jonathan Hester
Test Package : MOBCE

FINKBINER EQUIPMENT
 3501 N. MAIN ST
 EAST PEORIA, IL
 US 61611
 Contact: Mike Plummer
 mplummer@finkbiner.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: