



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR L566 1484-60217**  
Component  
**Transmission (Manual)**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 10W Tractor TDH Fluid. Please confirm the fluid type and grade, and specify the brand of the fluid on your next sample.

### WEAR

All component wear rates are normal.










### CONTAMINATION

There is no indication of any contamination in the fluid.

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0263749</b>	LH0263727	---
Sample Date		Client Info		<b>11 Jan 2024</b>	18 Apr 2023	---
Machine Age	hrs	Client Info		<b>5070</b>	3000	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>200	<b>6</b>	10	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>7	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>225	<b>2</b>	3	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>125	<b>8</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>0</b>	2	---
Boron	ppm	ASTM D5185m		<b>110</b>	2	---
Barium	ppm	ASTM D5185m		<b>3</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>8</b>	8	---
Calcium	ppm	ASTM D5185m		<b>3589</b>	3074	---
Phosphorus	ppm	ASTM D5185m		<b>1169</b>	1148	---
Zinc	ppm	ASTM D5185m		<b>1482</b>	1365	---
Sulfur	ppm	ASTM D5185m		<b>4598</b>	9615	---
Visc @ 40°C	cSt	ASTM D445		<b>50.0</b>	49.5	---

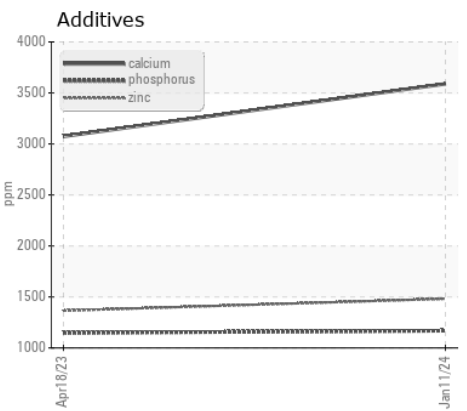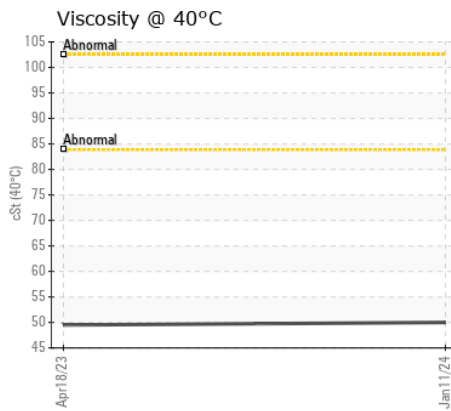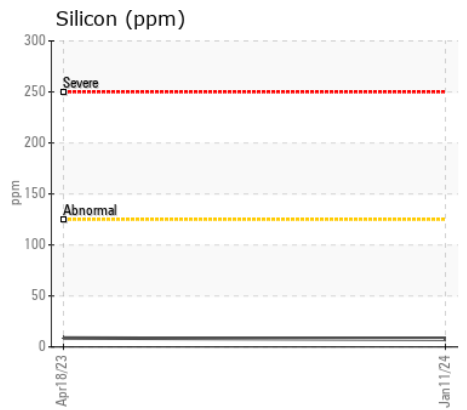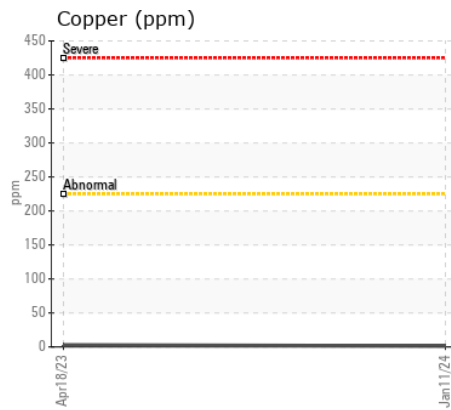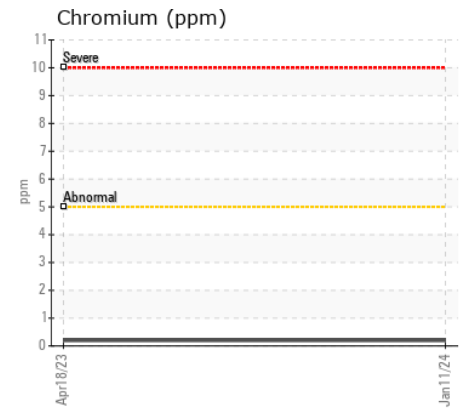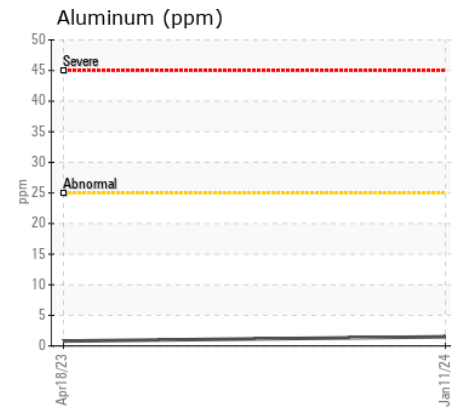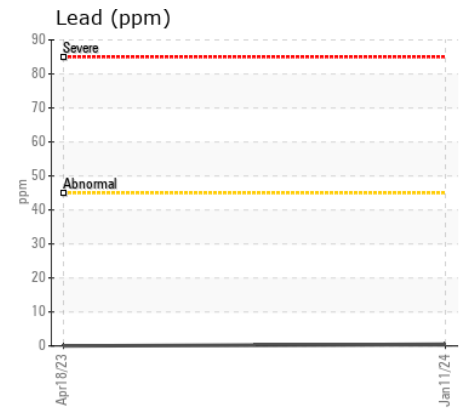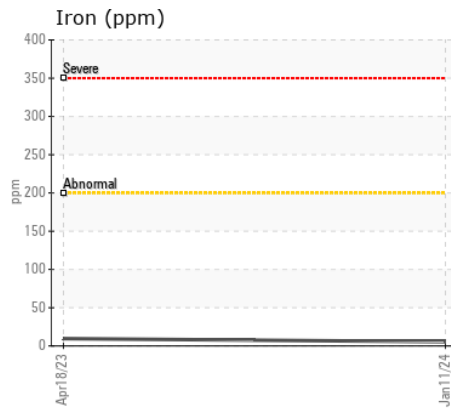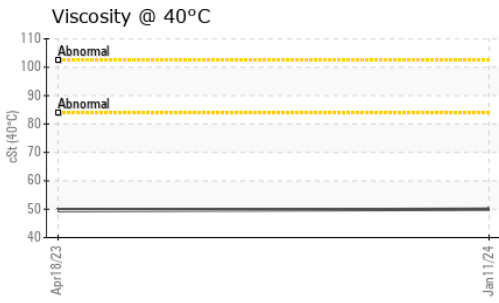

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LH0263749 **Received** : 12 Jan 2024  
**Lab Number** : 06059701 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831083 **Diagnostician** : Wes Davis  
**Test Package** : MOBCE

**MR BULTS INC**  
 2627 E 139TH ST  
 BURNHAM, IL  
 US 60633

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (708)868-0059

F: