



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DT37
 Component
Transmission (Auto)
 Fluid
COGNIS EMGARD 2805 ATF (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0114723	PCA0098172	PCA0058903
Sample Date		Client Info		10 Jan 2024	20 Jun 2023	06 Oct 2021
Machine Age	mls	Client Info		156244	129400	75986
Oil Age	mls	Client Info		0	75000	75000
Filter Age	mls	Client Info		0	75000	75000
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	89	77	104
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	20	21	21
Lead	ppm	ASTM D5185m	>50	46	48	25
Copper	ppm	ASTM D5185m	>225	28	32	8
Tin	ppm	ASTM D5185m	>10	3	2	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	6	6	4
Potassium	ppm	ASTM D5185m	>20	3	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	4	4
Boron	ppm	ASTM D5185m		214	236	96
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		154	156	29
Phosphorus	ppm	ASTM D5185m		457	519	243
Zinc	ppm	ASTM D5185m		0	<1	3
Sulfur	ppm	ASTM D5185m		2780	2833	560
Visc @ 40°C	cSt	ASTM D445	38.9	33.4	34.9	37.7

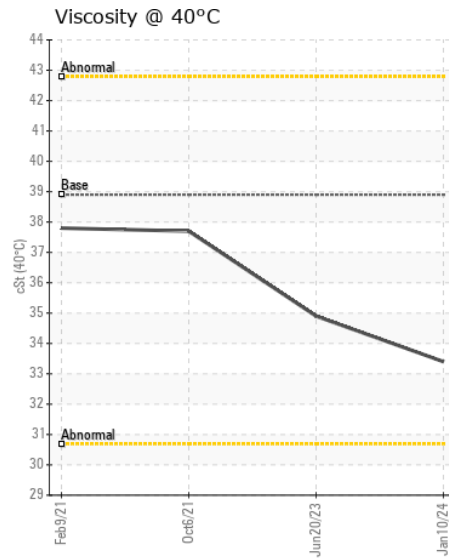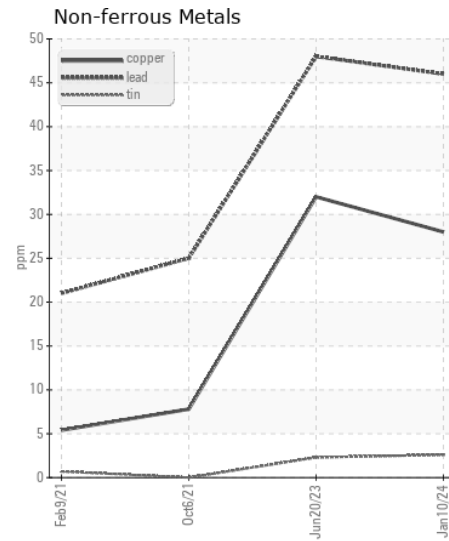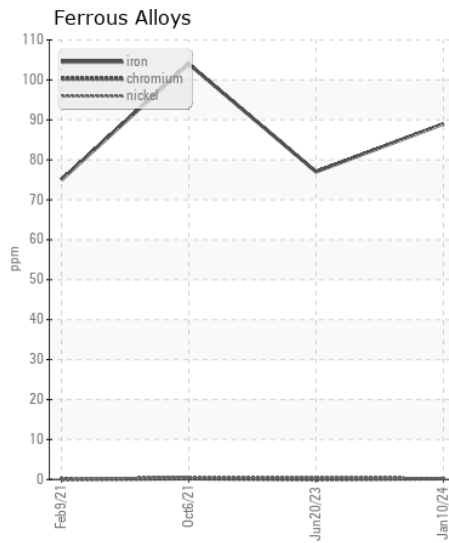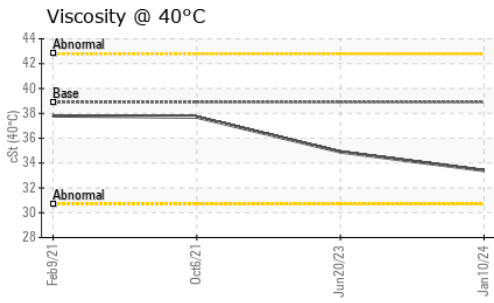

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114723 **Received** : 12 Jan 2024
Lab Number : 06059708 **Diagnosed** : 16 Jan 2024
Unique Number : 10831090 **Diagnostician** : Wes Davis
Test Package : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

HK STEEL INC
 400 N PARSON ST
 WEST COLUMBIA, SC
 US 29169

Contact: GEORGE EDWARDS
gedwards@nwwhite.com

T:
F: