



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWO-068706]
 Machine Id
VOLVO A45G 352134
 Component
Transmission (Auto)
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP435643	VCP431053	VCP431975
Sample Date		Client Info		04 Jan 2024	22 Nov 2023	26 Sep 2023
Machine Age	hrs	Client Info		8960	8724	8228
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	10	7	16
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	5	3	6
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	2	2	8
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>225	27	19	37
Tin	ppm	ASTM D5185m	>10	3	2	5
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	2	2	2
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	3
Boron	ppm	ASTM D5185m		109	86	84
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		3	2	1
Calcium	ppm	ASTM D5185m		78	79	86
Phosphorus	ppm	ASTM D5185m		198	198	174
Zinc	ppm	ASTM D5185m		0	7	<1
Sulfur	ppm	ASTM D5185m		1886	1920	1889
Visc @ 40°C	cSt	ASTM D445		28.2	28.4	27.7

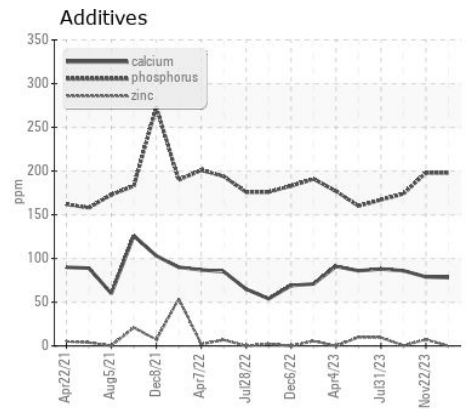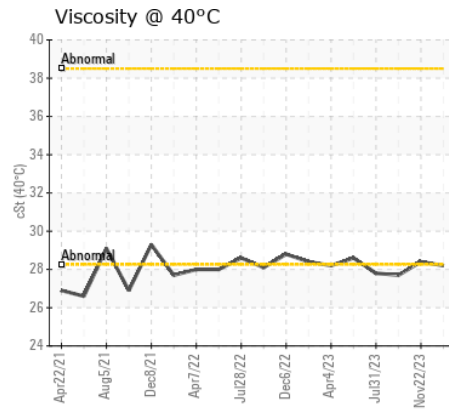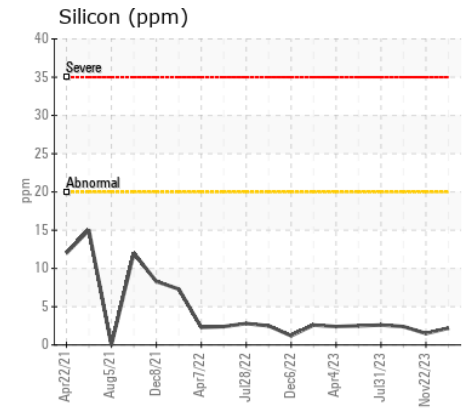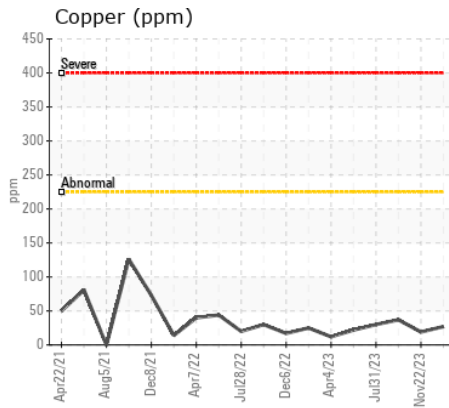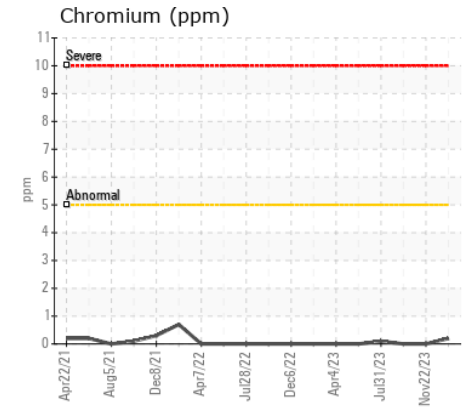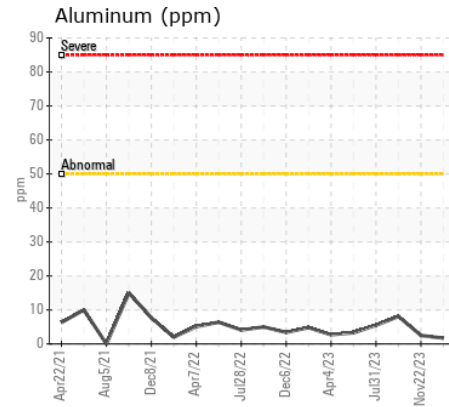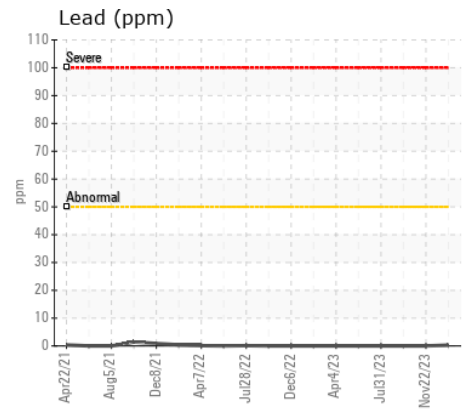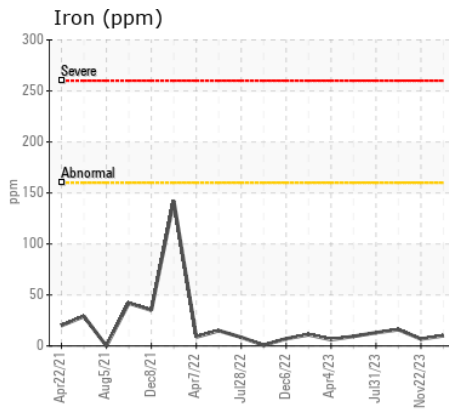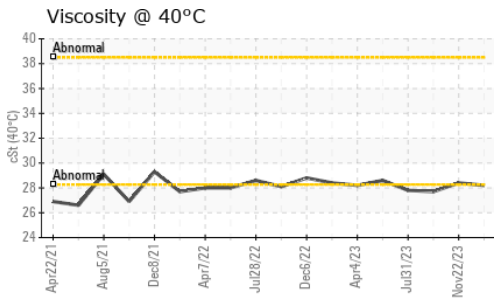

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP435643 **Received** : 12 Jan 2024
Lab Number : 06059713 **Diagnosed** : 16 Jan 2024
Unique Number : 10831095 **Diagnostician** : Don Baldrige
Test Package : MOB 1

SAIIA CONSTRUCTION LLC
 4400 LEWISBURG RD
 BIRMINGHAM, AL
 US 35207

Contact: STEPHANI BRITTON
 sbritton@saiaa.com; doug.bogart@wearcheck.com
 T: (205)943-2268
 F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)