


WEAR CONTAMINATION **FLUID CONDITION** **NORMAL NORMAL NORMAL**

Machine Id

1706

Component

Component Diesel Engine							
DIESEL ENGINE OIL SAE 15W40 (QTS)							
	· · · ·						
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Number		Client Info		WC0870679	WC0743108	WC0527409
	Sample Date	mlo	Client Info		29 Nov 2023	20 Sep 2022 54146	19 Nov 2020
	Machine Age	mls	Client Info		79816 0		191193
	Oil Age Filter Age	mls	Client Info		0	0	0
	Oil Changed	mls	Client Info		Not Changd	Not Changd	Not Changd
	Filter Changed		Client Info		Changed	Not Change	Not Changd
	Sample Status		Olletti IIIIO		NORMAL	NORMAL	NORMAL
					·····		
WEAR	Iron	ppm	ASTM D5185m	>100	12	14	22
All	Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
All component wear rates are normal.	Nickel	ppm	ASTM D5185m	>4	<1	0	<1
	Titanium	ppm	ASTM D5185m		0	0	<1
	Silver	ppm	ASTM D5185m	>3	0	0	0
	Aluminum	ppm	ASTM D5185m	>20	8	9	18
	Lead	ppm	ASTM D5185m	>40	0	0	0
	Copper	ppm	ASTM D5185m	>330	2	<1	14
	Tin	ppm	ASTM D5185m	>15	<1	<1	0
	Vanadium	ppm	ASTM D5185m		0	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	6	5	12
Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.	Potassium	ppm	ASTM D5185m		15	16	37
	Fuel	ррпп	WC Method		<1.0	<1.0	<1.0
	Water		WC Method		NEG	NEG	NEG
	Glycol		WC Method	70.L	NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.3	0.4	0.2
	Nitration	Abs/cm	*ASTM D7624	>20	9.7	10.5	10.2
	Sulfation	Abs/.1mm	*ASTM D7415		19.1	21.6	20.5
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
EL LUD CONDITION	0"		AOTHADE (CE	450			
FLUID CONDITION	Sodium	ppm	ASTM D5185m		2	<1	4
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Boron	ppm	ASTM D5185m		34	16	46
	Barium	ppm	ASTM D5185m		4	2	<1
	Molybdenum	ppm	ASTM D5185m	100	77	58	78
	Manganese Magnesium	ppm	ASTM D5185m	150	<1 154	<1	1
	Calcium	ppm	ASTM D5185m ASTM D5185m		154 1867	99 2141	96 2217
	Phosphorus	ppm	ASTM D5185m		998	940	1042
	Zinc	ppm	ASTM D5185m		1160	1156	1185
	Sulfur	ppm	ASTM D5185m		3690	4193	2884
	Oxidation	Abs/.1mm	*ASTM D3163111		15.2	16.4	17.3
	Base Number (BN)				6.8	6.5	7
	Visc @ 100°C	cSt	ASTM D2030		13.1	13.4	13.3
	1.00 @ 100 0	001	. 10 1111 0 170		.3.1		. 0.0

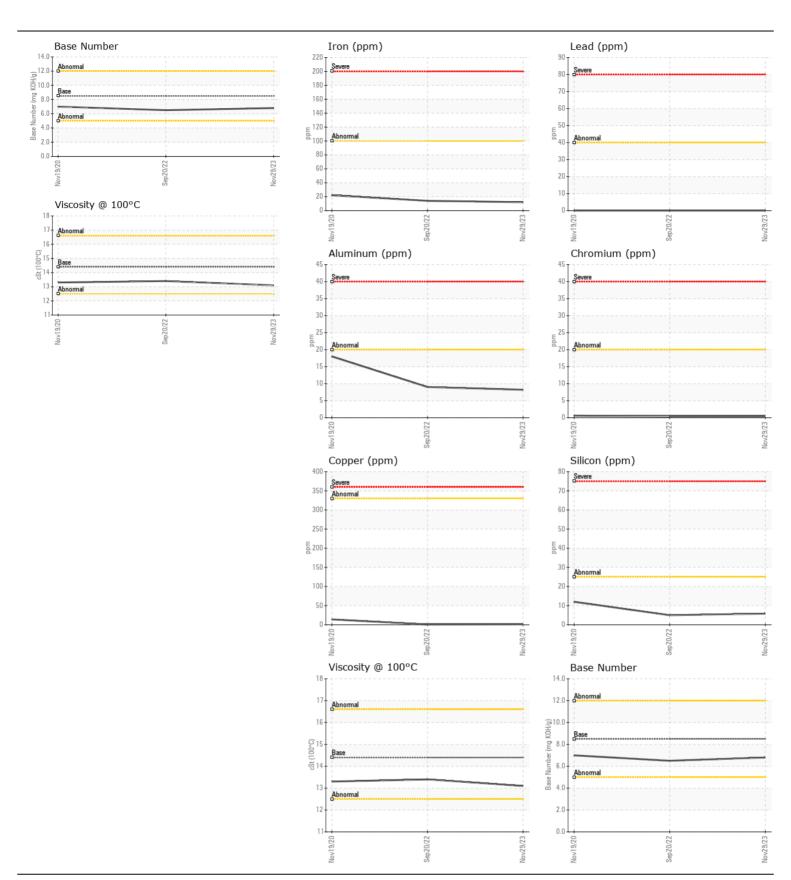



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0870679 : 06059795 : 10831177

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved : 12 Jan 2024 : 15 Jan 2024

Diagnosed Diagnostician : Wes Davis

Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. WAKE COUNTY PUBLIC SCHOOL SYSTEM

1551 ROCK QUARRY ROAD RALEIGH, NC US 27610

Contact: DEVIN WEBER dweber@wcpss.net T: (919)856-8076

F: x:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)