



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1691**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0870715</b>	WC0821347	WC0772850
Sample Date		Client Info		<b>07 Dec 2023</b>	14 Jul 2023	03 Jan 2023
Machine Age	mls	Client Info		<b>64377</b>	54149	40398
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>22</b>	7	46
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	6	13
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	4
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	4	9
Potassium	ppm	ASTM D5185m	>20	<b>24</b>	7	20
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.1</b>	0.2	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	8.3	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.5</b>	18.0	23.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>14</b>	2	3
Boron	ppm	ASTM D5185m	250	<b>48</b>	43	29
Barium	ppm	ASTM D5185m	10	<b>3</b>	0	2
Molybdenum	ppm	ASTM D5185m	100	<b>74</b>	82	83
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>132</b>	139	19
Calcium	ppm	ASTM D5185m	3000	<b>1803</b>	2223	2178
Phosphorus	ppm	ASTM D5185m	1150	<b>898</b>	1050	881
Zinc	ppm	ASTM D5185m	1350	<b>1062</b>	1246	1118
Sulfur	ppm	ASTM D5185m	4250	<b>3406</b>	4284	4198
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.3</b>	13.9	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.6</b>	7.5	5.3
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.2</b>	13.4	13.2

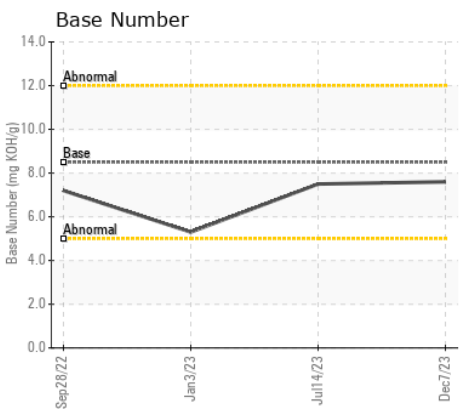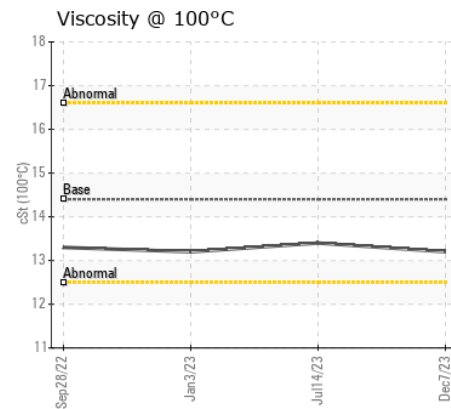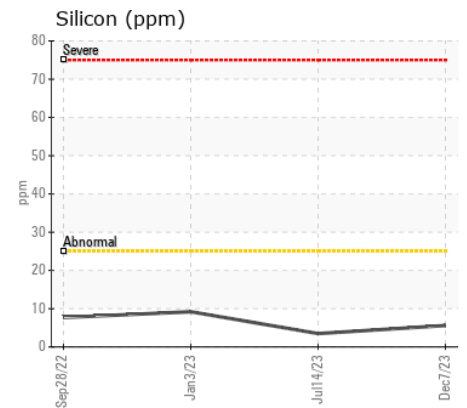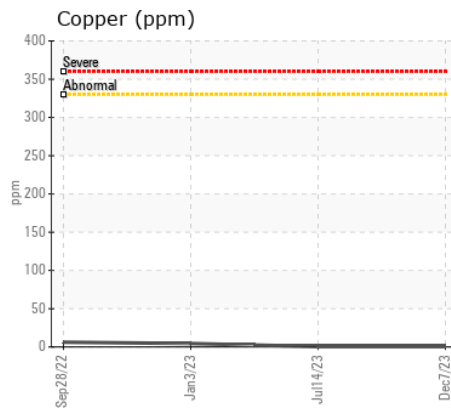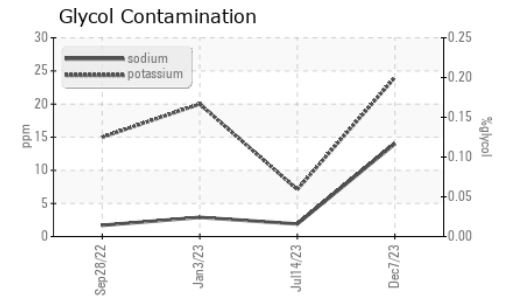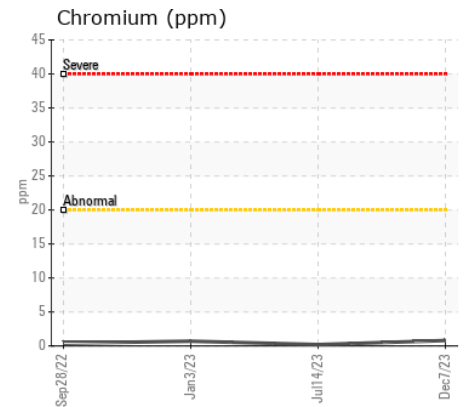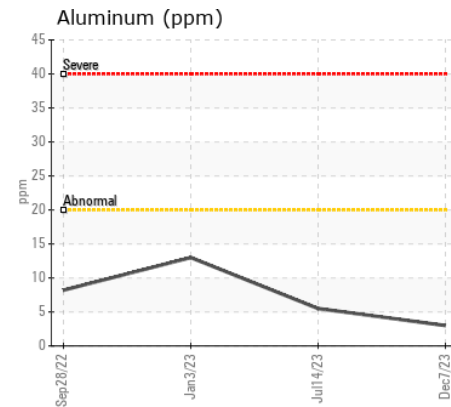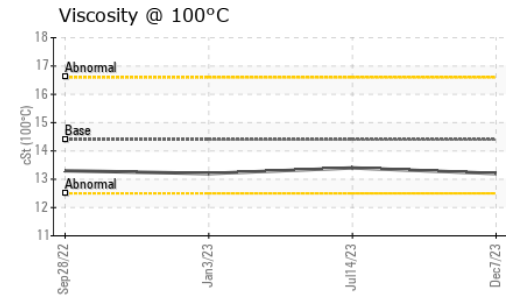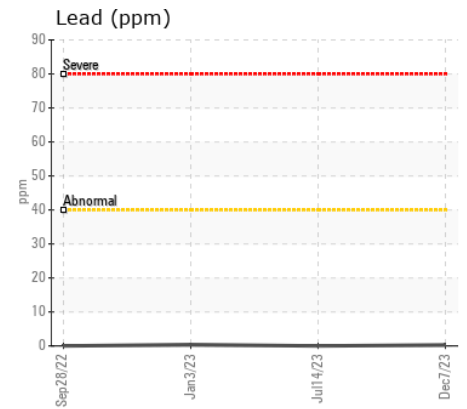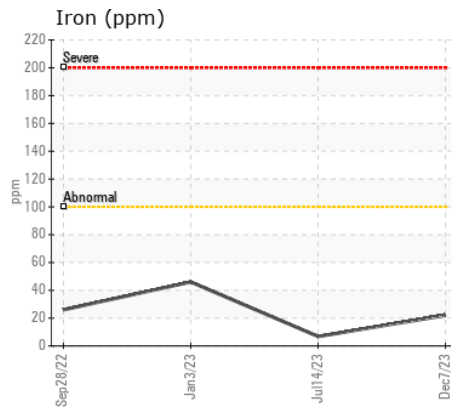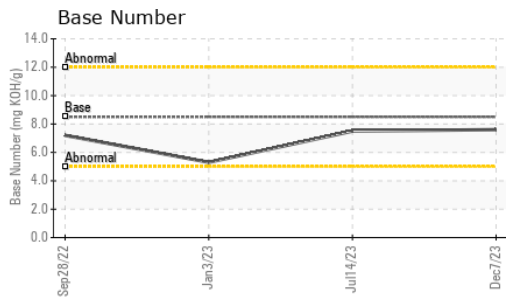

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0870715 **Received** : 12 Jan 2024  
**Lab Number** : 06059813 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831195 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: Glycol, TBN )

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610  
 Contact: DEVIN WEBER  
 dweber@wcpss.net  
 T: (919)856-8076  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)