



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1729**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0870834</b>	WC0792897	WC0761187
Sample Date		Client Info		<b>04 Dec 2023</b>	15 Mar 2023	15 Dec 2022
Machine Age	mls	Client Info		<b>54252</b>	39349	34371
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	31	12
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	11	7
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	8	6
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	16	10
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	11.5	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.4</b>	23.5	18.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	3
Boron	ppm	ASTM D5185m	250	<b>38</b>	22	39
Barium	ppm	ASTM D5185m	10	<b>4</b>	0	1
Molybdenum	ppm	ASTM D5185m	100	<b>84</b>	81	78
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>103</b>	46	40
Calcium	ppm	ASTM D5185m	3000	<b>1941</b>	2250	2015
Phosphorus	ppm	ASTM D5185m	1150	<b>929</b>	933	940
Zinc	ppm	ASTM D5185m	1350	<b>1157</b>	1225	1136
Sulfur	ppm	ASTM D5185m	4250	<b>3396</b>	4063	3528
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	18.4	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.4</b>	5.0	6.8
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.0</b>	12.6	13.4

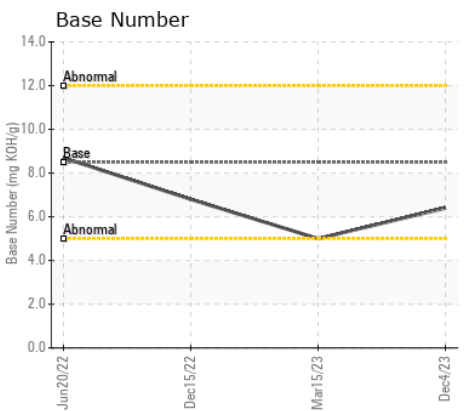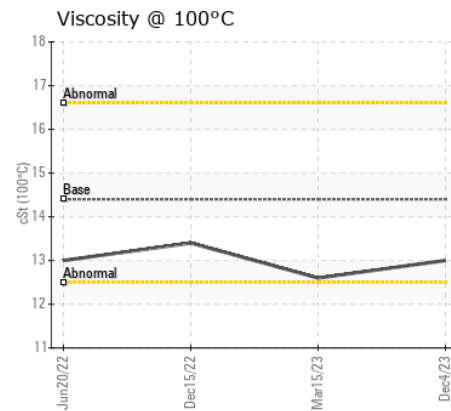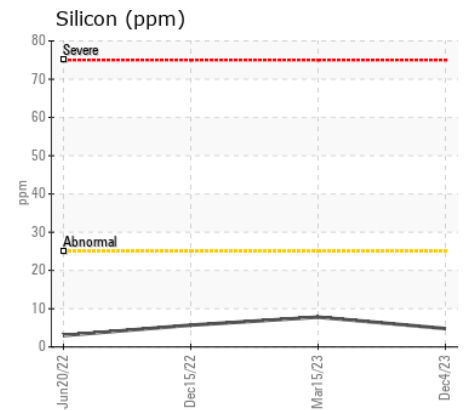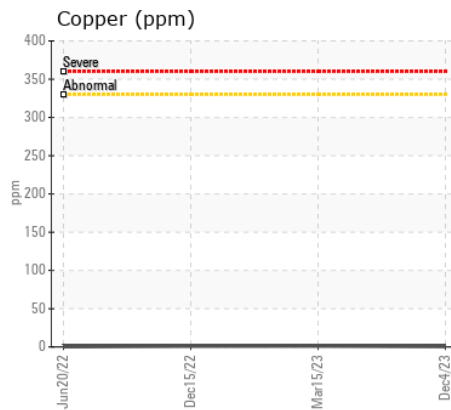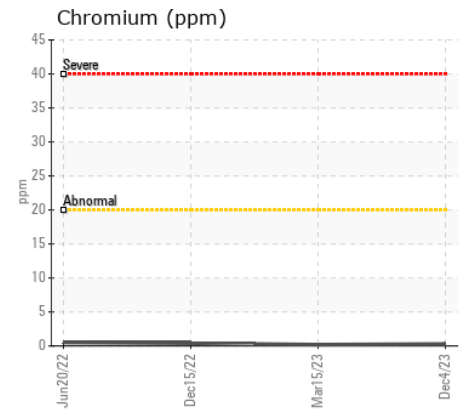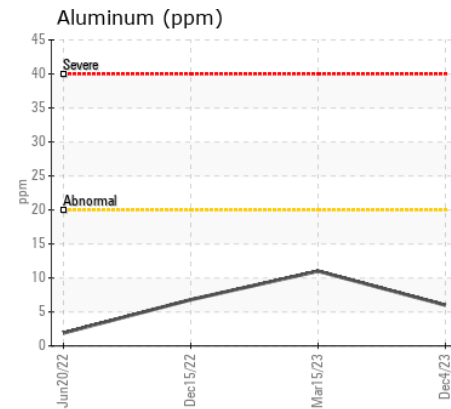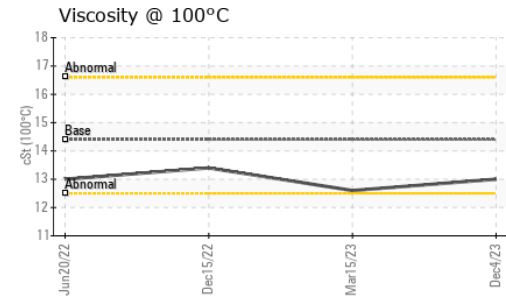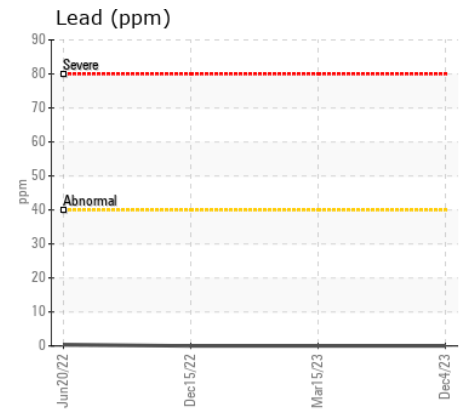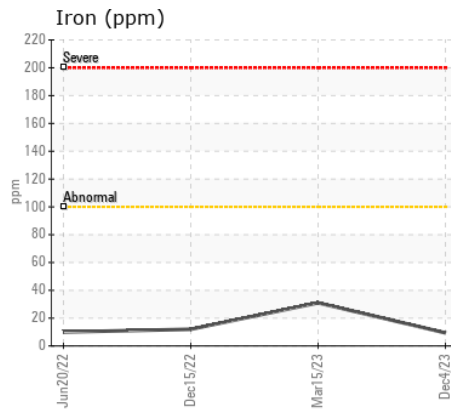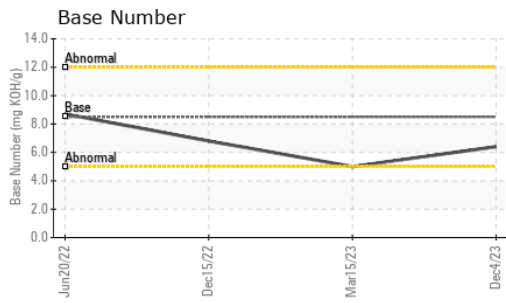

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0870834 **Received** : 12 Jan 2024  
**Lab Number** : 06059854 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10831236 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610

Contact: DEVIN WEBER

dweber@wcpss.net

T: (919)856-8076

F: x: