



OIL ANALYSIS REPORT

| | |
|-----------------|-----------------|
| WEAR | ABNORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
1785
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | WC0870678 | WC0706369 | --- |
| Sample Date | | Client Info | | 04 Jan 2024 | 06 Jun 2022 | --- |
| Machine Age | mls | Client Info | | 53239 | 15154 | --- |
| Oil Age | mls | Client Info | | 0 | 0 | --- |
| Filter Age | mls | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | Not Changd | Not Changd | --- |
| Sample Status | | | | ABNORMAL | NORMAL | --- |

WEAR

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|-----|
| Iron | ppm | ASTM D5185m | >100 | ▲ 127 | 5 | --- |
| Chromium | ppm | ASTM D5185m | >20 | 4 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >4 | <1 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | <1 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 43 | 2 | --- |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | --- |
| Copper | ppm | ASTM D5185m | >330 | 5 | 1 | --- |
| Tin | ppm | ASTM D5185m | >15 | 1 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >25 | 12 | 4 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 86 | 2 | --- |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | --- |
| Water | | WC Method | >0.2 | NEG | NEG | --- |
| Glycol | | WC Method | | NEG | NEG | --- |
| Soot % | % | *ASTM D7844 | >3 | 1.6 | 0.1 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 14.9 | 6.7 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 32.8 | 19.0 | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|-----|
| Sodium | ppm | ASTM D5185m | >158 | 4 | 2 | --- |
| Boron | ppm | ASTM D5185m | 250 | 10 | 44 | --- |
| Barium | ppm | ASTM D5185m | 10 | 4 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 76 | 53 | --- |
| Manganese | ppm | ASTM D5185m | | 2 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 111 | 95 | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 2001 | 2063 | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 892 | 971 | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 1158 | 1176 | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 3270 | 3755 | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 28.3 | 14.9 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 4.1 | 6.9 | --- |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 12.6 | 13.3 | --- |


▲ Ferrous Alloys

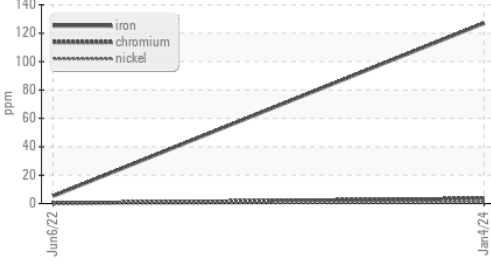


▲ Iron (ppm)

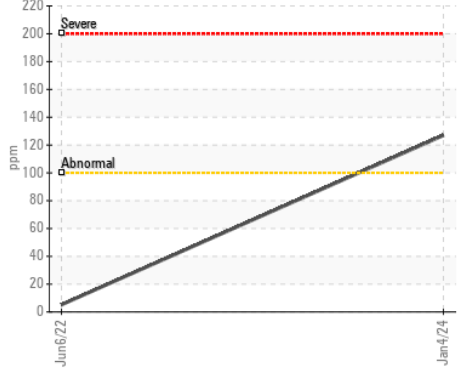


Lead (ppm)

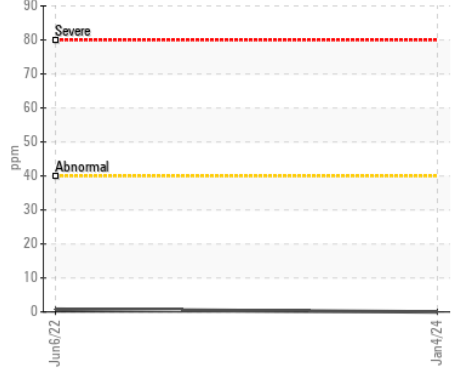


Glycol Contamination

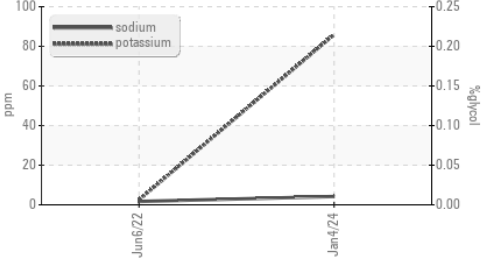


Aluminum (ppm)

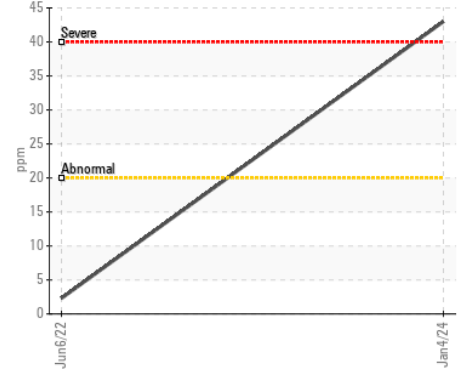


Chromium (ppm)

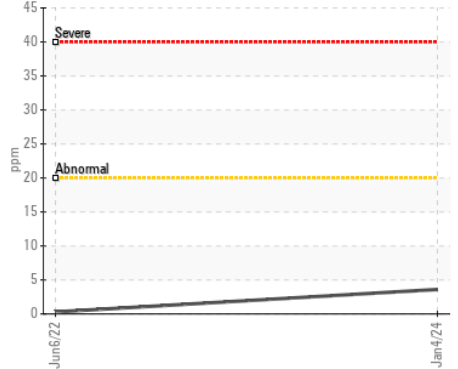


Base Number

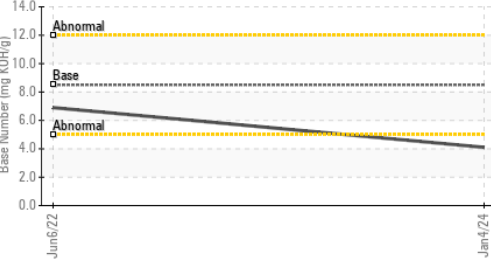


Copper (ppm)

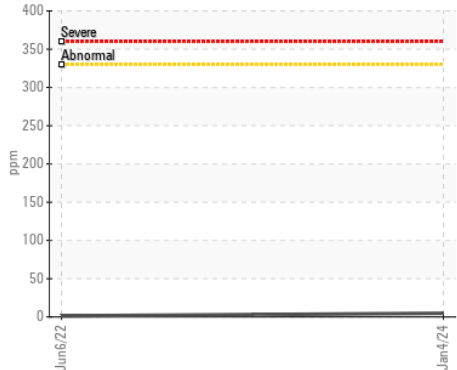


Silicon (ppm)

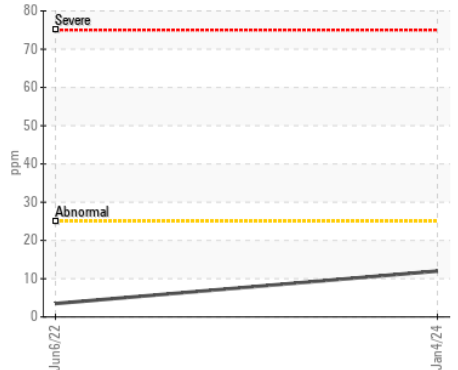


Viscosity @ 100°C

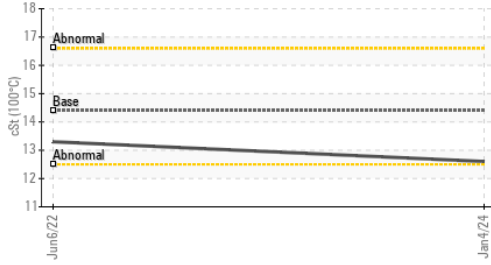



Viscosity @ 100°C

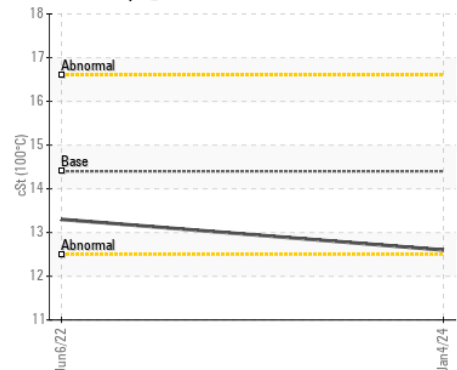

Base Number

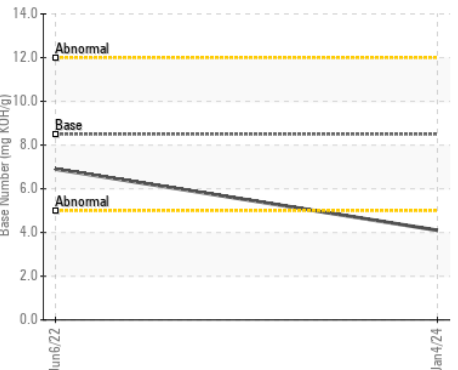

Aluminum (ppm)

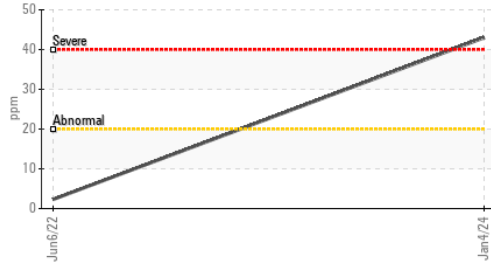

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0870678 **Received** : 12 Jan 2024
Lab Number : 06059876 **Diagnosed** : 16 Jan 2024
Unique Number : 10831258 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)