



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1025R 1LV1025RPFH310738

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0158851	JR0129630	JRMC468953
Sample Date		Client Info		11 Jan 2024	13 Jan 2023	28 Mar 2019
Machine Age	hrs	Client Info		362	315	116
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	2	3	7
Chromium	ppm	ASTM D5185m	>11	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	1	0
Aluminum	ppm	ASTM D5185m	>31	2	2	5
Lead	ppm	ASTM D5185m	>26	0	1	<1
Copper	ppm	ASTM D5185m	>26	<1	<1	2
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	8	6	10
Potassium	ppm	ASTM D5185m	>20	2	2	0
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.3	5.7	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	19.0	20.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	1	0	3
Boron	ppm	ASTM D5185m		265	268	243
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		238	231	272
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		848	828	921
Calcium	ppm	ASTM D5185m		1423	1521	1540
Phosphorus	ppm	ASTM D5185m		902	885	893
Zinc	ppm	ASTM D5185m		1101	1105	1041
Sulfur	ppm	ASTM D5185m		3206	3343	2667
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	13.7	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.7	9.6	9.2
Visc @ 100°C	cSt	ASTM D445	15.4	14.8	14.6	14.67

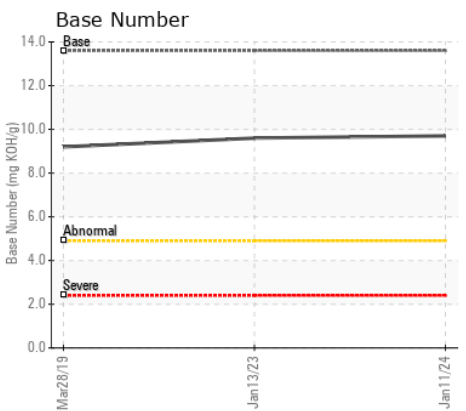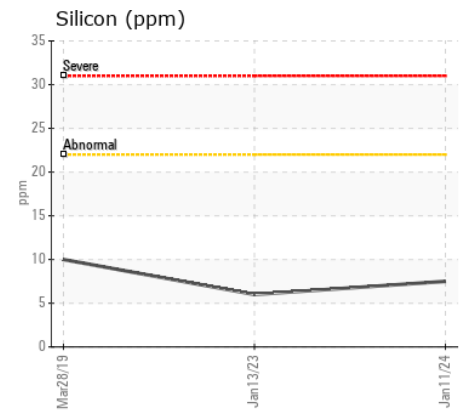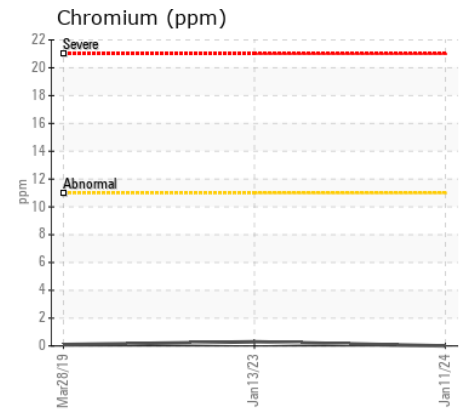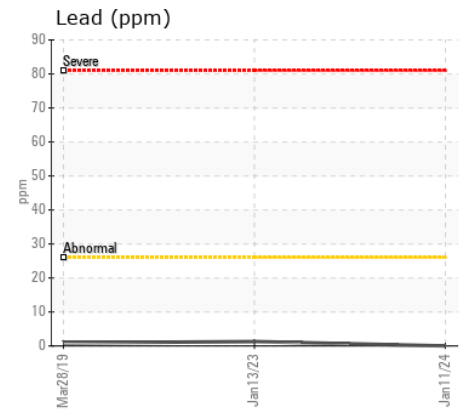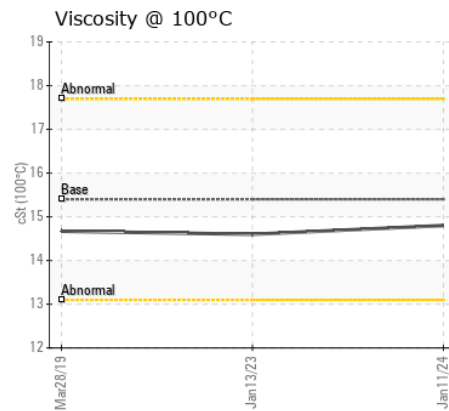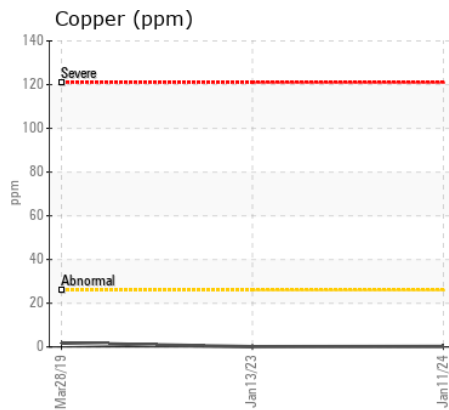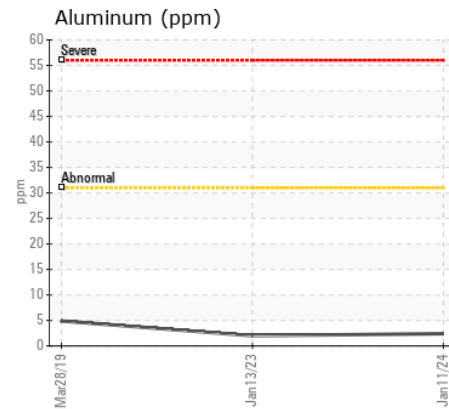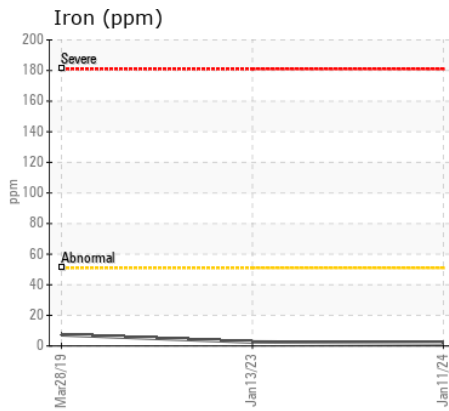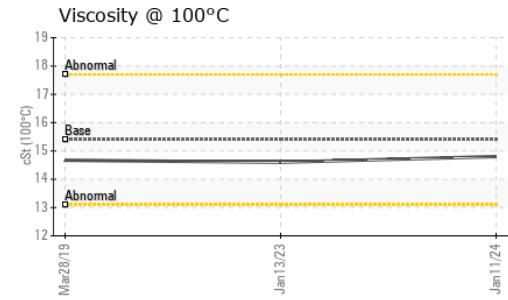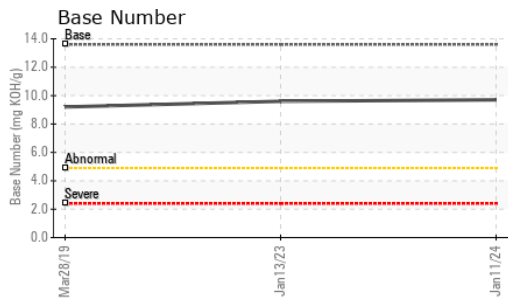

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0158851 **Received** : 12 Jan 2024
Lab Number : 06060037 **Diagnosed** : 15 Jan 2024
Unique Number : 10831419 **Diagnostician** : Wes Davis
Test Package : MOBCE (Additional Tests: TBN)

JRE - FISHERSVILLE
 98 EXPO ROAD
 FISHERSVILLE, VA
 US 22939
 Contact: MIKE JENKINS
 MIKE.JENKINS@JAMESRIVEREQUIPMENT.COM
 T: (540)292-3494
 F: (540)337-1495

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)