



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

[CSX]

Machine Id

JOHN DEERE 35G 1FF035GXENK297551

Component

Diesel Engine

Fluid

{not provided} (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0184760	---	---
Sample Date		Client Info		27 Dec 2023	---	---
Machine Age	hrs	Client Info		120	---	---
Oil Age	hrs	Client Info		120	---	---
Filter Age	hrs	Client Info		120	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	27	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	5	---	---
Lead	ppm	ASTM D5185m	>26	3	---	---
Copper	ppm	ASTM D5185m	>26	14	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.


Silicon	ppm	ASTM D5185m	>22	▲ 62	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel	%	ASTM D3524	>2.1	2.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	18	---	---
Boron	ppm	ASTM D5185m		53	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		113	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		21	---	---
Calcium	ppm	ASTM D5185m		4058	---	---
Phosphorus	ppm	ASTM D5185m		1126	---	---
Zinc	ppm	ASTM D5185m		1336	---	---
Sulfur	ppm	ASTM D5185m		6676	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		12.1	---	---
Visc @ 100°C	cSt	ASTM D445		9.6	---	---


▲ Silicon (ppm)

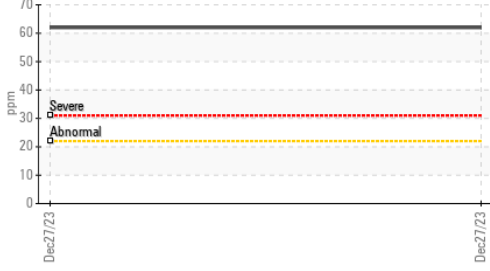


Ferrous Alloys

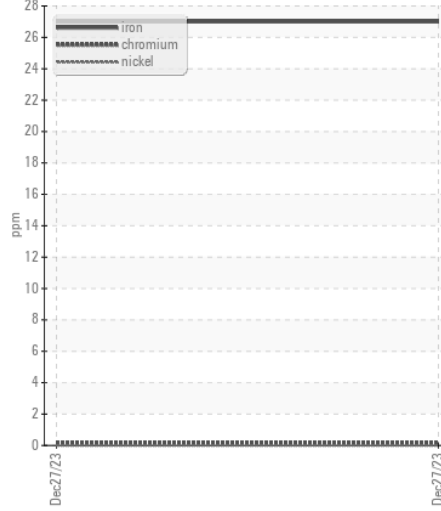


Fuel Dilution

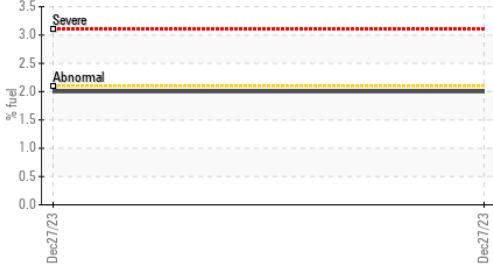


Non-ferrous Metals

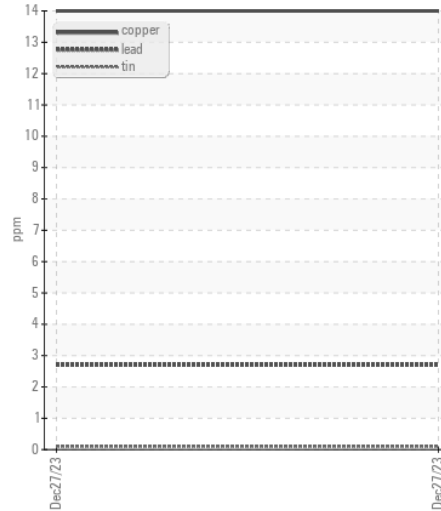


Base Number

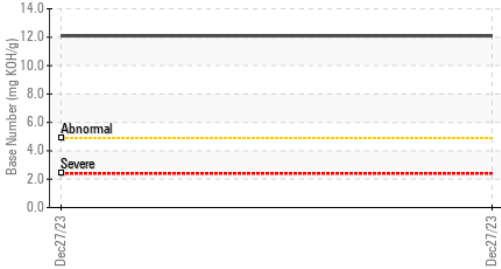


Viscosity @ 100°C

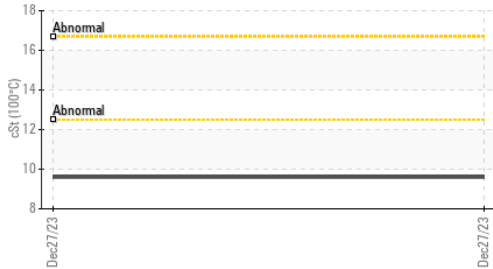

Viscosity @ 100°C

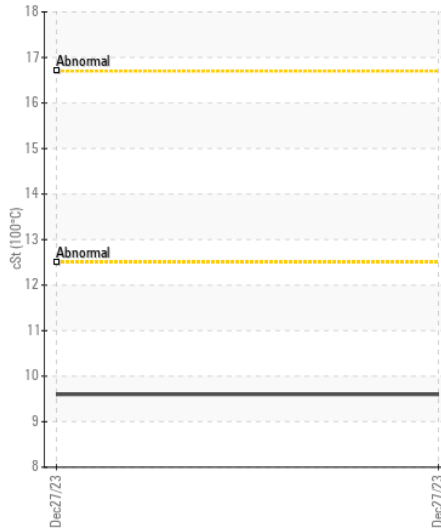

Base Number

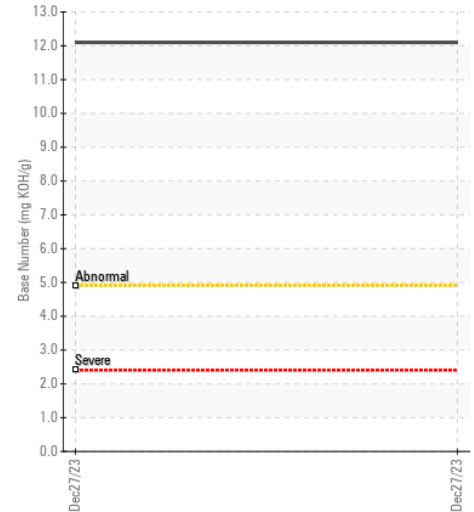

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0184760 **Received** : 12 Jan 2024
Lab Number : 06060042 **Diagnosed** : 16 Jan 2024
Unique Number : 10831424 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - EDINBURG
 601 NORTH MAIN ST
 WOODSTOCK, VA
 US 22664

Contact: MIKE SECHLER
 MSECHLER@JAMESRIVEREQUIPMENT.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: