



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(34725UA)

Machine Id
812055

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0108330	GFL0098256	GFL0083915
Sample Date		Client Info		11 Jan 2024	19 Dec 2023	12 Oct 2023
Machine Age	hrs	Client Info		4213	4037	3550
Oil Age	hrs	Client Info		3008	3319	2930
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	30	9
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	17	0
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	<1	2	<1
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	6	3
Potassium	ppm	ASTM D5185m	>20	1	14	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.6	0.2
Nitration	Abs/cm	*ASTM D7624	>20	5.8	8.5	5.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	18.8	17.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	4	8	0
Boron	ppm	ASTM D5185m	250	13	9	11
Barium	ppm	ASTM D5185m	10	0	<1	2
Molybdenum	ppm	ASTM D5185m	100	58	63	57
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	450	943	966	816
Calcium	ppm	ASTM D5185m	3000	1082	1123	1015
Phosphorus	ppm	ASTM D5185m	1150	1070	1125	947
Zinc	ppm	ASTM D5185m	1350	1238	1304	1085
Sulfur	ppm	ASTM D5185m	4250	3119	3071	2771
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.3	15.4	13.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.7	7.6	8.5
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	12.7	13.6

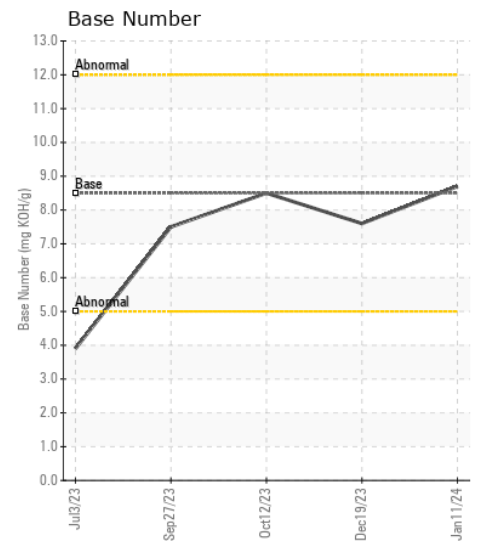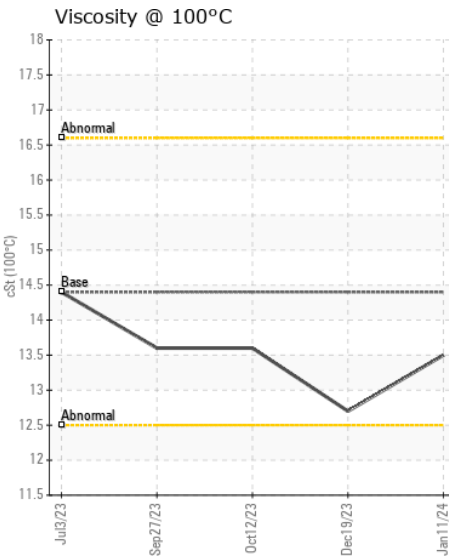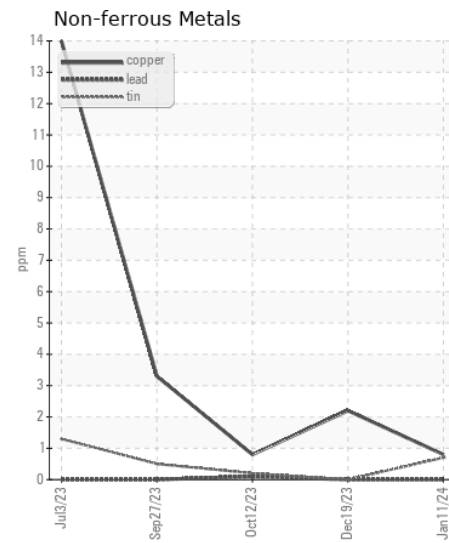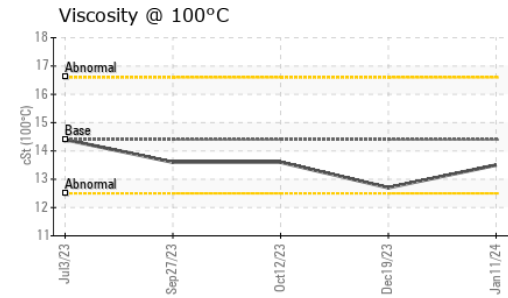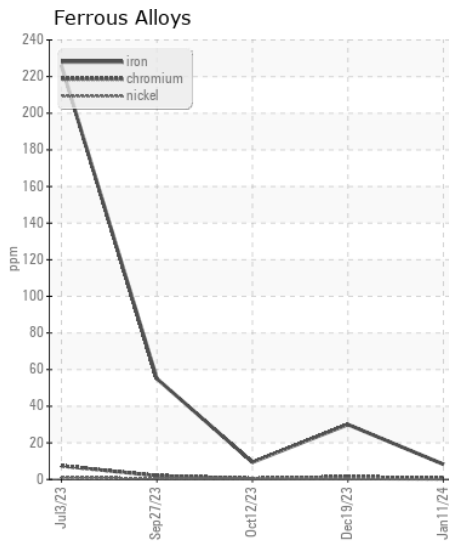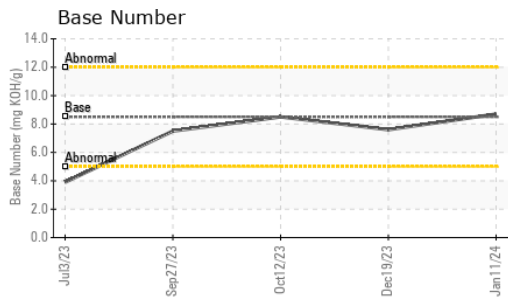

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108330 **Received** : 12 Jan 2024
Lab Number : 06060080 **Diagnosed** : 16 Jan 2024
Unique Number : 10831462 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: