



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
VOLVO 002374 (S/N 314224)
 Component
Diesel Engine
 Fluid
SHELL 15W40 (15 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the oil.

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0800513	WC0724615	WC0724680
Sample Date		Client Info		05 Dec 2023	08 Aug 2023	03 May 2023
Machine Age	hrs	Client Info		4262	3820	3299
Oil Age	hrs	Client Info		442	521	533
Filter Age	hrs	Client Info		442	521	533
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ATTENTION
Iron	ppm	ASTM D5185m	>100	9	8	8
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	2	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>25	3	2	1
Lead	ppm	ASTM D5185m	>40	<1	1	<1
Copper	ppm	ASTM D5185m	>330	2	2	3
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	12	8	6
Potassium	ppm	ASTM D5185m	>20	0	0	2
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	10.6	10.7	11.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	22.8	22.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>150	7	10	8
Boron	ppm	ASTM D5185m		21	10	17
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		89	94	85
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		77	97	78
Calcium	ppm	ASTM D5185m		1969	2188	2095
Phosphorus	ppm	ASTM D5185m		1011	970	957
Zinc	ppm	ASTM D5185m		1152	1166	1193
Sulfur	ppm	ASTM D5185m		3400	4094	3973
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	16.1	15.9
Base Number (BN)	mg KOH/g	ASTM D2896		4.8	4.2	4.3
Visc @ 100°C	cSt	ASTM D445		▲ 12.3	▲ 12.1	▲ 12.4


▲ Viscosity @ 100°C

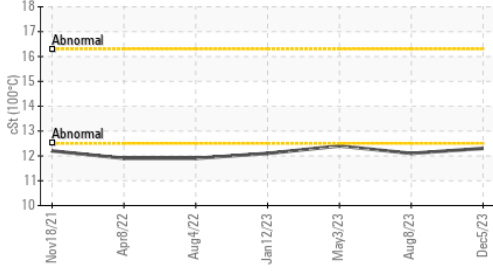


Ferrous Alloys

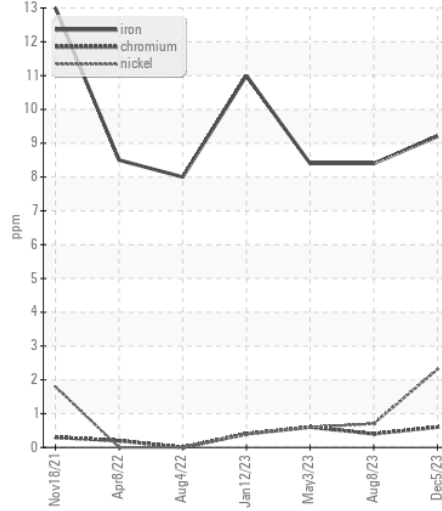


Base Number

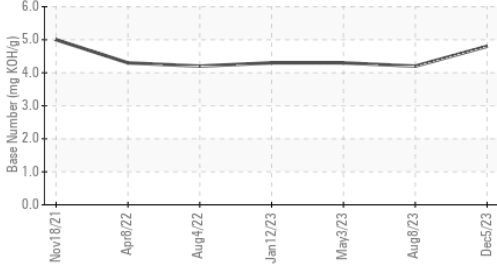


Non-ferrous Metals

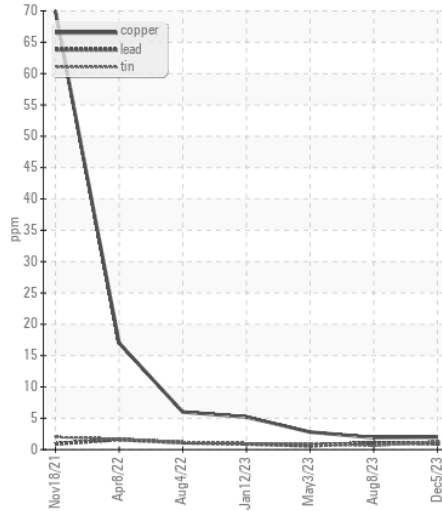

▲ Viscosity @ 100°C

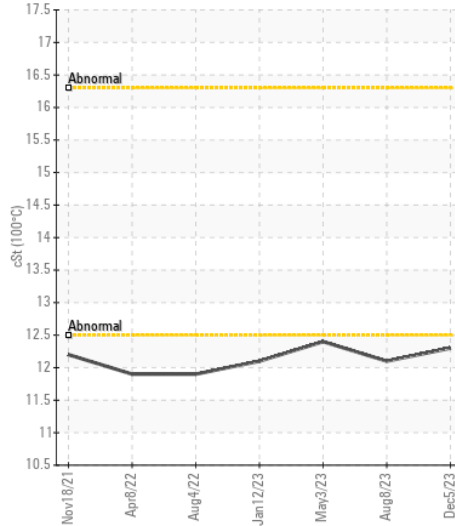

Base Number

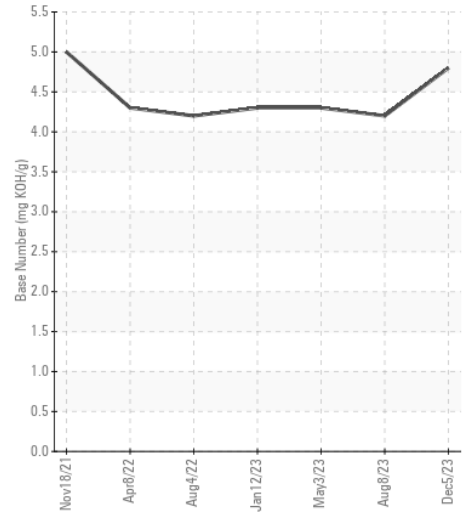

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0800513 **Received** : 12 Jan 2024
Lab Number : 06060096 **Diagnosed** : 16 Jan 2024
Unique Number : 10831478 **Diagnostician** : Doug Bogart
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CJ MILLER LLC
 2903 DEDE RD
 FINKSBURG, MD
 US 21048
 Contact: JOE ROSS
 jross@cjmillerllc.com
 T: (410)239-8006
 F: (410)239-1051