



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[CSX]
Machine Id

JOHN DEERE 35G 1FF035GXENK297551

Component

Hydraulic System

Fluid

HITACHI HYDRAULIC SUPER EX 46HN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0184757	---	---
Sample Date		Client Info		27 Dec 2023	---	---
Machine Age	hrs	Client Info		120	---	---
Oil Age	hrs	Client Info		120	---	---
Filter Age	hrs	Client Info		120	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	13	---	---
Iron	ppm	ASTM D5185m	>32	3	---	---
Chromium	ppm	ASTM D5185m	>9	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	2	---	---
Lead	ppm	ASTM D5185m	>28	0	---	---
Copper	ppm	ASTM D5185m	>50	4	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<1	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	8930	---	---
Particles >6µm		ASTM D7647	>20000	1364	---	---
Particles >14µm		ASTM D7647	>640	46	---	---
Particles >21µm		ASTM D7647	>160	11	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	20/18/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		12	---	---
Calcium	ppm	ASTM D5185m		25	---	---
Phosphorus	ppm	ASTM D5185m	827	454	---	---
Zinc	ppm	ASTM D5185m	0	29	---	---
Sulfur	ppm	ASTM D5185m	13	1175	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.084	---	---
Visc @ 40°C	cSt	ASTM D445	47	46.4	---	---

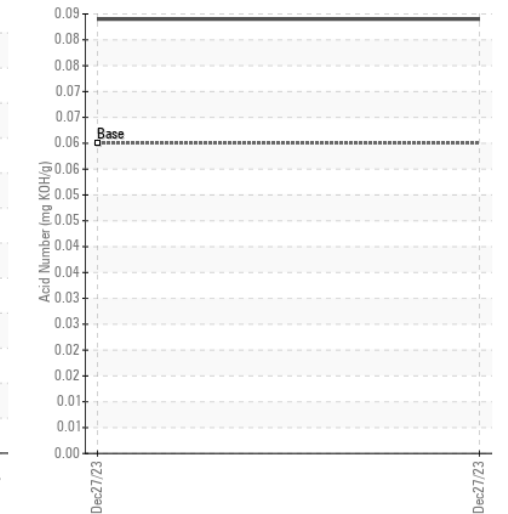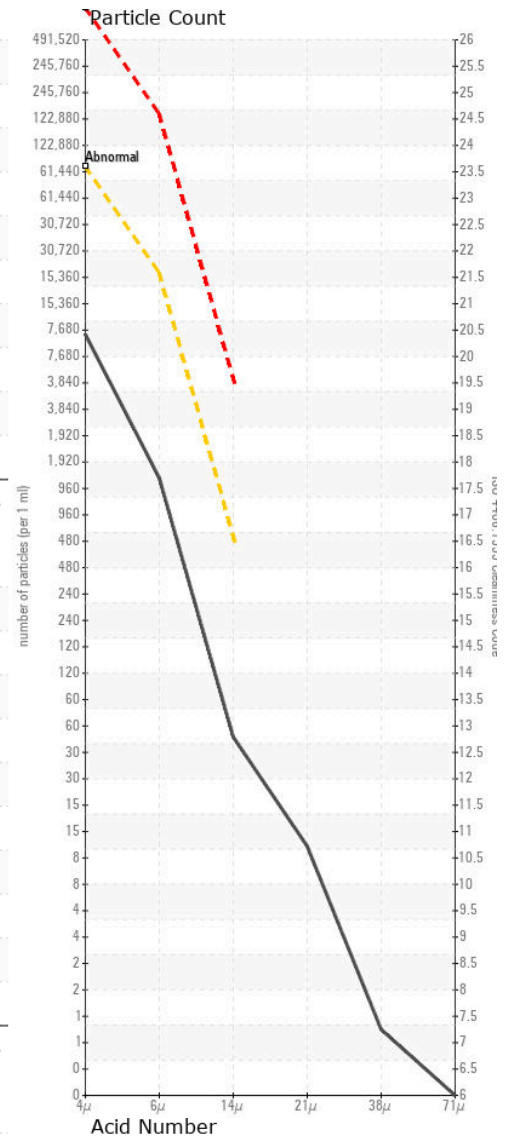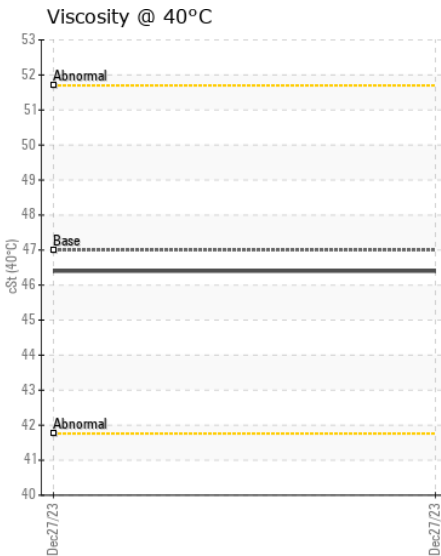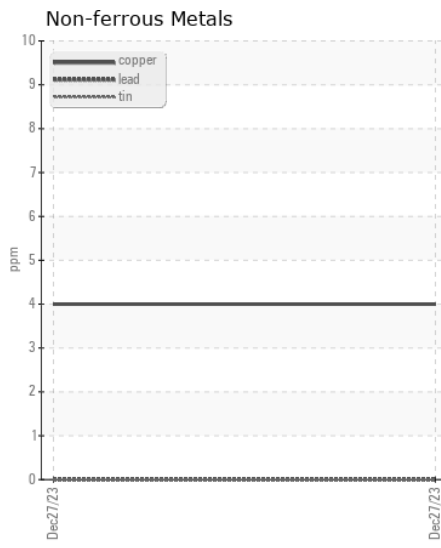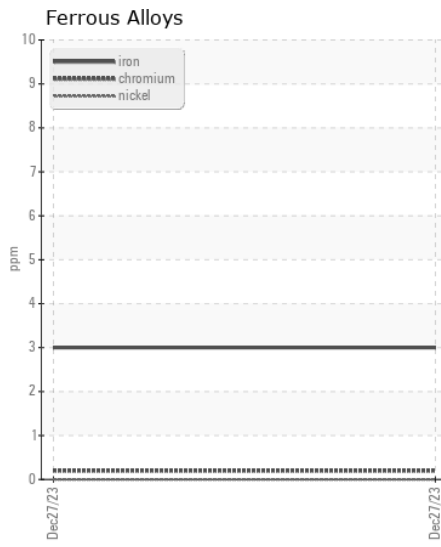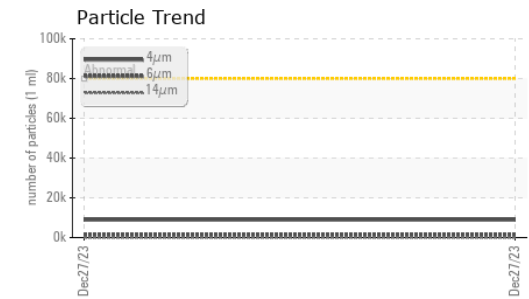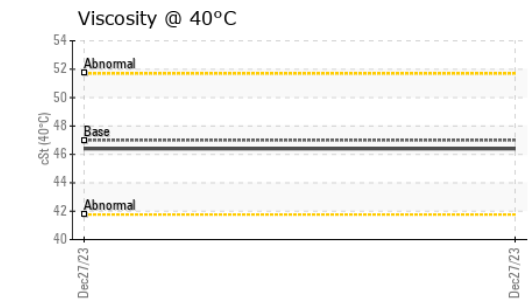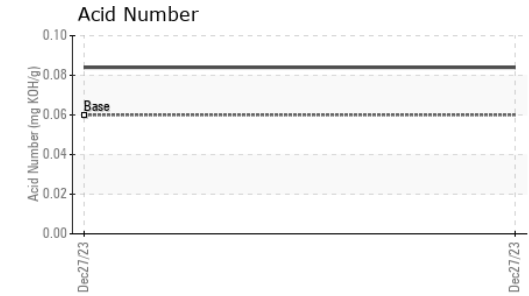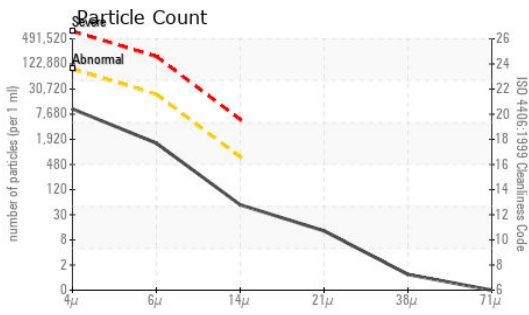

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0184757 **Received** : 12 Jan 2024
Lab Number : 06060129 **Diagnosed** : 16 Jan 2024
Unique Number : 10831511 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - EDINBURG
 601 NORTH MAIN ST
 WOODSTOCK, VA
 US 22664

Contact: MIKE SECHLER
 MSECHLER@JAMESRIVEREQUIPMENT.COM

T:
 F: