



| | |
|-----------------|-----------------|
| WEAR | ABNORMAL |
| CONTAMINATION | ABNORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 3032E 1LV3032EHAH312055

Component
Hydraulic System

Fluid
JOHN DEERE HY-GARD HYD/TRANS LOW VIS (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | JR0196658 | JR0041720 | --- |
| Sample Date | | Client Info | | 08 Jan 2024 | 19 Mar 2020 | --- |
| Machine Age | hrs | Client Info | | 456 | 301 | --- |
| Oil Age | hrs | Client Info | | 456 | 301 | --- |
| Filter Age | hrs | Client Info | | 456 | 301 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | Not Changd | Not Changd | --- |
| Sample Status | | | | ABNORMAL | ABNORMAL | --- |

WEAR

The iron level is abnormal. All other metal levels are typical for a new component breaking in.

| PQ | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--------------|--------|-------------|-----------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >20 | ▲ 43 | 14 | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Silver | ppm | ASTM D5185m | | 1 | <1 | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | 2 | --- |
| Lead | ppm | ASTM D5185m | >10 | 2 | <1 | --- |
| Copper | ppm | ASTM D5185m | >75 | 40 | 24 | --- |
| Tin | ppm | ASTM D5185m | >10 | 3 | 1 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

| | | | | | | |
|------------------|--------|--------------|-----------|-------------------|------------|-----|
| Silicon | ppm | ASTM D5185m | >20 | 7 | 5 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 6 | 3 | --- |
| Water | | WC Method | >0.1 | NEG | NEG | --- |
| Particles >4µm | | ASTM D7647 | >5000 | ▲ 60506 | ▲ 81441 | --- |
| Particles >6µm | | ASTM D7647 | >1300 | ▲ 2239 | ▲ 3855 | --- |
| Particles >14µm | | ASTM D7647 | >160 | 37 | 67 | --- |
| Particles >21µm | | ASTM D7647 | >40 | 10 | 20 | --- |
| Particles >38µm | | ASTM D7647 | >10 | 0 | 1 | --- |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | ▲ 23/18/12 | ▲ 24/19/13 | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|----|-------------|-------|-----|
| Sodium | ppm | ASTM D5185m | | 0 | 4 | --- |
| Boron | ppm | ASTM D5185m | | 2 | 4 | --- |
| Barium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 2 | 1 | --- |
| Manganese | ppm | ASTM D5185m | | 1 | 1 | --- |
| Magnesium | ppm | ASTM D5185m | | 115 | 102 | --- |
| Calcium | ppm | ASTM D5185m | | 3762 | 3500 | --- |
| Phosphorus | ppm | ASTM D5185m | | 1081 | 1032 | --- |
| Zinc | ppm | ASTM D5185m | | 1348 | 1191 | --- |
| Sulfur | ppm | ASTM D5185m | | 3999 | 2638 | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 1.05 | 1.247 | --- |
| Visc @ 40°C | cSt | ASTM D445 | 32 | 29.5 | 30.5 | --- |

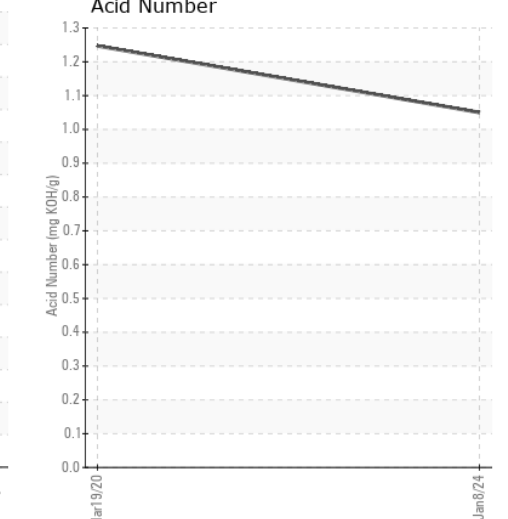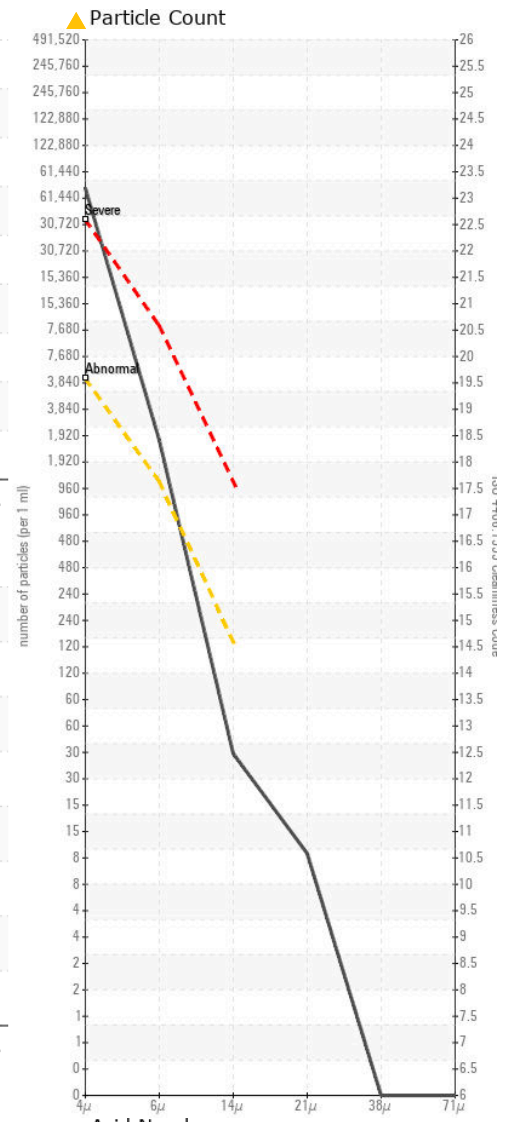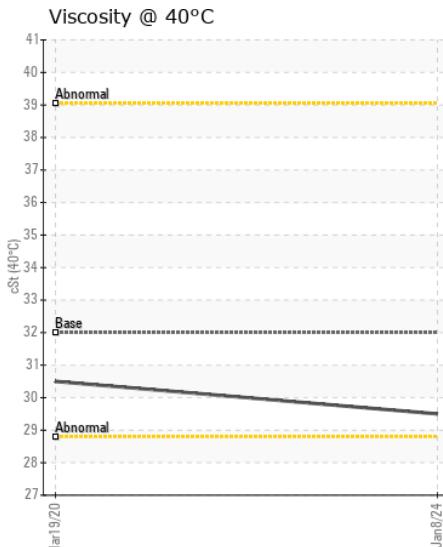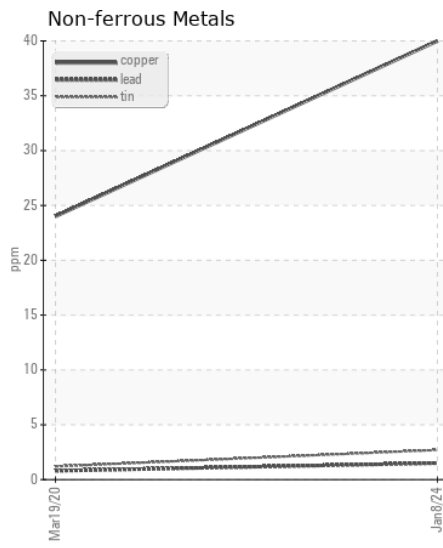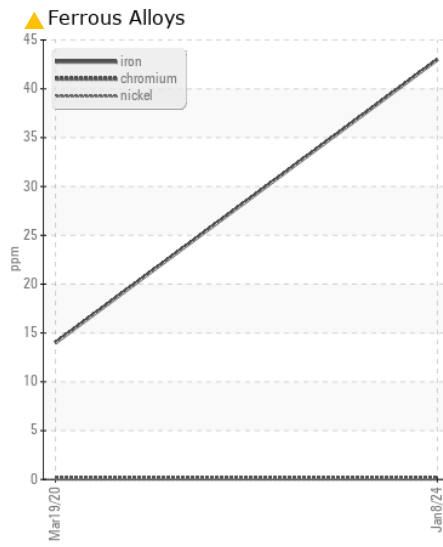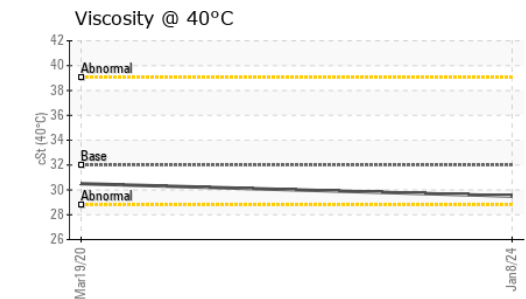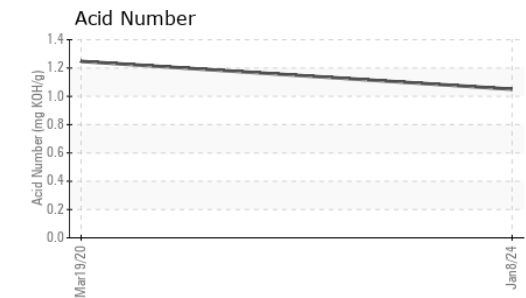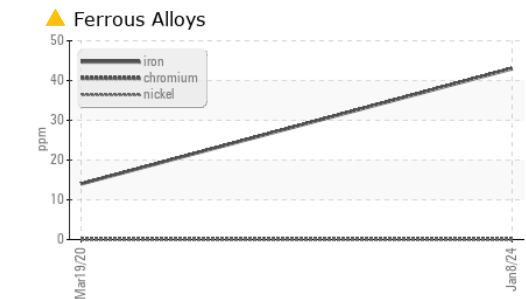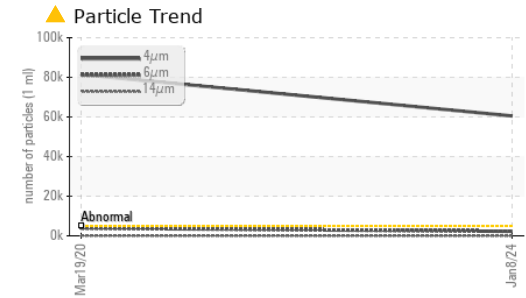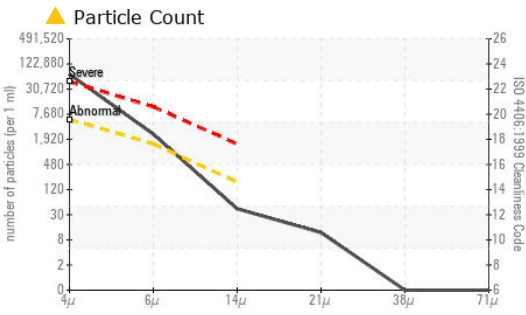

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196658 **Received** : 12 Jan 2024
Lab Number : 06060137 **Diagnosed** : 16 Jan 2024
Unique Number : 10831519 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - BURKEVILLE
 510 WEST COLONIAL DR
 BURKEVILLE, VA
 US 23922

Contact: BRANDON BOLLING
 bbolling@jamesriverequipment.com

T: (434)767-5578
 F: (434)767-3774