



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MULTI PRESS 1623
Component
Hydraulic System
Fluid
MOBIL DTE 26 (700 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ST44425	ST44989	ST39929
Sample Date		Client Info		27 Nov 2023	05 Jan 2023	16 Nov 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	8	6	3
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	<1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	15	13	13
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>15	1	<1	<1
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.05	0.026	0.018	0.015
ppm Water	ppm	ASTM D6304	>500	269	186.4	151.9
Particles >4µm		ASTM D7647	>2500	1495	1879	▲ 17946
Particles >6µm		ASTM D7647	>640	116	433	▲ 6458
Particles >14µm		ASTM D7647	>80	13	13	▲ 664
Particles >21µm		ASTM D7647	>20	4	2	▲ 102
Particles >38µm		ASTM D7647	>4	0	0	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/16/13	18/14/11	18/16/11	▲ 21/20/17
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	3
Boron	ppm	ASTM D5185m		0	0	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		3	0	0
Calcium	ppm	ASTM D5185m		46	42	41
Phosphorus	ppm	ASTM D5185m		481	391	371
Zinc	ppm	ASTM D5185m		546	518	458
Sulfur	ppm	ASTM D5185m		9761	8609	6598
Acid Number (AN)	mg KOH/g	ASTM D8045		0.93	1.02	0.891
Visc @ 40°C	cSt	ASTM D445	71.2	65.5	64.9	74.0

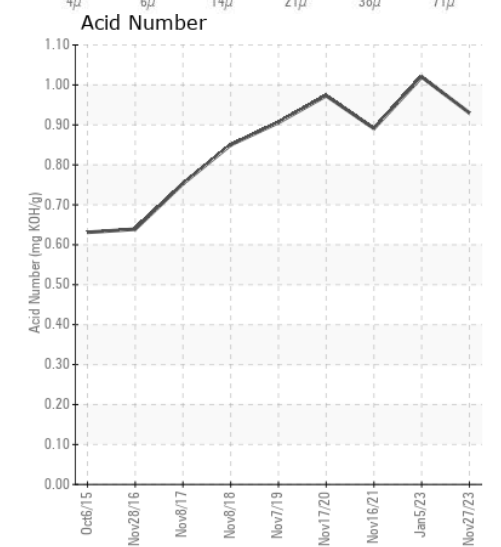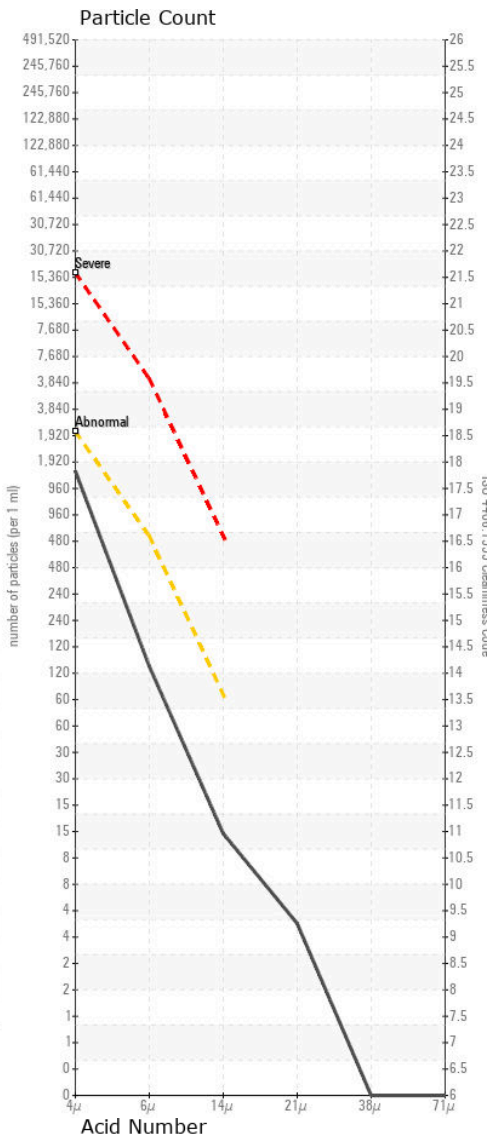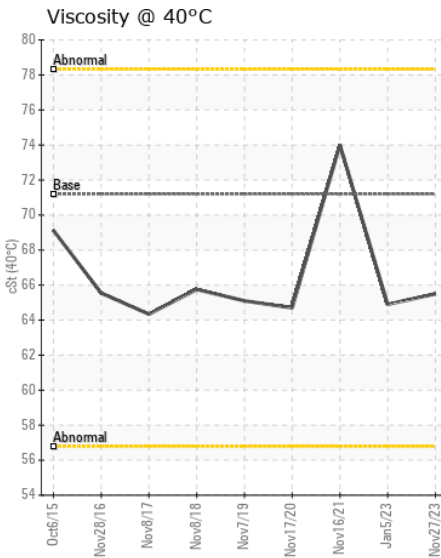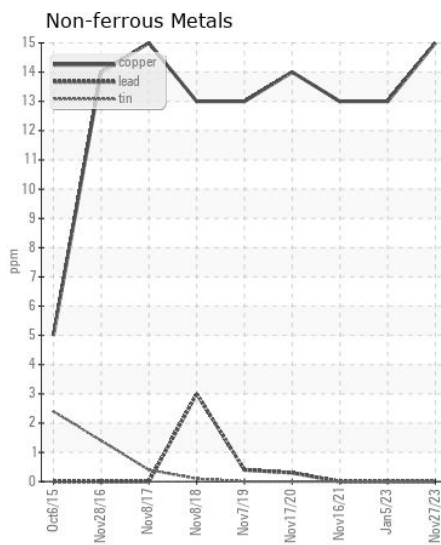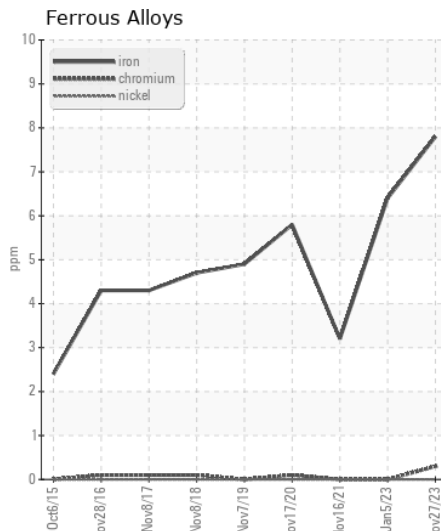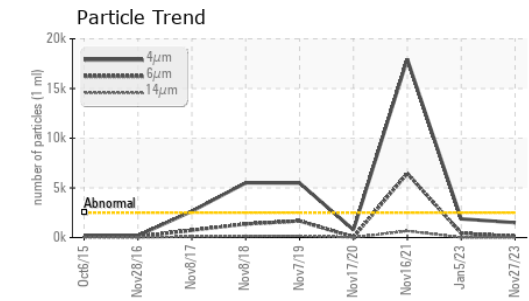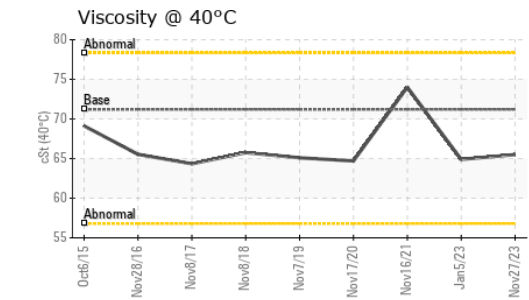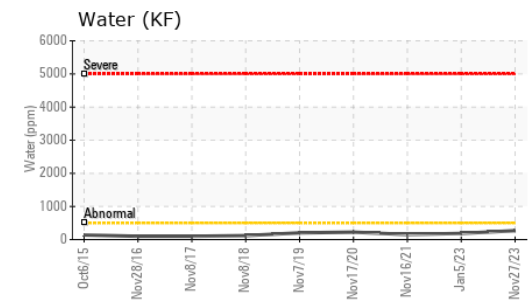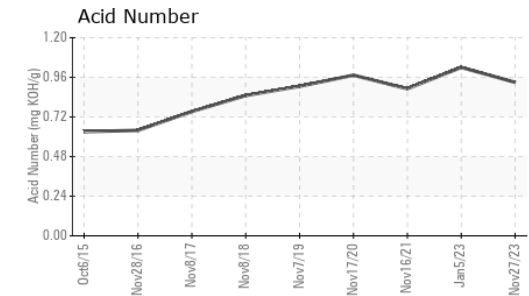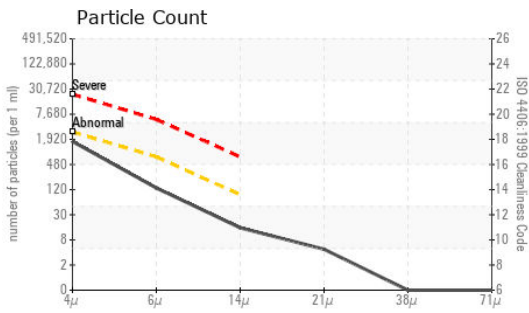

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ST44425 **Received** : 12 Jan 2024
Lab Number : 06060228 **Diagnosed** : 16 Jan 2024
Unique Number : 10831610 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF)

LARSON TOOL & STAMPING CO
 90 OLIVE ST
 ATTLEBORO, MA
 US 02703
 Contact: GARY BRUNE
 gbrune@larsonstool.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: