



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
DANIELI CARROS ARTESA
 Component
Hydraulic System
 Fluid
ANDEROL BIO GUARD FRHF 46 (--- LTR)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN06060254	AN06060239	AN05974963
Sample Date		Client Info		10 Nov 2023	04 Oct 2023	01 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	ATTENTION
Iron	ppm	ASTM D5185m	>20	<1	<1	0
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	1
Water	%	ASTM D6304	>0.05	0.043	0.041	0.037
ppm Water	ppm	ASTM D6304	>500	430	414	379.0
Particles >4µm		ASTM D7647	>5000	▲ 10090	▲ 7388	▲ 7860
Particles >6µm		ASTM D7647	>1300	863	692	▲ 1310
Particles >14µm		ASTM D7647	>160	10	10	96
Particles >21µm		ASTM D7647	>40	2	4	40
Particles >38µm		ASTM D7647	>10	1	1	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/17/10	▲ 20/17/10	▲ 20/18/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	4
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	196	231	232	200
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	1440	1817	1863	1732
Acid Number (AN)	mg KOH/g	ASTM D8045	1	0.97	0.98	1.04
Visc @ 40°C	cSt	ASTM D445	45.41	48.3	48.2	48.1

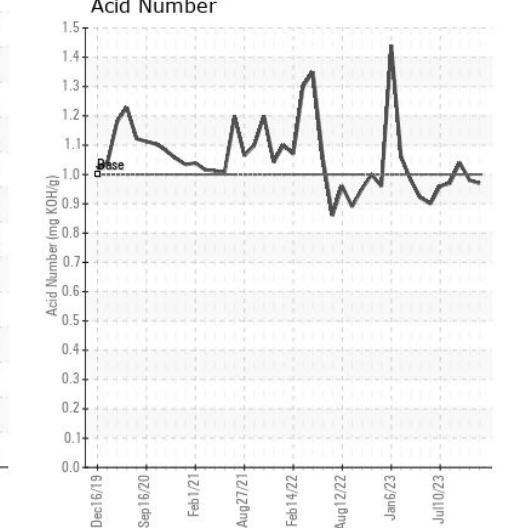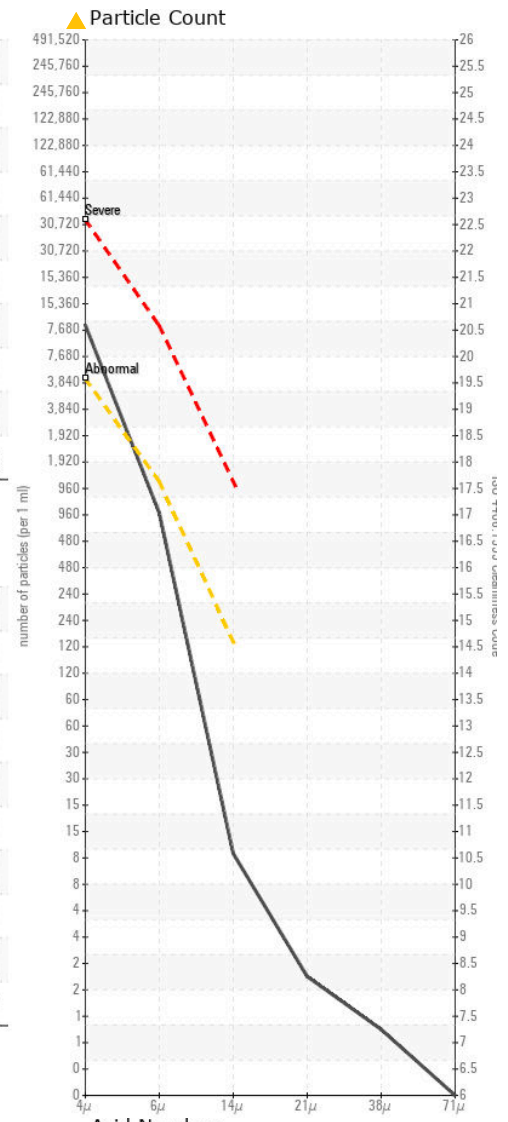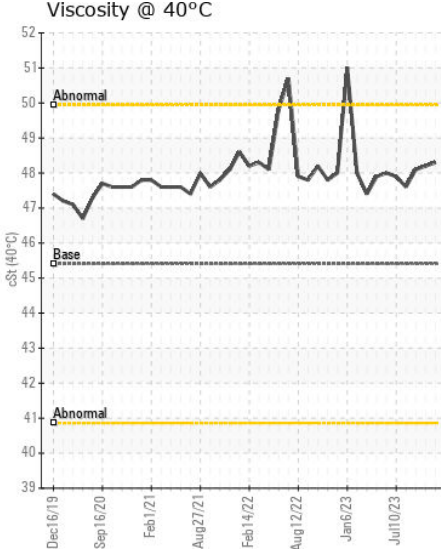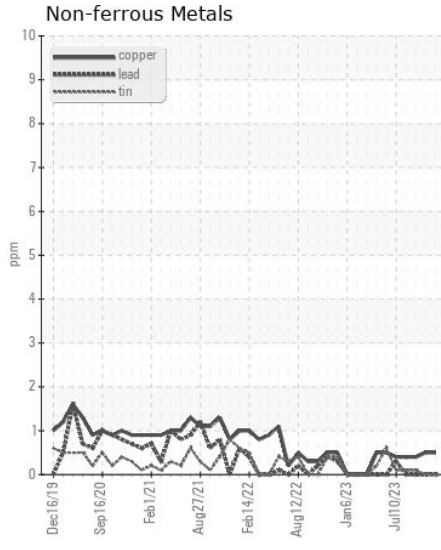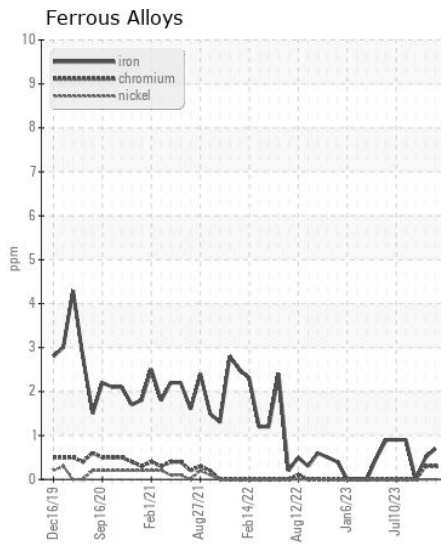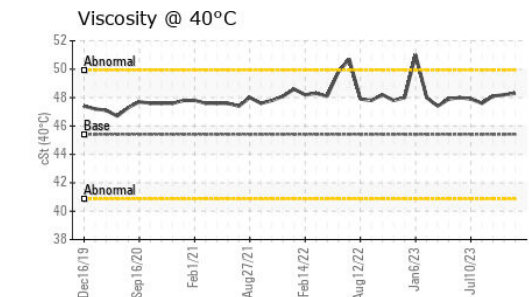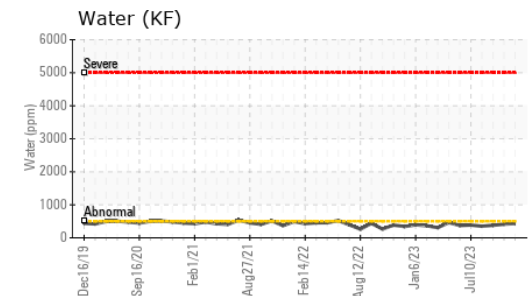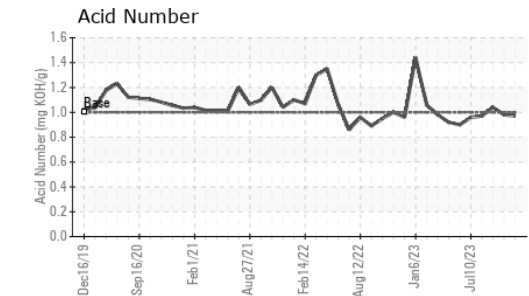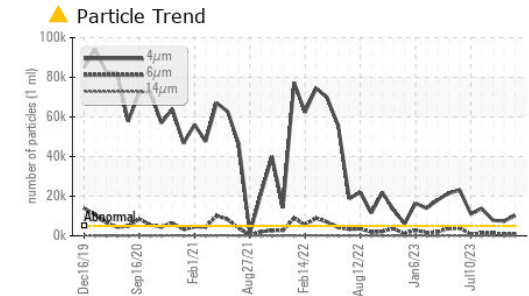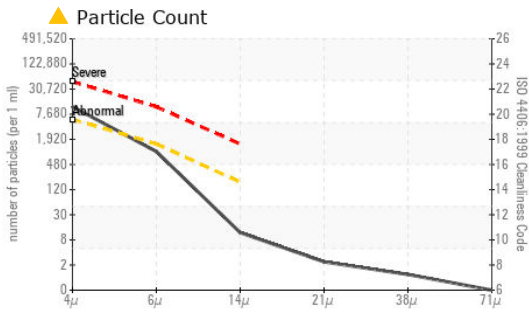

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN06060254 **Received** : 12 Jan 2024
Lab Number : 06060254 **Diagnosed** : 16 Jan 2024
Unique Number : 10831636 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: PrtCount)

CONEXO INC
 2320 STARR LAKE DRIVE
 ACWORTH, GA
 US 30101
 Contact: RICARDO HEIN
 rhein@conexoinc.com
 T: (678)806-0131
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)