



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
LOUISIANA SUN
Component
Port Reduction Gear
Fluid
CHEVRON DELO 400 LE 15W40 (12 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0050865	MW0056918	MWM696308
Sample Date		Client Info		05 Jan 2024	21 Jun 2023	01 May 2022
Machine Age	hrs	Client Info		26113	25375	25418
Oil Age	hrs	Client Info		0	1600	800
Filter Age	hrs	Client Info		0	1600	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	2	6	5
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	3	2	2
Lead	ppm	ASTM D5185m	>100	1	0	<1
Copper	ppm	ASTM D5185m	>50	53	32	12
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	6	5	5
Potassium	ppm	ASTM D5185m	>20	<1	<1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	<1
Boron	ppm	ASTM D5185m		358	441	325
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		118	125	39
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		633	648	71
Calcium	ppm	ASTM D5185m		1572	1694	2285
Phosphorus	ppm	ASTM D5185m	1200	789	769	690
Zinc	ppm	ASTM D5185m	1300	876	868	777
Sulfur	ppm	ASTM D5185m	3200	2612	3196	2401
Acid Number (AN)	mg KOH/g	ASTM D8045		1.15	1.09	0.20
Visc @ 40°C	cSt	ASTM D445	125	82.0	83.6	131

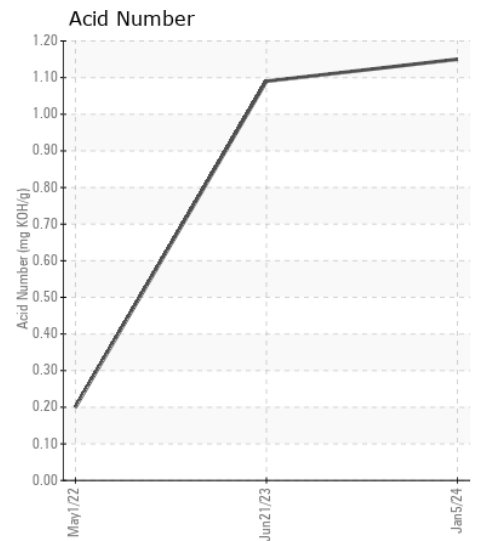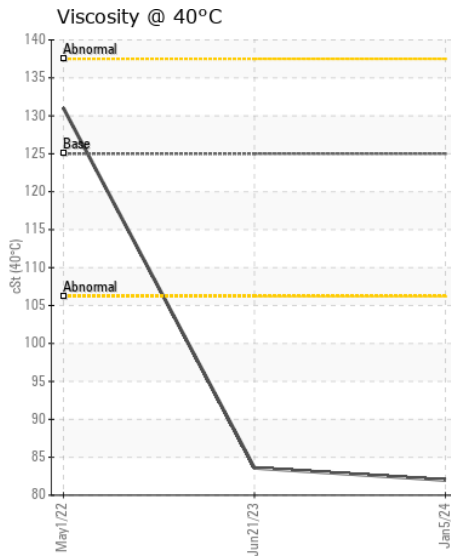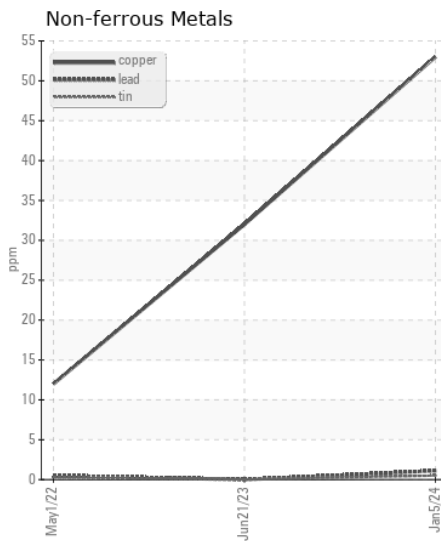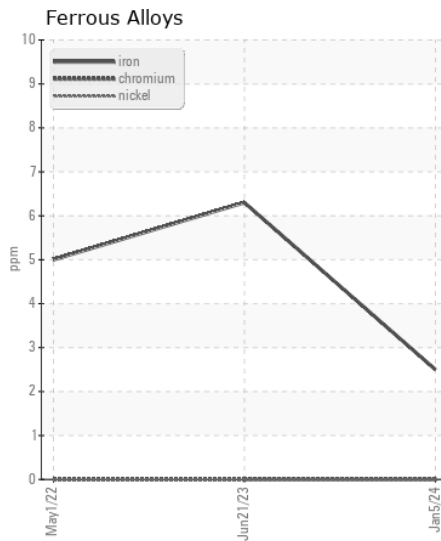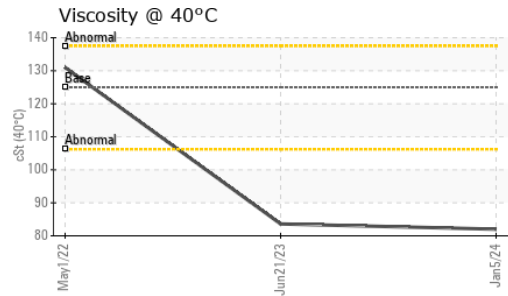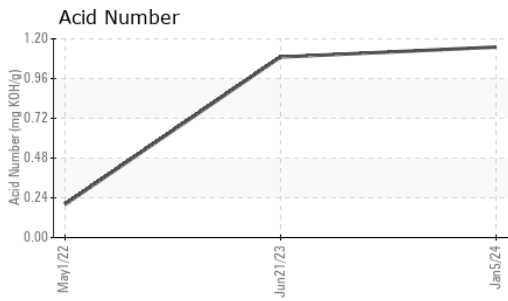

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0050865 **Received** : 12 Jan 2024
Lab Number : 06060339 **Diagnosed** : 16 Jan 2024
Unique Number : 10831721 **Diagnostician** : Don Baldrige
Test Package : MAR 2

AMERICAN RIVER TRANSPORTATION CO
 8400 RIVER RD, PO BOX 656
 WESTWEGO, LA
 US 70094-2317
 Contact: KEVIN CHIASSON
 kevin.chiasson@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: