



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 4 - Fairmont [RO#145877]**  
Machine Id  
**JOHN DEERE 672G 1DW672GXAKF701302**  
Component  
**Right 6WD Hub**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (2 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0047028</b>	LEC0034115	LEC0012883
Sample Date		Client Info		<b>11 Jan 2024</b>	19 Aug 2022	03 Nov 2020
Machine Age	hrs	Client Info		<b>1209</b>	854	428
Oil Age	hrs	Client Info		<b>1209</b>	854	428
Filter Age	hrs	Client Info		<b>1209</b>	428	428
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>41</b>	77	86
Iron	ppm	ASTM D5185m	>200	<b>43</b>	163	122
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m		<b>1</b>	6	4
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>5</b>	7	7
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	6	5
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Boron	ppm	ASTM D5185m	6	<b>3</b>	2	5
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	3	2
Magnesium	ppm	ASTM D5185m	145	<b>110</b>	87	98
Calcium	ppm	ASTM D5185m	3570	<b>3391</b>	3342	3507
Phosphorus	ppm	ASTM D5185m	1290	<b>1108</b>	982	1020
Zinc	ppm	ASTM D5185m	1640	<b>1289</b>	1164	1226
Sulfur	ppm	ASTM D5185m		<b>3523</b>	3346	3019
Visc @ 40°C	cSt	ASTM D445	57.0	<b>57.1</b>	54.8	55.8

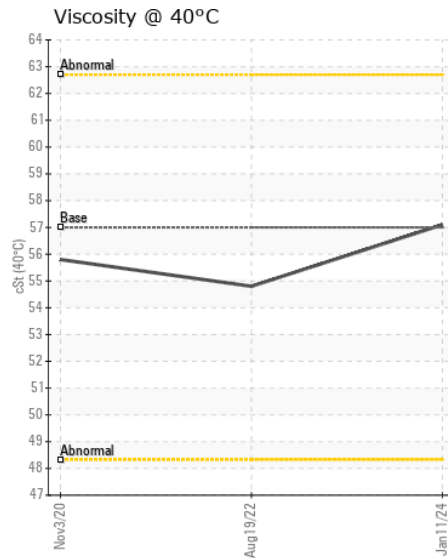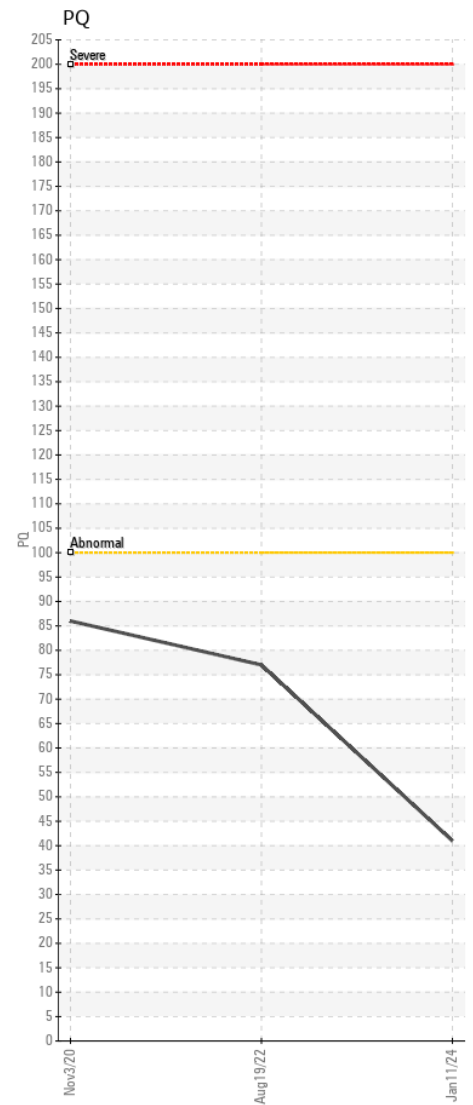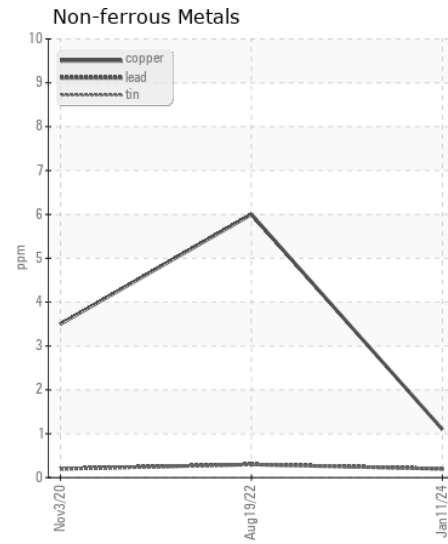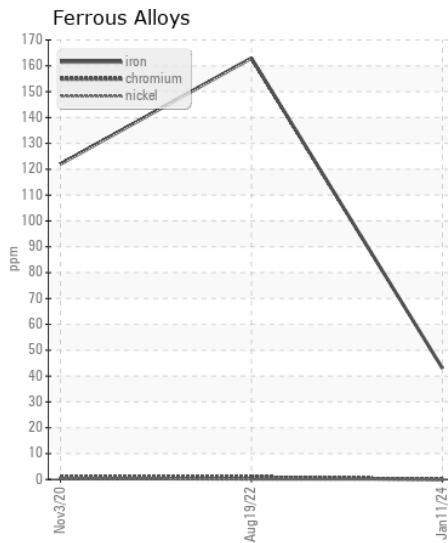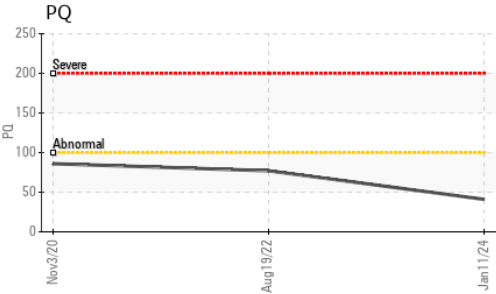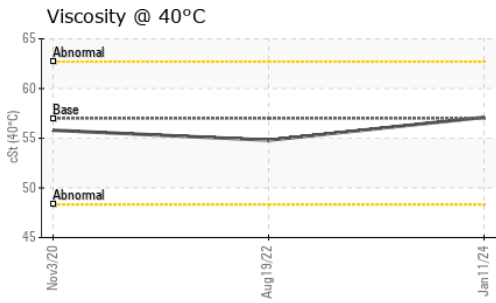

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0047028 **Received** : 12 Jan 2024  
**Lab Number** : 06060445 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831827 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570