



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
TAKEUCHI TL10V2 410007383
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0000502	---	---
Sample Date		Client Info		10 Jan 2024	---	---
Machine Age	hrs	Client Info		30	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	21	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	12	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel	%	ASTM D3524	>5	0.3	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>158	11	---	---
Boron	ppm	ASTM D5185m	250	15	---	---
Barium	ppm	ASTM D5185m	10	2	---	---
Molybdenum	ppm	ASTM D5185m	100	10	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	450	75	---	---
Calcium	ppm	ASTM D5185m	3000	2201	---	---
Phosphorus	ppm	ASTM D5185m	1150	994	---	---
Zinc	ppm	ASTM D5185m	1350	1069	---	---
Sulfur	ppm	ASTM D5185m	4250	3808	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.5	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.4	---	---


▲ Viscosity @ 100°C

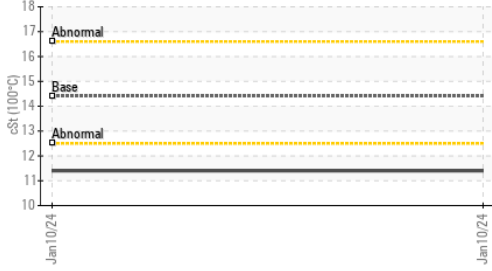


Ferrous Alloys

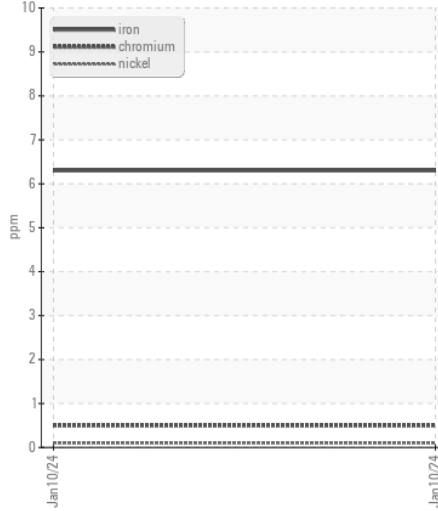


Fuel Dilution

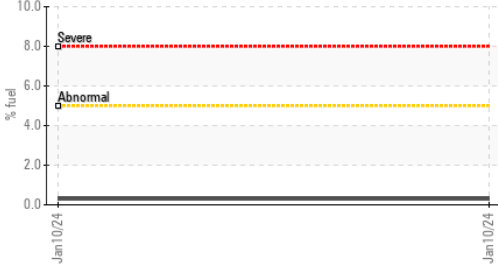


Non-ferrous Metals

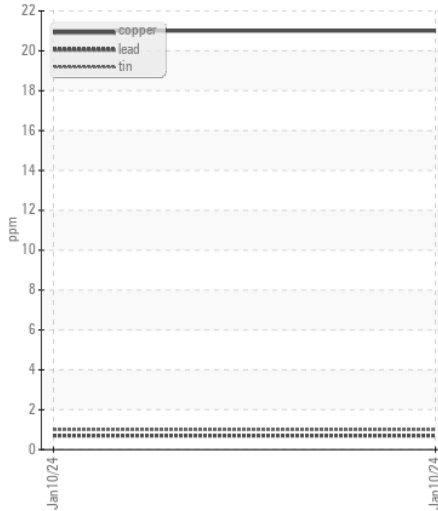


Base Number

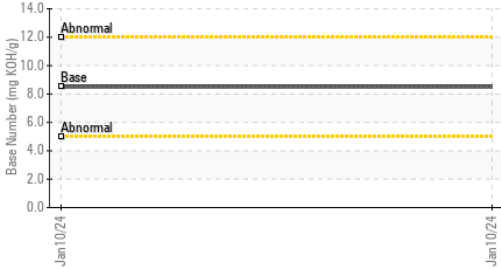

▲ Viscosity @ 100°C

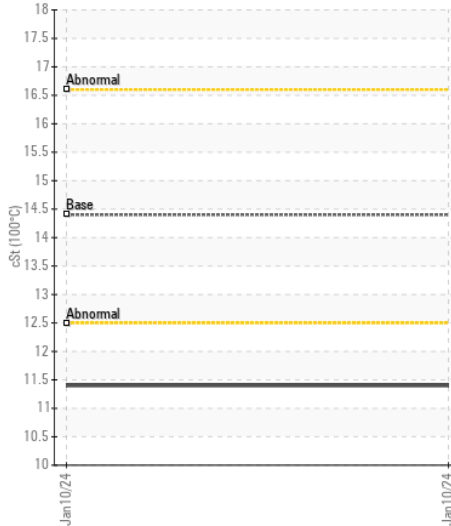

Base Number

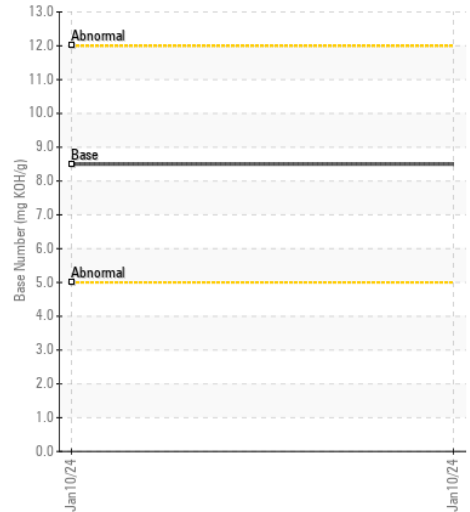

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0000502 **Received** : 16 Jan 2024
Lab Number : 06060541 **Diagnosed** : 18 Jan 2024
Unique Number : 10831923 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

MCCLEUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFFE
 KRATLIFFE@MCCLEUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (804)266-1611